

# PRICE LIST 2025/2026

EASTERN COUNTRIES



**PALAZZETTI**  
WARMTH WITH NATURAL APPEAL



# Key of symbols



**New Product**



**Heating by air through radiation**



**Fan-assisted air heating**



**Ductable air heating**



**Twin Air System optional**  
Ducted air heating



**Twin Air System**  
Ducted air heating



**Air Pro System**  
Air heating system with up to 3 fans



**Zero Speed Fan**  
The fan can be turned off altogether to enjoy heat diffused by radiation and natural convection. This saves electricity and increases acoustic comfort.



**Universal Gateway and App**  
Allows you to manage the main stove operating parameters locally (when used as a remote control) or remotely (when connected to the internet) with just a smartphone and a specific app.



**Palazzetti Vox**  
Lets you manage the functions of Palazzetti pellet stoves by means of voice commands through devices provided with voice assistants. Palazzetti's Connection Box is required to use Palazzetti Vox.



**Sealed Technology**  
The special p.a.c. (primary air circuit) supplies both the combustion air and the door wash air, drawing it directly from outdoors.



**Self Clean System**  
Flue gas tube heat exchangers and a self-cleaning burn pot.



**Water-Heating**



**Heating by water or air**



**O<sub>2</sub> Ring**  
Device composed of active elements that, when they enter in contact with combustion fumes, start a controlled chemical reaction that neutralises up to an average of 80% particulates and carbon monoxide (CO).



**Tecnologia After Flame (Accumulation)**  
Heat continues to be radiated for up to 10 hours after the fire has gone out.



**TC-Complete Burning System**  
Total-combustion stove (TC) which produces less ash.



**US-Upper Smoke Technology**  
The top flue gas outlet lets the stove be installed flush with the wall. A top coaxial flue gas outlet is also available, i.e. a single coaxial tube through which the flue gasses can exit and the combustion air can be drawn in.



**Tecnologia Easytech4wood**  
Innovative technology for wood-burning products, designed for the fully-automatic control of all kinds of stove functions by means of a remote control or smartphone app.



**Twister Flue**  
This accessory is designed for the Ecopalex' star range. It further enhances the stove's already exceptional performances.



**T3 Technology**  
T3 is a new firebox for air-heating stoves that contains the best of Palazzetti's technologies and is available with two burn pot configurations:

- 1. a static, cast iron burn pot** featuring multi-phase combustion and a more natural and enveloping view of the fire (Soft Flame).
- 2. a total combustion burn pot** featuring the Complete Burning System and the Self Cleaning System.



**THE CODES IN RED INDICATE PRODUCTS WITH A LIMITED AVAILABILITY**



Ecofire Vivì TC

# Index of contents

---

This price list comes into force on 1<sup>st</sup> September 2025.



## 93 MULTI-FUEL HYBRID FIREBOXES

**Air-heating Multifire range** p. 94  
**Hydronic Multifire range** p. 96

## 04 ECOFIRE® PELLET STOVES

**Ecofire® stoves classified  
by their heat output** p. 04  
**Air-heating Ecofire®  
space-saving range** p. 12  
**Air-heating Ecofire® range** p. 17  
**Hydronic Ecofire® range** p. 49

## 99 WOOD-BURNING FIREBOXES

**Ecopalex®** p. 99  
**Ecomonoblocco** p. 107  
**Monoblocco Termopalex** p. 139

## 65 BOILERS

**Pellet-burning boilers** p. 66

## 69 WOOD-BURNING STOVES

**Air-heating stove  
range** p. 70



## 143 ACCESSORIES

## 85 ECOFIRE® PELLET FIREBOXES

**Air-heating Ecofire® for building in** p. 86  
**Hydronic Ecofire® for building in** p. 90

## 163 COMPLEMENTARY ACCESSORIES

## 172 GENERAL CONDITIONS OF SALE

# Ecofire® / AIR-HEATING pellet stoves

6  
kW



Ecofire®	EMILY TC	EMILY TC US	FLO TC	LIA
Maximum fuel capacity <b>kg</b>	22	16	15	15
Page	18	19	17	25

6  
kW



Ecofire®	MARIANNE US	SCARLET	SCARLET US	THEO TC
Maximum fuel capacity <b>kg</b>	19	20	20	22
Page	28	13	14	20

6  
kW



Ecofire®	THEO TC US	VIVI TC	VIVI TC US
Maximum fuel capacity <b>kg</b>	16	22	16
Page	21	22	23

8  
kW



Ecofire®	LIA	MELITA	MICHELLE US	MILÙ	NINA
Maximum fuel capacity <b>kg</b>	15	18	25	16	18
Page	25	26	15	24	27

# Ecofire® / AIR-HEATING pellet stoves

9  
kW



Ecofire®	BIANCA LUX	CESARE II	CLELIA TC	CLELIA TC US
Maximum fuel capacity <b>kg</b>	22	15	18	15
Page	31	12	34	35

9  
kW



Ecofire®	EMILY TC	EMILY TC US	FLO TC	GIORGIA
Maximum fuel capacity <b>kg</b>	22	16	15	24
Page	18	19	17	46

9  
kW



Ecofire®	LILIBET	LILIBET US	LILIBET TC	LILIBET TC US
Maximum fuel capacity <b>kg</b>	18	15	18	15
Page	36	37	38	39

9  
kW



Ecofire®	MARIANNE US	NADINE	NADINE TC	NADINE US	NADINE TC US
Maximum fuel capacity <b>kg</b>	19	18	18	15	15
Page	28	40	41	42	43

# Ecofire® / AIR-HEATING pellet stoves

9  
kW



Ecofire®	SCARLET	SCARLET US	THEO TC	THEO TC US
Maximum fuel capacity <b>kg</b>	20	20	22	16
Page	13	14	20	21

9  
kW



Ecofire®	VIVI TC	VIVI TC US	VIVIENNE TC	VIVIENNE TC US
Maximum fuel capacity <b>kg</b>	22	16	18	15
Page	22	23	44	45

10  
kW



Ecofire®	TWIGGY US
Maximum fuel capacity <b>kg</b>	25
Page	16

12  
kW



Ecofire®	ANNA	ANNA US	BIANCA LUX	CLELIA US
Maximum fuel capacity <b>kg</b>	22	15	22	15
Page	29	30	31	33

# Ecofire® / AIR-HEATING pellet stoves

12  
kW



Ecofire®	CLELIA TC US	GIORGIA	LILIBET US	LILIBET TC US
Maximum fuel capacity <b>kg</b>	15	24	15	15
Page	35	46	37	39

12  
kW



Ecofire®	NADINE US	NADINE TC US	VIVIENNE TC US
Maximum fuel capacity <b>kg</b>	15	15	15
Page	42	43	45

13  
kW



Ecofire®	CLELIA	CLELIA TC	LILIBET	LILIBET TC
Maximum fuel capacity <b>kg</b>	18	18	18	18
Page	32	34	36	38

13  
kW



Ecofire®	NADINE	NADINE TC	VIVIENNE TC
Maximum fuel capacity <b>kg</b>	18	18	18
Page	40	41	44

# Ecofire® / AIR-HEATING pellet stoves

9  
kW



<b>Ecofire®</b>	<b>JACKIE IDRO TC</b>
Maximum fuel capacity <b>kg</b>	<b>26</b>
<b>Page</b>	

10  
kW



<b>Ecofire®</b>	<b>DADÒ TC</b>	<b>MARTINA IDRO LUX</b>	<b>MIRELLA IDRO</b>
Maximum fuel capacity <b>kg</b>	<b>45</b>	<b>45</b>	<b>25</b>
<b>Page</b>	<b>54</b>	<b>60</b>	<b>62</b>

13  
kW



<b>Ecofire®</b>	<b>TIFFANY IDRO TC</b>	<b>TIFFANY IDRO TC US</b>
Maximum fuel capacity <b>kg</b>	<b>30</b>	<b>30</b>
<b>Page</b>	<b>50</b>	<b>52</b>

14  
kW



<b>Ecofire®</b>	<b>JACKIE IDRO TC</b>
Maximum fuel capacity <b>kg</b>	<b>26</b>
<b>Page</b>	<b>56</b>

# Ecofire® / AIR-HEATING pellet stoves

15  
kW



Ecofire®	DADÒ TC	MARTINA IDRO LUX	MIRELLA IDRO
Maximum fuel capacity <b>kg</b>	45	45	25
Page	54	60	62

20  
kW



Ecofire®	DADÒ TC	JACKIE IDRO VENTILADO TC
Maximum fuel capacity <b>kg</b>	45	26
Page	54	58

21  
kW



Ecofire®	TIFFANY IDRO TC	TIFFANY IDRO TC US
Maximum fuel capacity <b>kg</b>	30	30
Page	50	52

26  
kW



Ecofire®	DADÒ TC	JACKIE IDRO VENTILADO TC
Maximum fuel capacity <b>kg</b>	45	26
Page	54	58



Ecofire® Scarlet

PLEASE NOTE: If the mains voltage does not meet the standard requirements ( $\pm 10\%$  of the nominal voltage) it is advisable to use a voltage stabilizer on all products.

<b>Anna</b> p.29	<b>Melita</b> p.26
<b>Anna US</b> p.30	<b>Michelle US</b> p.15
<b>Bianca Lux</b> p.31	<b>Milù</b> p.24
<b>Cesare II</b> p.12	<b>Nadine</b> p.40
<b>Clelia</b> p.32	<b>Nadine TC</b> p.41
<b>Clelia US</b> p.33	<b>Nadine US</b> p.42
<b>Clelia TC</b> p.34	<b>Nadine TC US</b> p.43
<b>Clelia TC US</b> p.35	<b>Nina</b> p.27
<b>Emily TC</b> p.18	<b>Scarlet</b> p.13
<b>Emily TC US</b> p.19	<b>Scarlet US</b> p.14
<b>Flo TC</b> p.17	<b>Theo TC</b> p.20
<b>Giorgia</b> p.46	<b>Theo TC US</b> p.21
<b>Lia</b> p.25	<b>Twiggy US</b> p.16
<b>Lilibet</b> p.36	<b>Vivi TC</b> p.22
<b>Lilibet US</b> p.37	<b>Vivi TC US</b> p.23
<b>Lilibet TC</b> p.38	<b>Vivienne TC</b> p.44
<b>Lilibet TC US</b> p.39	<b>Vivienne TC US</b> p.45
<b>Marianne US</b> p.28	

# Ecofire® aria stoves

Our range of fan-assisted and ducted,  
air-heating pellet stoves

# Cesare II



## Firebox versions

		€
CESARE II *	805708302	4,110

## Specifications and standard fittings:

- solid structure made by cast iron
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- slide touch-sensitive control panel, located on the back
- operating hours can be programmed on a daily and weekly basis
- the stove can be connected to an external thermostat
- room temperature probe controls the set temperature
- designed for our **Universal Gateway**

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



## Technical features

	CESARE II
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>74x63x80 - 194</b>
Nominal Heat Output <b>kW</b>	<b>9.2</b>
Efficiency <b>%</b>	<b>87.7</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>20 - 4</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.78 - 2.1</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Scarlet



<b>SCARLET TC 6</b>		€
Black Steel	<b>805810600</b>	<b>3,100</b>
Dove gray steel	<b>805810602</b>	<b>3,100</b>
Ivory Steel	<b>805810603</b>	<b>3,100</b>
White Steel	<b>805810601</b>	<b>3,100</b>

<b>SCARLET TC 9</b>		€
Black Steel	<b>805810610</b>	<b>3,100</b>
Dove gray steel *	<b>805810612</b>	<b>3,100</b>
Ivory Steel	<b>805810613</b>	<b>3,100</b>
White Steel	<b>805810611</b>	<b>3,100</b>

## Specifications and standard fittings:

- this hermetic space-saving stove is very narrow and can be installed with its back flush against the wall
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)  
Provision for upper or rear hot air ducting.

## Optional

Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>
------------------	------------------	------------

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>SCARLET TC 6</b>	<b>SCARLET TC 9</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>90x29x104 - 120</b>	<b>90x29x104 - 120</b>
Nominal Heat Output <b>kW</b>	<b>6.1</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>89</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>10 - 2</b>	<b>5 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>20</b>	<b>20</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.63 - 1.38</b>	<b>0.63 - 2.06</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Scarlet US



## SCARLET TC 6 US

		€
Black Steel	805810620	3,250
Dove gray steel	805810622	3,250
Ivory Steel	805810623	3,250
White Steel	805810621	3,250

## SCARLET TC 9 US

		€
Black Steel	805810630	3,250
Dove gray steel	805810632	3,250
Ivory Steel	805810633	3,250
White Steel *	805810631	3,250

### Specifications and standard fittings:

- this hermetic space-saving stove is very narrow and can be installed with its back flush against the wall
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- suitable for a top flue gas outlet and coaxial air inlet integrated in the stove's shape

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)  
Provision for upper or rear hot air ducting.

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	002340626	135
Coaxial adaptor (external female/female connector) 1 m black	002340621	160
Pro2 Ducting Kit	892010200	190

### Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



Technical features	SCARLET TC 6 US	SCARLET TC 9 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	90x29x104 - 125	90x29x104 - 125
Nominal Heat Output <b>kW</b>	6.1	9
Efficiency %	90	89
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	10 - 2	5 - 2
Fuel hopper capacity <b>kg</b>	20	20
Hourly fuel consumption <b>kg/h</b>	0.63 - 1.38	0.63 - 2.06
Flue gas outlet <b>cm</b>	8	8
Energy Rating	A+	A+

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



MICHELLE 8 US		€
Black Steel	<b>805804082</b>	<b>4,460</b>
Caffellatte Steel *	<b>805804083</b>	<b>4,460</b>
White Steel	<b>805804081</b>	<b>4,460</b>

### Specifications and standard fittings:

- hermetic space-saving stove with **coaxial upper smoke outlet**
- structure in lacquered steel with nickel-plated steel inserts
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- ready to be ducted to distribute hot air to other rooms
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- also designed for a rear flue gas outlet

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	MICHELLE 8 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>89x32x112 - 140</b>
Nominal Heat Output <b>kW</b>	<b>8</b>
Efficiency <b>%</b>	<b>90.4</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>18 - 3</b>
Fuel hopper capacity <b>kg</b>	<b>25</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.66 - 1.79</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



## TWIGGY 10 US

		€
Black Steel	<b>805805780</b>	<b>4,770</b>
Caffellatte Steel *	<b>805805782</b>	<b>4,770</b>
White Steel	<b>805805781</b>	<b>4,770</b>

### Specifications and standard fittings:

- hermetic space-saving stove with **coaxial upper smoke outlet**
- clad with painted steel and glass
- two doors, one design door and one for maintenance
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- ready to be ducted to distribute hot air to other rooms
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- also designed for a rear flue gas outlet

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



### Technical features

### TWIGGY 10 US

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>89x36x113 - 140</b>
Nominal Heat Output <b>kW</b>	<b>10</b>
Efficiency <b>%</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>19 - 4</b>
Fuel hopper capacity <b>kg</b>	<b>25</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.66 - 2.29</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Flo TC



<b>FLO TC 6</b>		€
Black Steel	<b>805809800</b>	<b>2,200</b>
Caffellatte Steel *	<b>805809802</b>	<b>2,200</b>
White Steel	<b>805809801</b>	<b>2,200</b>
<b>FLO TC 9</b>		€
Black Steel	<b>805809820</b>	<b>2,200</b>
Caffellatte Steel	<b>805809822</b>	<b>2,200</b>
White Steel	<b>805809821</b>	<b>2,200</b>

## Specifications and standard fittings:

- pellet stove that can draw its combustion air directly from outdoors
- rounded lacquered steel cladding
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

## Optional

Magnofix fireplace kit - T3 Mini	<b>892010020</b>	<b>155</b>
----------------------------------	------------------	------------

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>FLO TC 6</b>	<b>FLO TC 9</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x49x97 - 90</b>	<b>53x49x97 - 90</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Emily TC



<b>EMILY TC 6</b>		€
Black Steel	<b>805810900</b>	<b>2,860</b>
Dove gray steel	<b>805810903</b>	<b>2,860</b>
Moka Steel	<b>805810901</b>	<b>2,860</b>
White Steel	<b>805810902</b>	<b>2,860</b>

<b>EMILY TC 9</b>		€
Black Steel	<b>805810920</b>	<b>2,860</b>
Dove gray steel	<b>805810923</b>	<b>2,860</b>
Moka Steel	<b>805810921</b>	<b>2,860</b>
White Steel *	<b>805810922</b>	<b>2,860</b>

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- elegant circular shape with painted steel cladding
- double-glazed door
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)

## Optional

Magnofix fireplace kit - T3 Mini	<b>892010020</b>	<b>155</b>
Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>EMILY TC 6</b>	<b>EMILY TC 9</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x53x110 - 99</b>	<b>53x53x110 - 99</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>22</b>	<b>22</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Emily TC US



<b>EMILY TC 6 US</b>		€
Black Steel	<b>805811100</b>	<b>3,060</b>
Dove gray steel	<b>805811103</b>	<b>3,060</b>
Moka Steel	<b>805811101</b>	<b>3,060</b>
White Steel	<b>805811102</b>	<b>3,060</b>

<b>EMILY TC 9 US</b>		€
Black Steel	<b>805811120</b>	<b>3,060</b>
Dove gray steel	<b>805811123</b>	<b>3,060</b>
Moka Steel	<b>805811121</b>	<b>3,060</b>
White Steel *	<b>805811122</b>	<b>3,060</b>

## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- elegant circular shape with painted steel cladding
- double-glazed door
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>
Magnofix fireplace kit - T3 Mini	<b>892010020</b>	<b>155</b>
Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>EMILY TC 6 US</b>	<b>EMILY TC 9 US</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x53x110 - 105</b>	<b>53x53x110 - 105</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>16</b>	<b>16</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Theo TC



<b>THEO TC 6</b>		€
Anthracite Steel	<b>805811200</b>	<b>2,950</b>
Dove gray steel	<b>805811202</b>	<b>2,950</b>
White Steel	<b>805811201</b>	<b>2,950</b>
<b>THEO TC 9</b>		€
Anthracite Steel	<b>805811210</b>	<b>2,950</b>
Dove gray steel	<b>805811212</b>	<b>2,950</b>
White Steel *	<b>805811211</b>	<b>2,950</b>

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- rounded lacquered steel cladding with a cast iron top
- double-glazed door
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)

## Optional

Magnofix fireplace kit - T3 Mini	<b>892010020</b>	<b>155</b>
Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>THEO TC 6</b>	<b>THEO TC 9</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>52x54x110 - 112</b>	<b>52x54x110 - 112</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>22</b>	<b>22</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Theo TC US



<b>THEO TC 6 US</b>		€
Anthracite Steel	<b>805811220</b>	<b>3,150</b>
Dove gray steel	<b>805811222</b>	<b>3,150</b>
White Steel	<b>805811221</b>	<b>3,150</b>
<b>THEO TC 9 US</b>		€
Anthracite Steel *	<b>805811230</b>	<b>3,150</b>
Dove gray steel	<b>805811232</b>	<b>3,150</b>
White Steel	<b>805811231</b>	<b>3,150</b>

## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- rounded lacquered steel cladding with a cast iron top
- double-glazed door
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>
Magnofix fireplace kit - T3 Mini	<b>892010020</b>	<b>155</b>
Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>THEO TC 6 US</b>	<b>THEO TC 9 US</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>52x54x110 - 118</b>	<b>52x54x110 - 118</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>16</b>	<b>16</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Vivi TC



<b>VIVI TC 6</b>		€
Black Steel	<b>805809200</b>	<b>3,320</b>
Dove gray steel	<b>805809203</b>	<b>3,320</b>
Moka Steel	<b>805809201</b>	<b>3,320</b>
White Steel	<b>805809202</b>	<b>3,320</b>

<b>VIVI TC 9</b>		€
Black Steel *	<b>805809220</b>	<b>3,320</b>
Dove gray steel	<b>805809223</b>	<b>3,320</b>
Moka Steel	<b>805809221</b>	<b>3,320</b>
White Steel	<b>805809222</b>	<b>3,320</b>

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- elegant circular shape with painted steel cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- **graphic digital display** with touch controls
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- cast iron burning pot and firebox sides in **Magnofix®**
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)

## Optional

Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>
------------------	------------------	------------

## Complementary accessories starting on page 163

My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>VIVI TC 6</b>	<b>VIVI TC 9</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>52x52x110 - 100</b>	<b>52x52x110 - 100</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>22</b>	<b>22</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



VIVI TC 6 US		€
Black Steel	<b>805809300</b>	<b>3,520</b>
Dove gray steel	<b>805809303</b>	<b>3,520</b>
Moka Steel	<b>805809301</b>	<b>3,520</b>
White Steel	<b>805809302</b>	<b>3,520</b>

VIVI TC 9 US		€
Black Steel	<b>805809320</b>	<b>3,520</b>
Dove gray steel	<b>805809323</b>	<b>3,520</b>
Moka Steel	<b>805809321</b>	<b>3,520</b>
White Steel *	<b>805809322</b>	<b>3,520</b>

### Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- elegant circular shape with painted steel cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- **graphic digital display** with touch controls
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- cast iron burning pot and firebox sides in **Magnofix®**
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Kit Pro 2:** Option to pair with a ventilation kit to channel hot air into other rooms (Ø 8 cm)

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>
Pro2 Ducting Kit	<b>892010200</b>	<b>190</b>

### Complementary accessories starting on page 163

My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	VIVI TC 6 US	VIVI TC 9 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>52x52x110 - 106</b>	<b>52x52x110 - 106</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>9</b>
Efficiency <b>%</b>	<b>90</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>7 - 2</b>	<b>10 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>16</b>	<b>16</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.57 - 1.38</b>	<b>0.57 - 2.11</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



MILU 8		€
Black Steel	<b>805806922</b>	<b>2,100</b>
Red Steel	<b>805806920</b>	<b>2,100</b>
White Steel *	<b>805806921</b>	<b>2,100</b>

### Specifications and standard fittings:

- pellet stove that can draw its combustion air directly from outdoors
- rounded lacquered steel cladding
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	MILU 8
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x46x102 - 93</b>
Nominal Heat Output <b>kW</b>	<b>8.2</b>
Efficiency <b>%</b>	<b>89.5</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>13 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>16</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.56 - 1.95</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



<b>LIA 6</b>		€
Black Steel	<b>805802872</b>	<b>2,100</b>
Ivory Steel	<b>805802871</b>	<b>2,100</b>
<b>LIA 8</b>		€
Black Steel	<b>805802882</b>	<b>2,100</b>
Ivory Steel *	<b>805802881</b>	<b>2,100</b>

### Specifications and standard fittings:

- steel structure with metal cladding
- cast iron top
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system
- combustion air ducted from outdoors

### Optional

Outdoor combustion air connector	<b>892005970</b>	<b>50</b>
----------------------------------	------------------	-----------

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>LIA 6</b>	<b>LIA 8</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x52x110 - 93</b>	<b>53x52x110 - 93</b>
Nominal Heat Output <b>kW</b>	<b>6</b>	<b>8.2</b>
Efficiency <b>%</b>	<b>90</b>	<b>87.7</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>10 - 1</b>	<b>8 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.63 - 1.36</b>	<b>0.63 - 1.92</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



<b>MELITA 8</b>		<b>€</b>
Black Steel	<b>805806481</b>	<b>2,830</b>
Burgundy Steel	<b>805806484</b>	<b>2,830</b>
Caffelatte Steel	<b>805806483</b>	<b>2,830</b>
Light Gray Steel	<b>805806482</b>	<b>2,830</b>
White Steel *	<b>805806480</b>	<b>2,830</b>

### Specifications and standard fittings:

- steel structure with metal cladding
- two doors, one design door and one for maintenance
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system
- combustion air ducted from outdoors

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>MELITA 8</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x58x119 - 112</b>
Nominal Heat Output <b>kW</b>	<b>8.2</b>
Efficiency <b>%</b>	<b>87.7</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>8 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.63 - 1.92</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



NINA 8		€
Black Steel	<b>805803271</b>	<b>2,760</b>
Burgundy Steel	<b>805803916</b>	<b>2,760</b>
Caffelatte Steel	<b>805803915</b>	<b>2,760</b>
Light Gray Steel	<b>805803272</b>	<b>2,760</b>
White Steel *	<b>805803270</b>	<b>2,760</b>

### Specifications and standard fittings:

- steel structure with metal cladding
- two doors, one design door and one for maintenance
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- top hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system
- combustion air ducted from outdoors

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	NINA 8
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>53x59x119 - 112</b>
Nominal Heat Output <b>kW</b>	<b>8.2</b>
Efficiency <b>%</b>	<b>87.7</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>8 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.63 - 1.92</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Marianne US



## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- rounded shape with glass door and cast iron top
- steel structure clad with metal (or soapstone) with nickel-plated profiles
- two doors: one design door with mirror steel firebox surround and one technical door
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- designed for our **Universal Gateway**
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- suitable for a top flue gas outlet and coaxial air inlet integrated in the stove's shape
- combustion air ducted from outdoors

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 6 cm)

<b>MARIANNE 6 US</b>		€
Black Steel	<b>805804211</b>	<b>4,410</b>
Moka Steel	<b>805804213</b>	<b>4,410</b>
Red Steel	<b>805804210</b>	<b>4,410</b>
Soapstone	<b>805804230</b>	<b>5,410</b>
White Steel	<b>805804215</b>	<b>4,410</b>

<b>MARIANNE 9 US</b>		€
Black Steel	<b>805804201</b>	<b>4,480</b>
Moka Steel	<b>805804203</b>	<b>4,480</b>
Red Steel	<b>805804200</b>	<b>4,480</b>
Soapstone *	<b>805804220</b>	<b>5,410</b>
White Steel	<b>805804205</b>	<b>4,480</b>

<b>MARIANNE 9 US PRO 2</b>		€
Black Steel	<b>805806951</b>	<b>4,700</b>
Moka Steel	<b>805806953</b>	<b>4,700</b>
Red Steel	<b>805806950</b>	<b>4,700</b>
Soapstone	<b>805806960</b>	<b>5,630</b>
White Steel	<b>805806954</b>	<b>4,700</b>

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>MARIANNE 6 US</b>	<b>MARIANNE 9 US</b>	<b>MARIANNE 9 US PRO 2</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>56x56x113 - 116</b>	<b>56x56x113 - 116</b>	<b>56x56x113 - 116</b>
Nominal Heat Output <b>kW</b>	<b>6.1</b>	<b>9.1</b>	<b>9.1</b>
Efficiency <b>%</b>	<b>93</b>	<b>92</b>	<b>92</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>14 - 1</b>	<b>16 - 1</b>	<b>16 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>19</b>	<b>19</b>	<b>19</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.48 - 1.33</b>	<b>0.48 - 2.02</b>	<b>0.48 - 2.02</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



Firebox versions		€
ANNA 12 *	<b>805803010</b>	<b>3,300</b>
ANNA 12 Pro 3	<b>805803000</b>	<b>3,640</b>

Cladding		
Beige Ceramic	<b>894435041</b>	<b>855</b>
Caffelatte Ceramic	<b>894435042</b>	<b>855</b>
Cream Ceramic	<b>894435043</b>	<b>855</b>
Black Ceramic	<b>894435134</b>	<b>855</b>
Burgundy Ceramic *	<b>894435040</b>	<b>855</b>

### Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- steel structure with ceramic cladding
- double-glazed door
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	ANNA 12
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>61x54x119 - 190</b>
Nominal Heat Output <b>kW</b>	<b>12</b>
Efficiency <b>%</b>	<b>88.5</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>11.3 - 2.6</b>
Fuel hopper capacity <b>kg</b>	<b>22</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.83 - 2.79</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



## Firebox versions

		€
ANNA 12 US *	<b>805804330</b>	<b>3,620</b>

## Cladding

Beige Ceramic *	<b>894435141</b>	<b>885</b>
Caffelatte Ceramic	<b>894435142</b>	<b>885</b>
Cream Ceramic	<b>894435143</b>	<b>885</b>
Black Ceramic	<b>894435144</b>	<b>885</b>
Burgundy Ceramic	<b>894435140</b>	<b>885</b>

## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- steel structure with ceramic cladding
- double-glazed door
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



## Technical features

### ANNA 12 US

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>61x54x119 - 190</b>
Nominal Heat Output <b>kW</b>	<b>12</b>
Efficiency <b>%</b>	<b>88.5</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>11.3 - 2.6</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.83 - 2.79</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Bianca Lux



## Specifications and standard fittings:

- pellet stove that can draw its combustion air directly from outdoors
- steel structure with metal cladding
- glass door and upper front panel
- ceramic glass (800°) featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas heat exchanger
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

<b>BIANCA LUX 9</b>		€
Black Steel	<b>805804562</b>	<b>3,130</b>
Red Steel	<b>805804560</b>	<b>3,130</b>
White Steel	<b>805804561</b>	<b>3,130</b>

<b>BIANCA LUX 9 Pro 2</b>		€
Black Steel	<b>805804572</b>	<b>3,350</b>
Red Steel	<b>805804570</b>	<b>3,350</b>
White Steel	<b>805804571</b>	<b>3,350</b>

<b>BIANCA LUX 12</b>		€
Black Steel	<b>805804172</b>	<b>3,200</b>
Red Steel	<b>805804170</b>	<b>3,200</b>
White Steel *	<b>805804171</b>	<b>3,200</b>

<b>BIANCA LUX 12 Pro 3</b>		€
Black Steel	<b>805804182</b>	<b>3,540</b>
Red Steel	<b>805804180</b>	<b>3,540</b>
White Steel	<b>805804181</b>	<b>3,540</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>BIANCA LUX 9</b>	<b>BIANCA LUX 12</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>56x55x120 - 183</b>	<b>56x55x120 - 183</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>12</b>
Efficiency <b>%</b>	<b>90.5</b>	<b>88</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>8.1 - 1.9</b>	<b>12 - 3</b>
Fuel hopper capacity <b>kg</b>	<b>22</b>	<b>22</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.83 - 2.05</b>	<b>0.83 - 2.79</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



<b>CLELIA 13</b>		€
Black Steel	<b>805806990</b>	<b>3,220</b>
Moka Steel	<b>805806991</b>	<b>3,220</b>
Red Steel *	<b>805806993</b>	<b>3,220</b>
White Steel	<b>805806992</b>	<b>3,220</b>
<b>CLELIA 13 Pro 3</b>		€
Black Steel	<b>805807000</b>	<b>3,560</b>
Moka Steel	<b>805807001</b>	<b>3,560</b>
Red Steel	<b>805807003</b>	<b>3,560</b>
White Steel	<b>805807002</b>	<b>3,560</b>

### Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- rounded lacquered steel cladding
- ceramic glass featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>CLELIA 13</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>59x52x122 - 150</b>
Nominal Heat Output <b>kW</b>	<b>13.2</b>
Efficiency <b>%</b>	<b>90.1</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>15 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.73 - 3.04</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



<b>CLELIA 12 US</b>		€
Black Steel *	<b>805807340</b>	<b>3,540</b>
Moka Steel	<b>805807341</b>	<b>3,540</b>
<b>CLELIA 12 US Pro 2</b>		€
Moka Steel	<b>805807351</b>	<b>3,760</b>

### Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- rounded lacquered steel cladding
- ceramic glass featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>CLELIA 12 US</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>59x60x122 - 160</b>
Nominal Heat Output <b>kW</b>	<b>12</b>
Efficiency <b>%</b>	<b>90.4</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>12 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.73 - 2.76</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Clelia TC



## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- rounded lacquered steel cladding
- ceramic glass featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

<b>CLELIA TC 9</b>		€
Black Steel	<b>805807200</b>	<b>3,860</b>
Moka Steel	<b>805807201</b>	<b>3,860</b>
Red Steel	<b>805807203</b>	<b>3,860</b>
White Steel	<b>805807202</b>	<b>3,860</b>

<b>CLELIA TC 9 Pro 2</b>		€
Black Steel	<b>805807210</b>	<b>4,080</b>
Moka Steel	<b>805807211</b>	<b>4,080</b>
Red Steel	<b>805807213</b>	<b>4,080</b>
White Steel	<b>805807212</b>	<b>4,080</b>

<b>CLELIA TC 13</b>		€
Black Steel	<b>805807010</b>	<b>3,860</b>
Moka Steel *	<b>805807011</b>	<b>3,860</b>
Red Steel	<b>805807013</b>	<b>3,860</b>
White Steel	<b>805807012</b>	<b>3,860</b>

<b>CLELIA TC 13 Pro 3</b>		€
Black Steel	<b>805807020</b>	<b>4,200</b>
Moka Steel	<b>805807021</b>	<b>4,200</b>
Red Steel	<b>805807023</b>	<b>4,200</b>
White Steel	<b>805807022</b>	<b>4,200</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>CLELIA TC 9</b>	<b>CLELIA TC 13</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>59x52x122 - 150</b>	<b>59x52x122 - 150</b>
Nominal Heat Output <b>kW</b>	<b>9.3</b>	<b>13</b>
Efficiency <b>%</b>	<b>91.8</b>	<b>90.5</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>9 - 1</b>	<b>13 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.64 - 2.11</b>	<b>0.64 - 2.99</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Clelia TC US



## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- rounded lacquered steel cladding
- ceramic glass featuring our air wash system
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2**: two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

<b>CLELIA TC 9 US</b>		€
Black Steel	<b>805807360</b>	<b>4,180</b>
Moka Steel	<b>805807361</b>	<b>4,180</b>
Red Steel	<b>805807363</b>	<b>4,180</b>
White Steel	<b>805807362</b>	<b>4,180</b>

<b>CLELIA TC 9 US Pro 2</b>		€
Black Steel	<b>805807370</b>	<b>4,400</b>
Moka Steel	<b>805807371</b>	<b>4,400</b>
Red Steel	<b>805807373</b>	<b>4,400</b>
White Steel	<b>805807372</b>	<b>4,400</b>

<b>CLELIA TC 12 US</b>		€
Black Steel	<b>805807380</b>	<b>4,180</b>
Moka Steel	<b>805807381</b>	<b>4,180</b>
Red Steel	<b>805807383</b>	<b>4,180</b>
White Steel *	<b>805807382</b>	<b>4,180</b>

<b>CLELIA TC 12 US Pro 2</b>		€
Black Steel	<b>805807390</b>	<b>4,400</b>
Moka Steel	<b>805807391</b>	<b>4,400</b>
Red Steel	<b>805807393</b>	<b>4,400</b>
White Steel	<b>805807392</b>	<b>4,400</b>

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	CLELIA TC 9 US	CLELIA TC 12 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>59x60x122 - 160</b>	<b>59x60x122 - 160</b>
Nominal Heat Output <b>kW</b>	<b>9.3</b>	<b>12</b>
Efficiency <b>%</b>	<b>91.8</b>	<b>90.9</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>9 - 1</b>	<b>12 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.64 - 2.11</b>	<b>0.64 - 2.75</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



Firebox versions		€
LILIBET 9	<b>805808540</b>	<b>3,040</b>
LILIBET 9 Pro2	<b>805808550</b>	<b>3,260</b>
LILIBET 13 *	<b>805808560</b>	<b>3,040</b>
LILIBET 13 Pro3	<b>805808570</b>	<b>3,380</b>

Cladding		
Matt White Ceramic *	<b>894435211</b>	<b>750</b>
Caffelatte Ceramic	<b>894435210</b>	<b>750</b>
Black Ceramic	<b>894435212</b>	<b>750</b>

### Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- elegant circular shape with ceramic cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	LILIBET 9	LILIBET 13
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>64x58x122 - 195</b>	<b>64x58x122 - 195</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>13.2</b>
Efficiency <b>%</b>	<b>91.2</b>	<b>90.1</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>5 - 1</b>	<b>15 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.73 - 2.05</b>	<b>0.73 - 3.04</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



### Firebox versions

		€
LILIBET 9 US	<b>805809100</b>	<b>3,360</b>
LILIBET 12 US *	<b>805809120</b>	<b>3,360</b>
LILIBET 12 US Pro2	<b>805809130</b>	<b>3,580</b>

### Cladding

Matt White Ceramic *	<b>894435211</b>	<b>750</b>
Caffelatte Ceramic	<b>894435210</b>	<b>750</b>
Black Ceramic	<b>894435212</b>	<b>750</b>

### Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- elegant circular shape with ceramic cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	LILIBET 9 US	LILIBET 12 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>65x66x122 - 195</b>	<b>65x66x122 - 195</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>12</b>
Efficiency <b>%</b>	<b>91.2</b>	<b>90.4</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>5 - 1</b>	<b>12 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.73 - 2.05</b>	<b>0.73 - 2.76</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Lilibet TC



Firebox versions		€
LILIBET TC 9	805808500	3,670
LILIBET TC 9 Pro2 *	805808510	3,890
LILIBET TC 13	805808520	3,670
LILIBET TC 13 Pro3	805808530	4,010

Cladding		
Matt White Ceramic	894435211	750
Caffelatte Ceramic *	894435210	750
Black Ceramic	894435212	750

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- elegant circular shape with ceramic cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

## Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



Technical features	LILIBET TC 9	LILIBET TC 13
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>64x58x122 - 195</b>	<b>64x58x122 - 195</b>
Nominal Heat Output <b>kW</b>	<b>9.3</b>	<b>13</b>
Efficiency <b>%</b>	<b>91.8</b>	<b>90.5</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>9 - 1</b>	<b>13 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.64 - 2.11</b>	<b>0.64 - 2.99</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



## Firebox versions

		€
LILIBET TC 9 US	805809140	3,990
LILIBET TC 9 US Pro2	805809150	4,210
LILIBET TC 12 US *	805809160	3,990
LILIBET TC 12 US Pro2	805809170	4,210

## Cladding

Matt White Ceramic *	894435211	750
Caffelatte Ceramic	894435210	750
Black Ceramic	894435212	750

## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- elegant circular shape with ceramic cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2**: two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	002340626	135
Coaxial adaptor (external female/female connector) 1 m black	002340621	160

## Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



Technical features	LILIBET TC 9 US	LILIBET TC 12 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	65x66x122 - 195	65x66x122 - 195
Nominal Heat Output <b>kW</b>	9.3	12
Efficiency <b>%</b>	91.8	90.9
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	9 - 1	12 - 2
Fuel hopper capacity <b>kg</b>	15	15
Hourly fuel consumption <b>kg/h</b>	0.64 - 2.11	0.64 - 2.75
Flue gas outlet <b>cm</b>	8	8
Energy Rating	A++	A+

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Nadine



Firebox versions		€
NADINE 9	<b>805808420</b>	<b>3,210</b>
NADINE 9 Pro 2	<b>805808430</b>	<b>3,430</b>
NADINE 13 *	<b>805808440</b>	<b>3,210</b>
NADINE 13 Pro3	<b>805808450</b>	<b>3,550</b>

Cladding		
Matt White Ceramic	<b>894435201</b>	<b>880</b>
Caffelatte Ceramic *	<b>894435200</b>	<b>880</b>
Burgundy Ceramic	<b>894435203</b>	<b>880</b>

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- steel structure with ceramic cladding
- two doors, one design door and one for maintenance
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	NADINE 9	NADINE 13
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>62x59x125 - 190</b>	<b>62x59x125 - 190</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>13.2</b>
Efficiency <b>%</b>	<b>91.2</b>	<b>90.1</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>5 - 1</b>	<b>15 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.73 - 2.05</b>	<b>0.73 - 3.04</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Nadine TC



Firebox versions		€
NADINE TC 9	805808460	3,850
NADINE TC 9 Pro 2	805808470	4,070
NADINE TC 13 *	805808480	3,850
NADINE TC 13 Pro3	805808490	4,190

Cladding		
Matt White Ceramic *	894435201	880
Caffelatte Ceramic	894435200	880
Burgundy Ceramic	894435203	880

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- steel structure with ceramic cladding
- two doors, one design door and one for maintenance
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2**: two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3**: three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

## Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



Technical features	NADINE TC 9	NADINE TC 13
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	62x59x125 - 190	62x59x125 - 190
Nominal Heat Output <b>kW</b>	9.3	13
Efficiency %	91.8	90.5
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	9 - 1	13 - 2
Fuel hopper capacity <b>kg</b>	18	18
Hourly fuel consumption <b>kg/h</b>	0.64 - 2.11	0.64 - 2.99
Flue gas outlet <b>cm</b>	8	8
Energy Rating	A++	A+

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Nadine US



Firebox versions		€
NADINE 9 US	<b>805809000</b>	<b>3,530</b>
NADINE 9 US Pro2	<b>805809010</b>	<b>3,750</b>
NADINE 12 US	<b>805809020</b>	<b>3,530</b>
NADINE 12 US Pro2 *	<b>805809030</b>	<b>3,750</b>

Cladding		
Matt White Ceramic *	<b>894435201</b>	<b>880</b>
Caffelatte Ceramic	<b>894435200</b>	<b>880</b>
Burgundy Ceramic	<b>894435203</b>	<b>880</b>

## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- steel structure with ceramic cladding
- two doors, one design door and one for maintenance
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- high performance cast iron brazier
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	NADINE 9 US	NADINE 12 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>62x68x125 - 190</b>	<b>62x68x125 - 190</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>12</b>
Efficiency <b>%</b>	<b>91.2</b>	<b>90.4</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>5 - 1</b>	<b>12 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.73 - 2.05</b>	<b>0.73 - 2.76</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Nadine TC US



Firebox versions		€
NADINE TC 9 US	<b>805809040</b>	<b>4,170</b>
NADINE TC 9 US Pro2	<b>805809050</b>	<b>4,390</b>
NADINE TC 12 US *	<b>805809060</b>	<b>4,170</b>
NADINE TC 12 US Pro2	<b>805809070</b>	<b>4,390</b>

Cladding		
Matt White Ceramic *	<b>894435201</b>	<b>880</b>
Caffelatte Ceramic	<b>894435200</b>	<b>880</b>
Burgundy Ceramic	<b>894435203</b>	<b>880</b>

## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- steel structure with ceramic cladding
- two doors, one design door and one for maintenance
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	NADINE TC 9 US	NADINE TC 12 US
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>62x68x125 - 190</b>	<b>62x68x125 - 190</b>
Nominal Heat Output <b>kW</b>	<b>9.3</b>	<b>12</b>
Efficiency <b>%</b>	<b>91.8</b>	<b>90.9</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>9 - 1</b>	<b>12 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.64 - 2.11</b>	<b>0.64 - 2.75</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Vivienne TC



<b>VIVIENNE TC 9</b>		€
Black Steel	<b>805806700</b>	<b>4,230</b>
Moka Steel	<b>805806701</b>	<b>4,230</b>
White Steel	<b>805806702</b>	<b>4,230</b>

<b>VIVIENNE TC 9 Pro 2</b>		€
Black Steel	<b>805806710</b>	<b>4,450</b>
Moka Steel	<b>805806711</b>	<b>4,450</b>
White Steel	<b>805806712</b>	<b>4,450</b>

<b>VIVIENNE TC 13</b>		€
Black Steel	<b>805806720</b>	<b>4,230</b>
Moka Steel	<b>805806721</b>	<b>4,230</b>
White Steel *	<b>805806722</b>	<b>4,230</b>

<b>VIVIENNE TC 13 Pro 3</b>		€
Black Steel	<b>805806730</b>	<b>4,570</b>
Moka Steel	<b>805806731</b>	<b>4,570</b>
White Steel	<b>805806732</b>	<b>4,570</b>

#### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>

#### Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- elegant circular shape with painted steel cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)



<b>Technical features</b>	<b>VIVIENNE TC 9</b>	<b>VIVIENNE TC 13</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>58x58x122 - 155</b>	<b>58x58x122 - 155</b>
Nominal Heat Output <b>kW</b>	<b>9.3</b>	<b>13</b>
Efficiency <b>%</b>	<b>91.8</b>	<b>90.5</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>9 - 1</b>	<b>13 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>18</b>	<b>18</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.64 - 2.11</b>	<b>0.64 - 2.99</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Vivienne TC US



## Specifications and standard fittings:

- **sealed stove** designed with a **top coaxial flue gas outlet**
- elegant circular shape with painted steel cladding
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- **Balanced Door** with self-balancing system
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- T3 technology with 4 smoke pipes of increased diameter with high efficiency and simplified cleaning
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive brazier self-cleaning system
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2**: two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

<b>VIVIENNE TC 9 US</b>		€
Black Steel	<b>805806850</b>	<b>4,550</b>
Moka Steel	<b>805806851</b>	<b>4,550</b>
White Steel	<b>805806852</b>	<b>4,550</b>

<b>VIVIENNE TC 9 US Pro 2</b>		€
Black Steel	<b>805806860</b>	<b>4,770</b>
Moka Steel	<b>805806861</b>	<b>4,770</b>
White Steel	<b>805806862</b>	<b>4,770</b>

<b>VIVIENNE TC 12 US</b>		€
Black Steel *	<b>805806870</b>	<b>4,550</b>
Moka Steel	<b>805806871</b>	<b>4,550</b>
White Steel	<b>805806872</b>	<b>4,550</b>

<b>VIVIENNE TC 12 US Pro 2</b>		€
Black Steel	<b>805806880</b>	<b>4,770</b>
Moka Steel	<b>805806881</b>	<b>4,770</b>
White Steel	<b>805806882</b>	<b>4,770</b>

### Optional

Coaxial adaptor (external female/female connector) 0,5 m black	<b>002340626</b>	<b>135</b>
Coaxial adaptor (external female/female connector) 1 m black	<b>002340621</b>	<b>160</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



<b>Technical features</b>	<b>VIVIENNE TC 9 US</b>	<b>VIVIENNE TC 12 US</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>58x66x122 - 165</b>	<b>58x66x122 - 165</b>
Nominal Heat Output <b>kW</b>	<b>9.3</b>	<b>12</b>
Efficiency <b>%</b>	<b>91.8</b>	<b>90.9</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>9 - 1</b>	<b>12 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>15</b>	<b>15</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.64 - 2.11</b>	<b>0.64 - 2.75</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Giorgia



## Specifications and standard fittings:

- air pellet stove
- rounded lacquered steel cladding with a cast iron top
- large ceramic glass door for a fascinating view of the fire
- **Balanced Door** with self-balancing system
- front hot air outlet
- variable-speed fan with **Zero Speed Fan** technology (the fan can be switched off to increase acoustic comfort and favour natural heat diffusion)
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- designed for our **Universal Gateway**
- high-efficiency flue gas tube heat exchanger with tapered combustion chamber
- burn pot in cast iron
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system

**Pro 2:** two independent fans; one for the room and one for the rear ducting (Ø 8 cm)

**Pro 3:** three independent fans; one for the room and two for the rear ducting (Ø 8 cm)

<b>GIORGIA 9</b>		€
Black Steel	<b>805805871</b>	<b>3,110</b>
Red Steel *	<b>805805870</b>	<b>3,110</b>
White Steel	<b>805805872</b>	<b>3,110</b>
<b>GIORGIA 9 Pro 2</b>		€
Black Steel	<b>805805862</b>	<b>3,330</b>
Red Steel	<b>805805860</b>	<b>3,330</b>
White Steel	<b>805805861</b>	<b>3,330</b>
<b>GIORGIA 12</b>		€
Black Steel	<b>805805882</b>	<b>3,180</b>
Red Steel	<b>805805880</b>	<b>3,180</b>
White Steel	<b>805805881</b>	<b>3,180</b>
<b>GIORGIA 12 Pro 3</b>		€
Black Steel	<b>805805892</b>	<b>3,520</b>
Red Steel	<b>805805890</b>	<b>3,520</b>
White Steel	<b>805805891</b>	<b>3,520</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	GIORGIA 9	GIORGIA 12
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>58x59x122 - 180</b>	<b>58x59x122 - 180</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>12.2</b>
Efficiency <b>%</b>	<b>91.4</b>	<b>90.7</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>9.3 - 1.2</b>	<b>10.5 - 1.1</b>
Fuel hopper capacity <b>kg</b>	<b>24</b>	<b>24</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.77 - 2</b>	<b>0.77 - 2.76</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



Ecofire® Nadine



Ecofire® Dadò TC

**Dadò TC** p.54  
**Jackie Idro TC** p.56  
**Jackie Idro TC**  
**Ventilated** p.58  
**Martina Idro Lux** p.60

**Mirella Idro** p.62  
**Tiffany Idro TC** p.50  
**Tiffany Idro TC US** p.52

# Ecofire® idro stoves

Our range of hydronic  
 and fan-assisted pellet stoves

# Tiffany Idro TC



TIFFANY IDRO V13 TC		€
Black Steel	805715430	4,830
Caffelatte Steel	805715432	4,830
White Steel *	805715431	4,830
TIFFANY IDRO V21 TC		€
Black Steel	805715440	4,830
Caffelatte Steel	805715442	4,830
White Steel	805715441	4,830

## Specifications and standard fittings:

- hermetic space-saving stove with, **hydro ventilated**
- painted steel cladding. The right side in glossy black and the left side available in various colors.
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- ceramic glass door with air wash system
- **Balanced Door** with self-balancing system
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- digital display to manage settings and operating parameters
- digital programmer to set operating hours
- designed for our **Universal Gateway**
- burn pot in cast iron
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive self-cleaning system for both the brazier and the exchange pipes
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)

## Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



## Product Details



**Space saving**



**Hydronic unit**



**Heating by water or air**



**Self Cleaning System**



**Complete Burning System**

Ideal for passageways, corridors, corners and narrow rooms. A few centimeters deep and flush with the wall.

Integrated in the product to simplify installation.

Heats the water for the system and spreads hot air into the environment through a fan.

Self-cleaning system for the brazier and exchanger tubes.


Continuous burning of combustion residues: lower consumption; greater yield; less frequent cleaning.

# Tiffany Idro TC

Technical features	Min	Max 13	Max 21
Nominal Heat Output <b>kW</b>	4.2	<b>13</b>	<b>20.5</b>
Water Heat Output <b>kW</b>	3.6	<b>12</b>	<b>19</b>
Efficiency %	95	<b>95</b>	<b>94</b>
Temperatura fumi °C	55.8	<b>109</b>	<b>149</b>
Massa fumi <b>g/s</b>	5.1	<b>8.3</b>	<b>10.8</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	287	<b>100</b>	
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	18	<b>9</b>	<b>11</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	9	<b>1</b>	<b>2</b>
Hourly fuel consumption <b>kg/h</b>	0.91	<b>2.82</b>	<b>4.51</b>
Fuel hopper capacity <b>kg</b>		<b>30</b>	
Flue gas outlet <b>cm</b>		<b>8</b>	
Tiraggio canna fumaria <b>Pa</b>		<b>12(±2)</b>	
Tiraggio minimo per dimensionamento camino <b>Pa</b>		<b>0</b>	
Energy Rating	-	<b>A++</b>	<b>A++</b>


## Safety distances (cm)

- X1 = 80**
- X2 = 10**
- Y1 = 20**
- Y2 = 20**
- Z = 75**

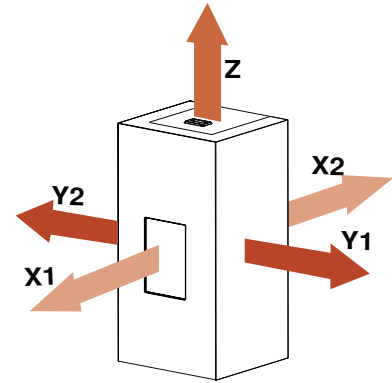


## Dimensions WxDxH cm - Weight kg

**101x36x116 - 244**

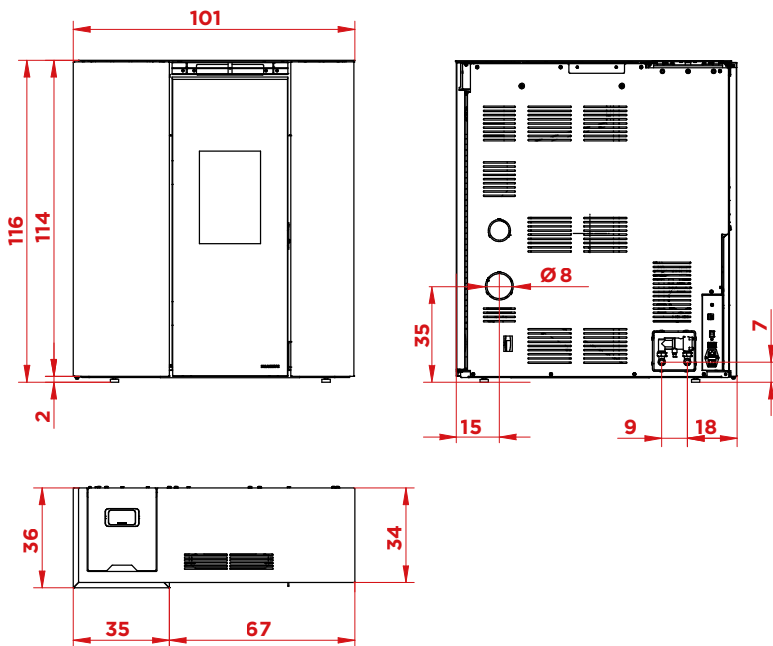

## Packaging (cm)

- B = 120**
- T = 80**
- H = 140**
- Weight = 255 Kg**



# Tiffany Idro TC US



TIFFANY IDRO V13 TC US		€
Black Steel	805715450	5,150
Caffelatte Steel	805715452	5,150
White Steel	805715451	5,150
TIFFANY IDRO V21 TC US		€
Black Steel	805715460	5,150
Caffelatte Steel *	805715462	5,150
White Steel	805715461	5,150

## Specifications and standard fittings:

- hermetic space-saving stove with, **hydro ventilated**
- clad with painted steel and glass
- double-glazed door; the outer **glass is tempered** and black and it becomes transparent when the fire is lit
- ceramic glass door with air wash system
- **Balanced Door** with self-balancing system
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- digital display to manage settings and operating parameters
- digital programmer to set operating hours
- designed for our **Universal Gateway**
- burn pot in cast iron
- **Complete Burning System**: total combustion stove with minimum ash production
- **Self Cleaning System**: exclusive self-cleaning system for both the brazier and the exchange pipes
- large ash drawer and **Speedy Clean** system
- **Quick Start** system (reduces ignition time)
- suitable for a top flue gas outlet and coaxial air inlet integrated in the stove's shape

## Optional

Coaxial adaptor (external female/female connector) 0,5 m black	002340626	135
Coaxial adaptor (external female/female connector) 1 m black	002340621	160

## Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



## Product Details



**Space saving**

Ideal for passageways, corridors, corners and narrow rooms. A few centimeters deep and flush with the wall.



**Hydronic unit**

Integrated in the product to simplify installation.



**Heating by water or air**

Heats the water for the system and spreads hot air into the environment through a fan.




**Self Cleaning System**

Self-cleaning system for the brazier and exchanger tubes.



**Complete Burning System**

Continuous burning of combustion residues: lower consumption; greater yield; less frequent cleaning.



**Coaxial flue gas outlet**


Single coaxial duct for the smoke outlet and combustion air intake. Improves yield and reduces consumption.

# Tiffany Idro TC US

Technical features	Min	Max 13	Max 21
Nominal Heat Output <b>kW</b>	4.2	<b>13</b>	<b>20.5</b>
Water Heat Output <b>kW</b>	3.6	<b>12</b>	<b>19</b>
Efficiency %	95	<b>95</b>	<b>94</b>
Temperatura fumi °C	55.8	<b>109</b>	<b>149</b>
Massa fumi <b>g/s</b>	5.1	<b>8.3</b>	<b>10.8</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	287	<b>100</b>	
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	18	<b>9</b>	<b>11</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	9	<b>1</b>	<b>2</b>
Hourly fuel consumption <b>kg/h</b>	0.91	<b>2.82</b>	<b>4.51</b>
Fuel hopper capacity <b>kg</b>		<b>30</b>	
Flue gas outlet <b>cm</b>		<b>8</b>	
Tiraggio canna fumaria <b>Pa</b>		<b>12(±2)</b>	
Tiraggio minimo per dimensionamento camino <b>Pa</b>		<b>0</b>	
Energy Rating	-	<b>A++</b>	<b>A++</b>


## Safety distances (cm)

**X1 = 80**  
**X2 = 10**  
**Y1 = 20**  
**Y2 = 20**  
**Z = 75**

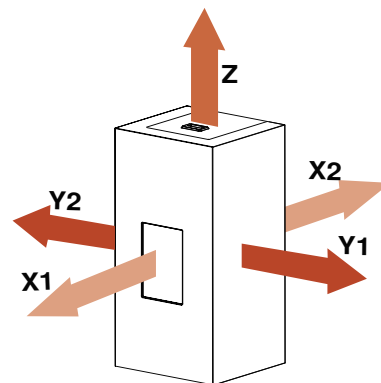


## Dimensions WxDxH cm - Weight kg

**101x36x116 - 248**

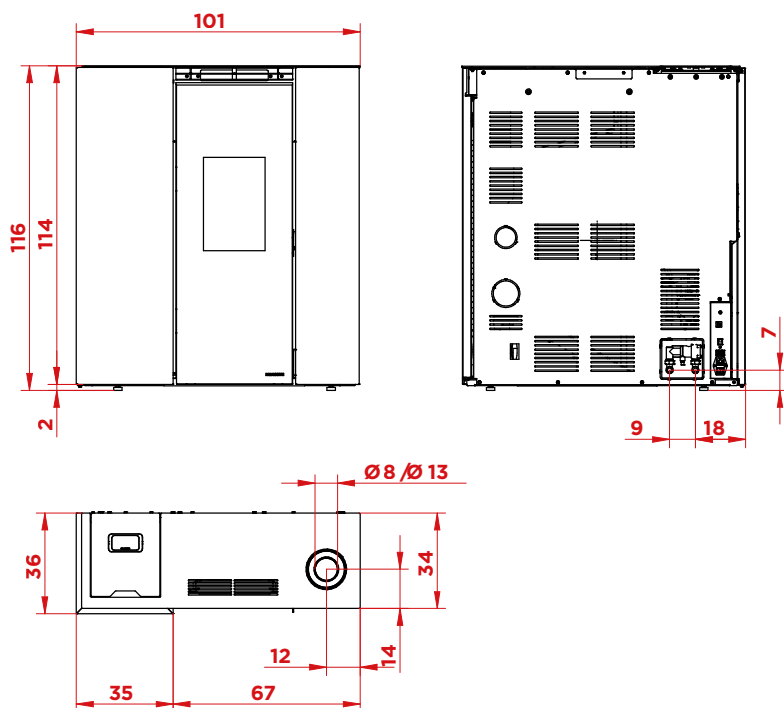

## Packaging (cm)

**B = 120**  
**T = 80**  
**H = 140**  
**Weight = 260 Kg**



# Dadò TC



<b>Dadò 10 TC</b>		€
Black Steel	<b>805715321</b>	<b>5,880</b>
White Steel *	<b>805715322</b>	<b>5,880</b>
<b>Dadò 15 TC</b>		€
Black Steel	<b>805715331</b>	<b>5,880</b>
White Steel	<b>805715332</b>	<b>5,880</b>
<b>Dadò 20 TC</b>		€
Black Steel	<b>805715341</b>	<b>5,880</b>
White Steel	<b>805715342</b>	<b>5,880</b>
<b>Dadò 26 TC</b>		€
Black Steel	<b>805715351</b>	<b>5,880</b>
White Steel	<b>805715352</b>	<b>5,880</b>
<b>Dadò 26 TC DHW</b>		€
Black Steel	<b>805715361</b>	<b>6,160</b>
White Steel	<b>805715362</b>	<b>6,160</b>

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- painted steel cladding. The right side in glossy black and the left side available in various colors.
- double door, an aesthetic one made completely by glass and a technical one with **Balanced door** system
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- integrated interface with external thermostat or for connection to the storage tank
- designed for our **Universal Gateway**
- **Complete Burning System**: total combustion stove with minimum ash production
- **Combustion Dynamic Control** preserves the fuel and combustion air balance, ensuring utmost heat efficiency in all operating conditions
- **Self Cleaning System**: exclusive self-cleaning system for both the brazier and the exchange pipes
- great autonomy thanks to the 45 kg tank (3 bags of pellets)
- **Star Valve** pellet-feed system

DHW: version with a hydronic kit to produce domestic hot water

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



## Product Details



**Star valve feed system**

Pellet feed system that is very accurate in dosing the quantity of fuel burnt.



**Hydronic unit**

Integrated in the product to simplify installation.



**Sealed**

Hermetic sealing ensures greater safety and greater installation opportunities.



**Self Cleaning System**

Self-cleaning system for the brazier and exchanger tubes.



**Complete Burning System**


Continuous burning of combustion residues: lower consumption; greater yield; less frequent cleaning.

# Dadò TC

Technical features	Min	Max 10	Max 15	Max 20	Max 26
Nominal Heat Output <b>kW</b>	4.6	<b>10.3</b>	<b>15</b>	<b>20</b>	<b>26</b>
Water Heat Output <b>kW</b>	3.9	<b>9.5</b>	<b>14.1</b>	<b>18.9</b>	<b>24.6</b>
Efficiency %	96	<b>96</b>		<b>94</b>	
Temperatura fumi <b>°C</b>	59.3	<b>93</b>	<b>115</b>	<b>137</b>	<b>165</b>
Massa fumi <b>g/s</b>	4.6	<b>7.1</b>	<b>9.4</b>	<b>11.3</b>	<b>13.2</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	276			<b>100</b>	
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	4	<b>5</b>		<b>15</b>	
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	6			<b>2</b>	
Hourly fuel consumption <b>kg/h</b>	1	<b>2.23</b>	<b>3.27</b>	<b>4.39</b>	<b>5.75</b>
Fuel hopper capacity <b>kg</b>				<b>45</b>	
Flue gas outlet <b>cm</b>				<b>8</b>	
Tiraggio canna fumaria <b>Pa</b>				<b>12(±2)</b>	
Tiraggio minimo per dimensionamento camino <b>Pa</b>				<b>0</b>	
Energy Rating	-	<b>A++</b>	<b>A++</b>	<b>A++</b>	<b>A++</b>


## Safety distances (cm)

**X1 = 80**  
**X2 = 10**  
**Y1 = 20**  
**Y2 = 20**  
**Z = 75**

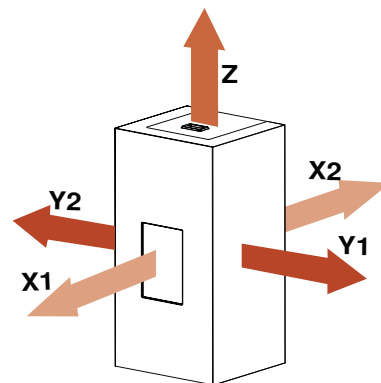

## Dimensions WxDxH cm - Weight kg

**62x62x134 - 225**

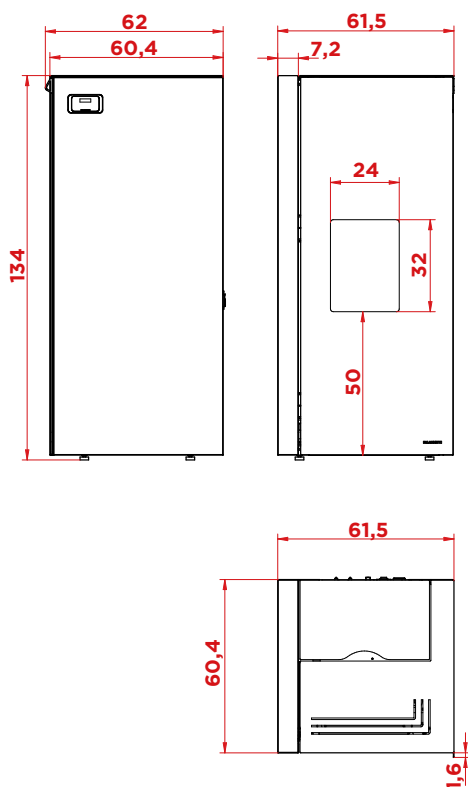

## Packaging (cm)

**B = 85**  
**T = 77**  
**H = 163**  
**Weight = 242 Kg**



# Jackie Hydro TC



JACKIE IDRO 9N TC		€
Black Steel	<b>805714182</b>	<b>5,600</b>
Moka Steel	<b>805714183</b>	<b>5,600</b>
Red Steel	<b>805714180</b>	<b>5,600</b>
White Steel	<b>805714181</b>	<b>5,600</b>

JACKIE IDRO 14N TC		€
Black Steel	<b>805714192</b>	<b>5,600</b>
Moka Steel	<b>805714193</b>	<b>5,600</b>
Red Steel	<b>805714190</b>	<b>5,600</b>
White Steel *	<b>805714191</b>	<b>5,600</b>

## Specifications and standard fittings:

- **hermetic** hydro pellet stove with a rounded shape, with painted steel sides and cast iron top
- single door with double glass and integrated ventilation system
- **Balanced Door** with self-balancing system
- different levels of ventilation or complete exclusion
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- hide-away digital control panel with touch controls
- operating hours can be programmed on a daily and weekly basis
- integrated interface with external thermostat or for connection to the storage tank
- designed for our **Universal Gateway**
- **Complete Burning System:** total combustion stove with minimum ash production
- **Combustion Dynamic Control** preserves the fuel and combustion air balance, ensuring utmost heat efficiency in all operating conditions
- **Self Cleaning System:** exclusive self-cleaning system for both the brazier and the exchange pipes
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system
- **Star Valve** pellet-feed system
- combustion air ducted from outdoors

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



## Product Details



### Heating by water

Water stove, it can be connected to the heating system directly or integrated into a more advanced system.



### Star valve feed system

Pellet feed system that is very accurate in dosing the quantity of fuel burnt.



### Hydronic unit

Integrated in the product to simplify installation.



### Sealed

Hermetic sealing ensures greater safety and greater installation opportunities.



### Self Cleaning System

Self-cleaning system for the brazier and exchanger tubes.



### Complete Burning System


Continuous burning of combustion residues: lower consumption; greater yield; less frequent cleaning.

# Jackie Hydro TC

Technical features	Min	Max 9	Max 14
Nominal Heat Output <b>kW</b>	3.7	<b>8.7</b>	<b>13.5</b>
Water Heat Output <b>kW</b>	3.3	<b>8</b>	<b>12.5</b>
Efficiency %	96.5	<b>95.2</b>	<b>94.7</b>
Temperatura fumi <b>°C</b>	48.9	<b>75.3</b>	<b>96</b>
Massa fumi <b>g/s</b>	4.7	<b>7.5</b>	<b>9.3</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	299	<b>42</b>	<b>24</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	7	<b>9</b>	<b>14</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	5	<b>2</b>	<b>1</b>
Hourly fuel consumption <b>kg/h</b>	0.79	<b>1.91</b>	<b>2.98</b>
Fuel hopper capacity <b>kg</b>		<b>26</b>	
Flue gas outlet <b>cm</b>		<b>8</b>	
Tiraggio canna fumaria <b>Pa</b>		<b>12(±2)</b>	
Tiraggio minimo per dimensionamento camino <b>Pa</b>		<b>0</b>	
Energy Rating	-	<b>A++</b>	<b>A++</b>


## Safety distances (cm)

**X1 = 80**  
**X2 = 10**  
**Y1 = 20**  
**Y2 = 20**  
**Z = 75**

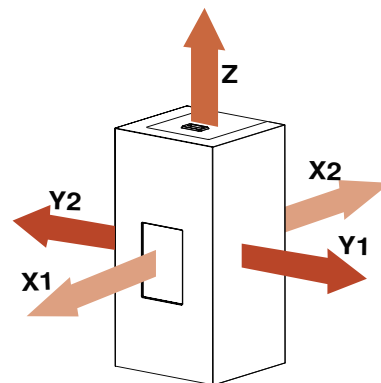


## Dimensions WxDxH cm - Weight kg

**63x66x120 - 225**

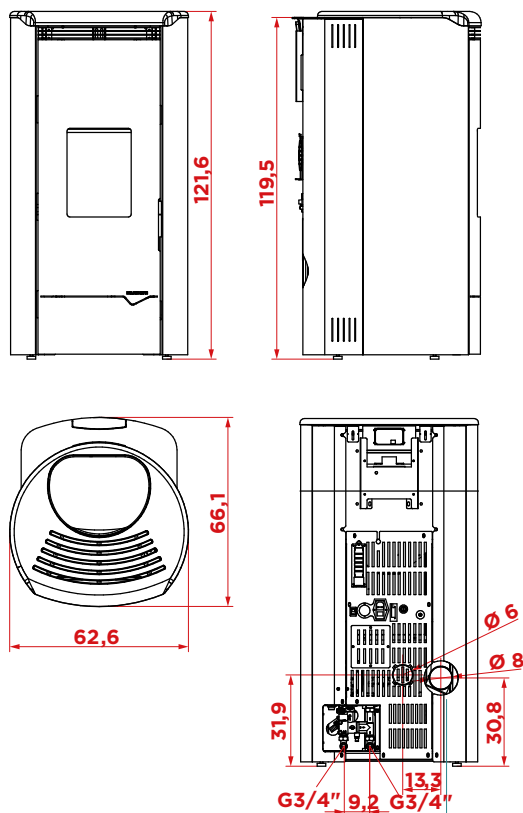

## Packaging (cm)

**B = 85**  
**T = 77**  
**H = 163**  
**Weight = 242 Kg**



The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Jackie Hydro ventilated TC



JACKIE IDRO 20 TC		€
Black Steel	<b>805714122</b>	<b>5,630</b>
Moka Steel	<b>805714123</b>	<b>5,630</b>
Red Steel	<b>805714120</b>	<b>5,630</b>
White Steel	<b>805714121</b>	<b>5,630</b>

JACKIE IDRO 26 TC		€
Black Steel	<b>805714102</b>	<b>5,700</b>
Moka Steel	<b>805714103</b>	<b>5,700</b>
Red Steel	<b>805714100</b>	<b>5,700</b>
White Steel	<b>805714101</b>	<b>5,700</b>

## Specifications and standard fittings:

- **hermetic** hydro-ventilated pellet stove with a rounded shape, with painted steel sides and cast iron top
- single door with double glass and integrated ventilation system
- **Balanced Door** with self-balancing system
- different levels of ventilation or complete exclusion
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- hide-away digital control panel with touch controls
- operating hours can be programmed on a daily and weekly basis
- integrated interface with external thermostat or for connection to the storage tank
- designed for our **Universal Gateway**
- **Complete Burning System**: total combustion stove with minimum ash production
- **Combustion Dynamic Control** preserves the fuel and combustion air balance, ensuring utmost heat efficiency in all operating conditions
- **Self Cleaning System**: exclusive self-cleaning system for both the brazier and the exchange pipes
- **Quick Start** system (reduces ignition time)
- **Star Valve** pellet-feed system
- combustion air ducted from outdoors

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



## Product Details



### Hydronic unit

Integrated in the product to simplify installation.



### Sealed

Hermetic sealing ensures greater safety and greater installation opportunities.



### Heating by water or air

Heats the water for the system and spreads hot air into the environment through a fan.



### Self Cleaning System

Self-cleaning system for the brazier and exchanger tubes.



### Complete Burning System


Continuous burning of combustion residues: lower consumption; greater yield; less frequent cleaning.

# Jackie Hydro ventilated TC

Technical features	Min	Max 19	Max 25
Nominal Heat Output <b>kW</b>	3.7	<b>18.8</b>	<b>25.3</b>
Water Heat Output <b>kW</b>	3.3	<b>18</b>	<b>24</b>
Efficiency %	96.5	<b>94.1</b>	<b>93.8</b>
Temperatura fumi <b>°C</b>	48.9	<b>109.9</b>	<b>126.6</b>
Massa fumi <b>g/s</b>	4.7	<b>10.5</b>	<b>14.4</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	299	<b>12</b>	<b>36</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	7	<b>15</b>	<b>20</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	5	<b>1</b>	<b>3</b>
Hourly fuel consumption <b>kg/h</b>	0.79	<b>4.16</b>	<b>5.62</b>
Fuel hopper capacity <b>kg</b>		<b>26</b>	
Flue gas outlet <b>cm</b>		<b>8</b>	
Tiraggio canna fumaria <b>Pa</b>		<b>12(±2)</b>	
Tiraggio minimo per dimensionamento camino <b>Pa</b>		<b>0</b>	
Energy Rating	-	<b>A++</b>	<b>A++</b>


## Safety distances (cm)

**X1 = 80**  
**X2 = 10**  
**Y1 = 20**  
**Y2 = 20**  
**Z = 75**

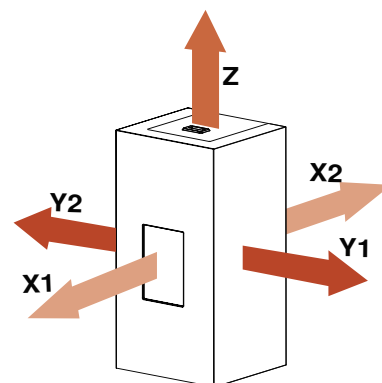


## Dimensions WxDxH cm - Weight kg

**63x66x122 - 225**

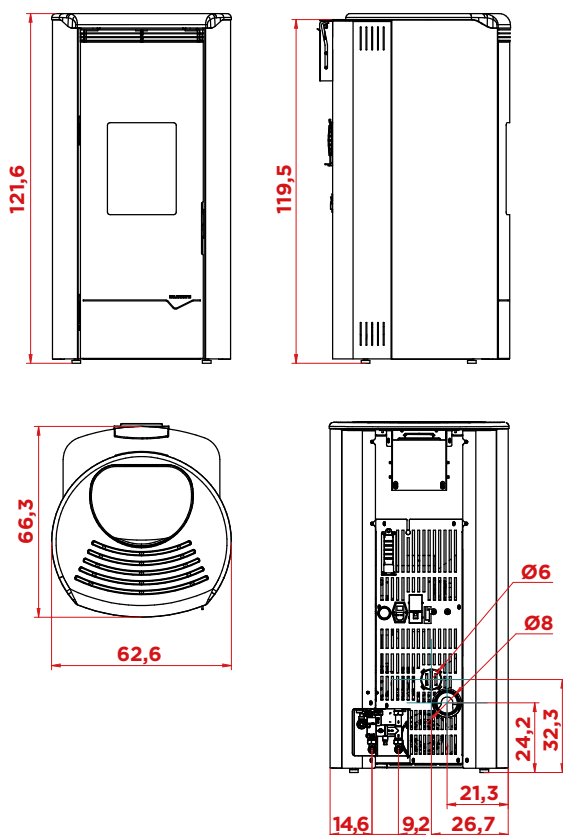

## Packaging (cm)

**B = 85**  
**T = 77**  
**H = 163**  
**Weight = 242 Kg**



The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Martina Idro Lux



<b>MARTINA IDRO LUX 10</b>		€
Black Steel	<b>805713282</b>	<b>3,890</b>
Ivory Steel	<b>805713281</b>	<b>3,890</b>
Red steel	<b>805713280</b>	<b>3,890</b>
<b>MARTINA IDRO LUX 15</b>		€
Black Steel	<b>805713302</b>	<b>3,890</b>
Ivory Steel	<b>805713301</b>	<b>3,890</b>
Red steel *	<b>805713300</b>	<b>3,890</b>

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- steel structure with metal cladding
- firebox and burn pot made of very thick cast iron
- ceramic glass (800°) featuring our air wash system
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- integrated interface with external thermostat or for connection to the storage tank
- designed for our **Universal Gateway**
- firebox with 8 flue gas tubes with turbulators
- **Combustion Dynamic Control** preserves the fuel and combustion air balance, ensuring utmost heat efficiency in all operating conditions
- large ash pan

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Palazzetti Cleaning Kit	<b>892008320</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



## Product Details



**Heating by water**

Water stove, it can be connected to the heating system directly or integrated into a more advanced system.



**Hydronic unit**

Integrated in the product to simplify installation.



**Sealed**

Hermetic sealing ensures greater safety and greater installation opportunities.



**Daily and weekly programming.**

Controls stove switch on and off functions to deliver customised heat.



**Universal Gateway and Palazzetti App**


Allows you to manage the main operating parameters of the stove and BLE accessories from your smartphone using the dedicated app.

# Martina Idro Lux

Technical features	9		15	
	Min	Max	Min	Max
Nominal Heat Output <b>kW</b>	3.4	<b>9.3</b>	4.7	<b>15.4</b>
Water Heat Output <b>kW</b>	2.4	<b>7.7</b>	3.7	<b>14</b>
Efficiency %	95.6	<b>95.3</b>	96.8	<b>95</b>
Temperatura fumi <b>°C</b>	54.6	<b>86.5</b>	65.7	<b>121.3</b>
Massa fumi <b>g/s</b>	3.8	<b>5.9</b>	4.1	<b>8.1</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	162	<b>19.2</b>	119.5	<b>49.1</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	5.2	<b>3</b>	3.2	<b>3.9</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	3.9	<b>0.8</b>	4.3	<b>4.5</b>
Hourly fuel consumption <b>kg/h</b>	0.75	<b>2.02</b>	1	<b>3.3</b>
Fuel hopper capacity <b>kg</b>	45		45	
Flue gas outlet <b>cm</b>	8		8	
Tiraggio canna fumaria <b>Pa</b>	<b>12(±2)</b>			
Tiraggio minimo per dimensionamento camino <b>Pa</b>	<b>0</b>			
Energy Rating	A++		A++	


## Safety distances (cm)

- X1 = 80**
- X2 = 20**
- Y1 = 20**
- Y2 = 20**
- Z = 75**

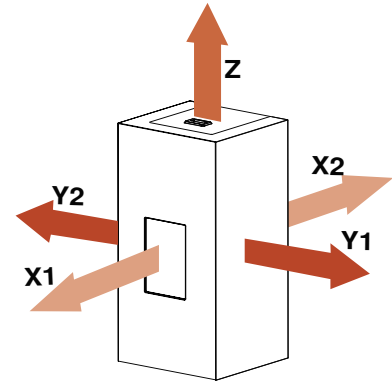


## Dimensions WxDxH cm - Weight kg

**52x59x135 - 180**

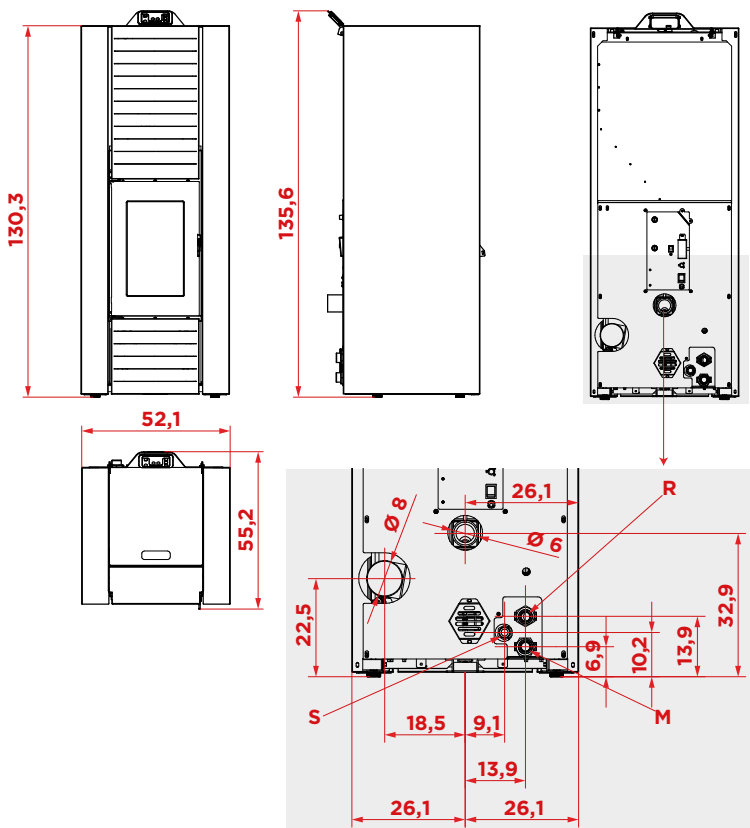

## Packaging (cm)

- B = 70**
- T = 70**
- H = 160**
- Weight = 190 Kg**



The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Mirella Idro



MIRELLA IDRO 10		€
Black Steel	805714002	4,380
Moka Steel	805714003	4,380
Red Steel	805714000	4,380
White Steel	805714001	4,380

MIRELLA IDRO 15		€
Black Steel	805714022	4,380
Moka Steel	805714023	4,380
Red Steel *	805714020	4,380
White Steel	805714021	4,380

## Specifications and standard fittings:

- **sealed stove**, can draw its combustion air directly from outdoors
- it can draw its combustion air directly from outdoors
- two doors, a design one in curved glass and a technical one provided with **Balanced door** system
- ceramic glass (800°) featuring our air wash system
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- digital, touch screen control panel
- operating hours can be programmed on a daily and weekly basis
- integrated interface with external thermostat or for connection to the storage tank
- designed for our **Universal Gateway**
- firebox with 8 flue gas tubes with turbulators
- burn pot in cast iron
- **Combustion Dynamic Control** preserves the fuel and combustion air balance, ensuring utmost heat efficiency in all operating conditions
- large ash pan

## Complementary accessories starting on page 163

Display Premium	892009760
My Cli-Mate Plus	892009407
Palazzetti Cleaning Kit	892008320
Shape Plus remote control	892009022
Universal Gateway	892009404



## Product Details



**Hydronic unit**

Integrated in the product to simplify installation.



**Sealed**

Hermetic sealing ensures greater safety and greater installation opportunities.



**Balanced Door**

Special shock absorbers improve the hermetic seal of the door and dynamically compensate for any expansion.



**Daily and weekly programming.**

Controls stove switch on and off functions to deliver customised heat.



**Universal Gateway and Palazzetti App**


Allows you to manage the main operating parameters of the stove and BLE accessories from your smartphone using the dedicated app.

# Mirella Idro

Technical features	9		15	
	Min	Max	Min	Max
Nominal Heat Output <b>kW</b>	3.4	<b>9.3</b>	4.7	<b>15.4</b>
Water Heat Output <b>kW</b>	2.4	<b>7.7</b>	3.7	<b>14</b>
Efficiency %	95.6	<b>95.3</b>	96.8	<b>95</b>
Temperatura fumi <b>°C</b>	54.6	<b>86.5</b>	65.7	<b>121.3</b>
Massa fumi <b>g/s</b>	3.8	<b>5.9</b>	4.1	<b>8.1</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	162	<b>19.2</b>	119.5	<b>49.1</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	5.2	<b>3</b>	3.2	<b>3.9</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	3.9	<b>0.8</b>	4.3	<b>4.5</b>
Hourly fuel consumption <b>kg/h</b>	0.75	<b>2.02</b>	1	<b>3.3</b>
Fuel hopper capacity <b>kg</b>	25		25	
Flue gas outlet <b>cm</b>	8		8	
Tiraggio canna fumaria <b>Pa</b>	<b>12(±2)</b>			
Tiraggio minimo per dimensionamento camino <b>Pa</b>	<b>0</b>			
Energy Rating	A++		A++	


## Safety distances (cm)

**X1 = 80**  
**X2 = 20**  
**Y1 = 20**  
**Y2 = 20**  
**Z = 75**

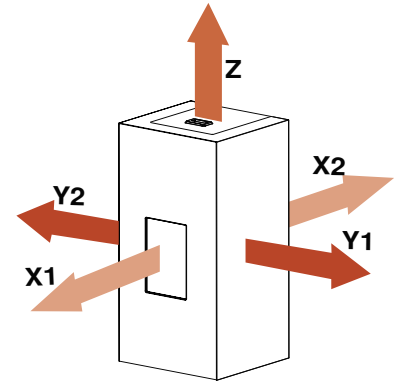


## Dimensions WxDxH cm - Weight kg

**61x59x121 - 180**

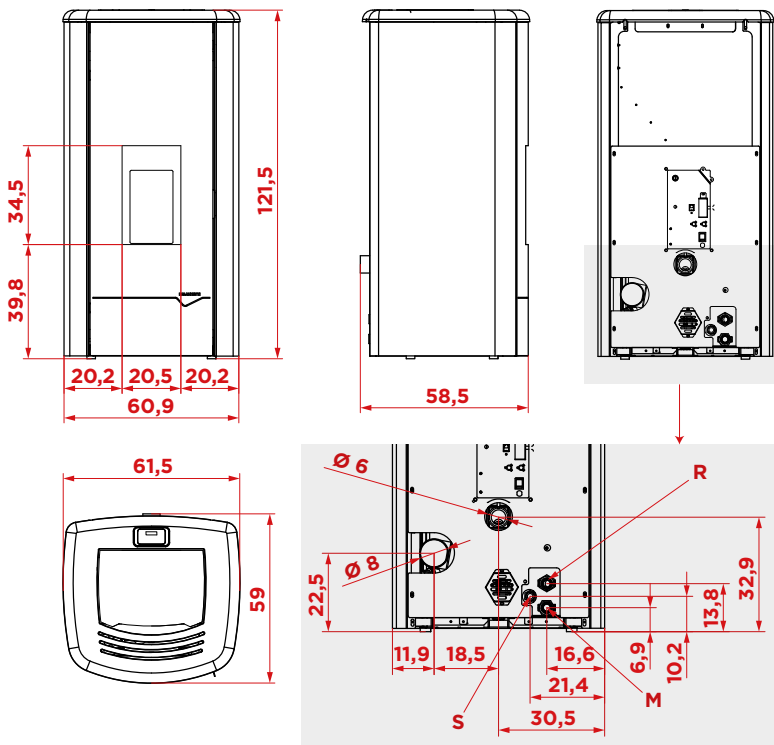

## Packaging (cm)

**B = 70**  
**T = 70**  
**H = 140**  
**Weight = 197 Kg**



The prices are shown in EURO, VAT not included. \*Version shown in the picture.



Pellet-burning  
boilers JPS TC

**Pellet-burning  
boilers JPS TC** p.66

# Boilers

Our range of pellet boilers

# Pellet Boiler JPS TC



Firebox versions		€
JPS TC 18	<b>805712770</b>	<b>5,870</b>
JPS TC 25 *	<b>805712780</b>	<b>5,870</b>
JPS TC 25 DHW	<b>805712790</b>	<b>6,150</b>

## Specifications and standard fittings:

- sealed combustion chamber made by smoke tubes with turbolators
- integrated hydronic unit composed of a circulation pump, a safety valve, a closed expansion tank and a manometer
- **integrated anti-condensation valve**
- **graphic digital display** with touch controls
- operating hours can be programmed on a daily and weekly basis
- integrated interface with external thermostat or for connection to the storage tank
- designed for our **Universal Gateway**
- **Complete Burning System:** total combustion stove with minimum ash production
- **Self Cleaning System:** exclusive self-cleaning system for both the brazier and the exchange pipes
- **Star Valve** pellet-feed system
- combustion air ducted from outdoors

## Optional

Hopper unit with additional fuel hopper	<b>892010170</b>	<b>2,800</b>
---	------------------	--------------

## Complementary accessories starting on page 163

Palazzetti Cleaning Kit	<b>892008320</b>
Universal Gateway	<b>892009404</b>



Technical features	JPS TC 18	JPS TC 25
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>70x63x137</b>	<b>70x63x137</b>
Nominal Heat Output <b>kW</b>	<b>16.1</b>	<b>23.1</b>
Water Heat Output <b>kW</b>	<b>16</b>	<b>23</b>
Efficiency <b>%</b>	<b>93.8</b>	<b>92.4</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>2 - 1</b>	<b>9 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>50</b>	<b>50</b>
Hourly fuel consumption <b>kg/h</b>	<b>1.12 - 3.56</b>	<b>1.12 - 5.14</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



BOILERS



Wood-burning stoves Charlotte

<b>Asia</b> p.70	<b>Eva with oven</b> p.78
<b>Charlotte</b> p.71	<b>Eva fan-assisted</b>
<b>Charlotte ceramic</b> p.72	<b>(ductable)</b> p.78
<b>Dalia</b> p.74	<b>Iki 16:9</b> p.79
<b>Dorotea</b> p.73	<b>Nicole</b> p.79
<b>Elisa</b> p.74	<b>Nicole in cast iron</b> p.80
<b>Elisa with oven</b> p.75	<b>Nicole with open</b>
<b>Erica with Heat</b>	<b>compartment</b> p.80
<b>Accumulator</b> p.75	<b>Oscar</b> p.81
<b>Elsa New</b> p.76	<b>Sofia</b> p.81
<b>Eva</b> p.77	<b>Sahara</b> p.82
<b>Eva with Heat</b>	
<b>Accumulator</b> p.77	

# Wood-burning stoves

Our range of wood-burning stoves  
heat naturally by radiation  
or by fan-assisted air distribution

# Asia



Asia with an optional base/firewood holder

<b>Asia 70</b>		€
Black Steel	<b>805201240</b>	<b>2,630</b>
White Steel	<b>805201241</b>	<b>2,630</b>
<b>Asia 80</b>		€
Black Steel	<b>805201230</b>	<b>3,060</b>
White Steel *	<b>805201231</b>	<b>3,060</b>

## Specifications and standard fittings:

- inside is in **Thermofix**<sup>®</sup> with a cast iron base
- compact, steel structure
- it can be installed free-standing or completed with the optional wood-holder base
- heats by radiation and natural convection
- optional kits offer the possibility of front hot air delivery
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- combustion air ducted from outdoors

The ventilation kit (optional) is equipped with a speed controller to be mounted on the back of the stove.

## Optional

Asia 70 front fan kit	<b>892009840</b>	<b>185</b>
Asia 80 front fan kit	<b>892009710</b>	<b>185</b>
Base for Asia 70 black	<b>892009830</b>	<b>395</b>
Base for Asia 70 white	<b>892009831</b>	<b>395</b>
Base for Asia 80 black	<b>892009740</b>	<b>465</b>
Base for Asia 80 white *	<b>892009741</b>	<b>465</b>



Asia in the freestanding version

<b>Technical features</b>	<b>Asia 70</b>	<b>Asia 80</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>64x52x58 - 160</b>	<b>78x54x64 - 195</b>
Heat input <b>kW</b>	<b>10.2</b>	<b>14.3</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>12.4</b>
Efficiency %	<b>88.3</b>	<b>86.8</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>22 - 23</b>	<b>14 - 26</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>18</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Charlotte



<b>Charlotte 10G</b>		€
Black Steel *	<b>805300800</b>	<b>2,180</b>
Caffellatte Steel	<b>805300821</b>	<b>2,180</b>

## Specifications and standard fittings:

- wood stove with painted steel cladding and cast iron top and base
- heats by radiation and natural convection
- large, deep combustion chamber burns medium/large logs
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- combustion air ducted from outdoors
- **Charlotte 10G**: cast iron firebox and upper deflector in Magnofix

## Optional

Charlotte thermal storage kit	<b>892010010</b>	<b>330</b>
-------------------------------	------------------	------------

## Complementary accessories starting on page 163

Volcanic stone hotplate	<b>892010090</b>	
-------------------------	------------------	--



<b>Technical features</b>	<b>Charlotte 10G</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>58x55x95 - 150</b>
Heat input <b>kW</b>	<b>12.1</b>
Nominal Heat Output <b>kW</b>	<b>10.4</b>
Efficiency %	<b>85</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>10 - 30</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Charlotte ceramic



## Firebox versions

		€
Charlotte 10G *	805300810	2,030

## Cladding

Matt White Ceramic *	894435220	500
Caffelatte Ceramic	894435222	500
Black Ceramic	894435223	500

## Specifications and standard fittings:

- wood stove with ceramic cladding and cast iron top and base
- cast iron firebox and refractory material baffle
- heats by radiation and natural convection
- large, deep combustion chamber burns medium/large logs
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- combustion air ducted from outdoors
- **Charlotte 10G**: cast iron firebox and upper deflector in Magnofix

## Optional

Charlotte thermal storage kit	892010010	330
-------------------------------	-----------	-----

## Complementary accessories starting on page 163

Volcanic stone hotplate	892010090	
-------------------------	-----------	--



## Technical features

	Charlotte 10G
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>58x55x95 - 200</b>
Heat input <b>kW</b>	<b>12.1</b>
Nominal Heat Output <b>kW</b>	<b>10.4</b>
Efficiency <b>%</b>	<b>85</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>10 - 30</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



## Firebox versions

		€
Dorotea *	<b>805300860</b>	<b>2,030</b>

## Cladding

Glossy Cream Ceramic	<b>894435261</b>	<b>350</b>
Burgundy Ceramic *	<b>894435260</b>	<b>350</b>
Cast iron	<b>894435270</b>	<b>300</b>
Caffellatte Steel	<b>892010221</b>	<b>150</b>
Black Steel	<b>892010220</b>	<b>150</b>

## Specifications and standard fittings:

- wood-burning stove with a traditional design, featuring a cast iron top and cladding available in cast iron, ceramic, or metal.
- cast iron firebox and refractory material baffle
- heats by radiation and natural convection
- large, deep combustion chamber burns medium/large logs
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- combustion air ducted from outdoors

## Complementary accessories starting on page 163

Volcanic stone hotplate	<b>892010300</b>
-------------------------	------------------



## Technical features

	Dorotea
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>57x54x87 - 140</b>
Heat input <b>kW</b>	<b>12.1</b>
Nominal Heat Output <b>kW</b>	<b>10.4</b>
Efficiency %	<b>85</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>10 - 30</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Dalia



<b>Dalia</b>		<b>€</b>
Caffelatte Ceramic	<b>805301270</b>	<b>4,290</b>
Red Ceramic	<b>805301250</b>	<b>4,290</b>
White Ceramic *	<b>805301260</b>	<b>4,290</b>



## Specifications and standard fittings:

- a rounded stove clad with ceramic cladding and top
- firebox made of **Thermofix**\*
- automatic door closing system
- innovative, patented air adjustment system
- combustion air ducted from outdoors

# Elisa



<b>Firebox versions</b>		<b>€</b>
Elisa *	<b>805101090</b>	<b>1,980</b>

<b>Cladding</b>		
Beige Ceramic	<b>894434020</b>	<b>795</b>
Sahara-Yellow Ceramic	<b>894434010</b>	<b>795</b>
Burgundy Ceramic *	<b>894434000</b>	<b>795</b>



## Specifications and standard fittings:

- made from metal with ceramic cladding
- large ceramic glass door for a fascinating view of the fire
- firebox in **Magnofix**\* to optimize the radiant heating

<b>Technical features</b>	<b>Dalia</b>	<b>Elisa</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>55x51x122 - 190</b>	<b>58x50.6x106 - 160</b>
Heat input <b>kW</b>	<b>9.4</b>	<b>11</b>
Nominal Heat Output <b>kW</b>	<b>7</b>	<b>9.7</b>
Efficiency <b>%</b>	<b>77</b>	<b>88.3</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>18 - 48</b>	<b>30 - 36</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>15</b>
Energy Rating	<b>A</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Elisa with Oven



Firebox versions		€
Elisa with oven *	<b>805101100</b>	<b>2,280</b>

Cladding		
Beige Ceramic *	<b>894434070</b>	<b>980</b>
Sahara-Yellow Ceramic	<b>894434060</b>	<b>980</b>
Burgundy Ceramic	<b>894434050</b>	<b>980</b>



## Specifications and standard fittings:

- made from metal with ceramic cladding
- large ceramic glass door for a fascinating view of the fire
- the practical oven is heated by the fire in the firebox
- firebox in **Magnofix**\* to optimize the radiant heating
- **oven:** 26x36x23

# Erica with Heat Accumulator



Erica with heat accumulator		€
Black Steel *	<b>805705520</b>	<b>4,020</b>

Optional		
Primary air connection kit	<b>892005150</b>	<b>125</b>



## Specifications and standard fittings:

- with a special, elliptical shape, made from black painted steel with a chromed finish and a curved glass door
- our After Flame technology guarantees various hours of additional heat even after the stove has gone out
- firebox in **Magnofix**\* to optimize the radiant heating
- combustion air ducted from outdoors

Technical features	Erica with heat accumulator	Elisa with oven
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>47x44x150 - 206</b>	<b>60.5x52x140 - 180</b>
Heat input <b>kW</b>	<b>10</b>	<b>11</b>
Nominal Heat Output <b>kW</b>	<b>8.3</b>	<b>9.7</b>
Efficiency %	<b>82.7</b>	<b>88.3</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>18 - 57</b>	<b>30 - 36</b>
Recommended fuel quantity <b>kg/h</b>	<b>2</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>15</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Elsa New



Firebox versions		€
Elsa New *	<b>805200940</b>	<b>2,760</b>

Cladding		
Beige Ceramic *	<b>894435111</b>	<b>1,160</b>
Caffelatte Ceramic	<b>894435112</b>	<b>1,160</b>
Cream Ceramic	<b>894435113</b>	<b>1,160</b>
Red Ceramic	<b>894435110</b>	<b>1,160</b>

## Specifications and standard fittings:

- wood-burning stove clad with coloured ceramic tiles, standing on a cast iron base
- provided with a **Thermofix**® firebox with cast iron base and the possibility of drawing the combustion air directly from outdoors
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- combustion air ducted from outdoors

**Elsa New:** designed to ventilate or duct hot air in multiple rooms through the dedicated kits

## Optional

Elsa New ducting kit	<b>892009601</b>	<b>515</b>
Elsa New front fan kit	<b>892009600</b>	<b>210</b>



Technical features	Elsa New
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>80x56x100 - 225</b>
Heat input <b>kW</b>	<b>10.2</b>
Nominal Heat Output <b>kW</b>	<b>9</b>
Efficiency %	<b>88.3</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>22 - 23</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



<b>Eva S</b>		<b>€</b>
Anthracite Steel	<b>805300430</b>	<b>2,960</b>
Caffellatte Ceramic	<b>805300420</b>	<b>3,700</b>
Soapstone	<b>805300440</b>	<b>4,220</b>
White Ceramic *	<b>805300400</b>	<b>3,700</b>



### Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- steel structure with satin nickel finishes and cladding in ceramic, steel or soapstone
- automatic door closing system
- innovative, patented air adjustment system
- combustion air ducted from outdoors

## Eva with Heat Accumulator



<b>Eva S with heat accumulator</b>		<b>€</b>
Anthracite Steel	<b>805300530</b>	<b>3,210</b>
Caffellatte Ceramic	<b>805300520</b>	<b>4,285</b>
Soapstone *	<b>805300540</b>	<b>4,985</b>
White Ceramic	<b>805300500</b>	<b>4,285</b>



### Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- steel structure with satin nickel finishes and cladding in ceramic, steel or soapstone
- automatic door closing system
- our After Flame technology guarantees various hours of additional heat even after the stove has gone out
- combustion air ducted from outdoors

<b>Technical features</b>	<b>Eva S</b>	<b>Eva S with heat accumulator</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>44x45x124 - 170</b>	<b>44x45x150 - 230</b>
Heat input <b>kW</b>	<b>9.4</b>	<b>9.4</b>
Nominal Heat Output <b>kW</b>	<b>7</b>	<b>7</b>
Efficiency %	<b>77</b>	<b>77</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>18 - 48</b>	<b>18 - 48</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>15</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Eva with Oven



<b>Eva S with oven</b>		<b>€</b>
Anthracite Steel	<b>805300450</b>	<b>3,560</b>
Caffellatte Ceramic	<b>805300480</b>	<b>4,635</b>
Soapstone	<b>805300490</b>	<b>5,335</b>
White Ceramic *	<b>805300470</b>	<b>4,635</b>



## Specifications and standard fittings:

- steel structure with satin nickel finishes and cladding in ceramic, steel or soapstone
- automatic door closing system
- provided with an oven; thermometer and oven rack provided
- combustion air ducted from outdoors
- **oven:** 26x36x23

# Eva fan-assisted (ductable)



<b>Eva S fan-assisted</b>		<b>€</b>
Anthracite Steel *	<b>805300600</b>	<b>3,960</b>



## Specifications and standard fittings:

- steel cladding lacquered in anthracite with nickel trims and an automatically-closing door
- radial fan with digital display to duct hot air to other rooms
- combustion air ducted from outdoors

<b>Technical features</b>	<b>Eva S fan-assisted</b>	<b>Eva S with oven</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>44x45x150 - 180</b>	<b>44x45x150 - 230</b>
Heat input <b>kW</b>	<b>9.4</b>	<b>9.4</b>
Nominal Heat Output <b>kW</b>	<b>7</b>	<b>7</b>
Efficiency %	<b>77</b>	<b>77</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>18 - 48</b>	<b>18 - 48</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>15</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Iki 16:9



Iki 16:9		€
Black Steel *	<b>805201160</b>	<b>4,980</b>
<b>Optional</b>		
Metal base	<b>892007243</b>	<b>1,100</b>



## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- structure in painted steel
- ceramic glass lift-up door with a minimal design to leave more room to admire the fire
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates
- combustion air ducted from outdoors

# Nicole



Nicole		€
Anthracite Steel *	<b>805300700</b>	<b>2,980</b>
Soapstone	<b>805300710</b>	<b>4,280</b>



## Specifications and standard fittings:

- made from steel, with steel or soapstone cladding
- large door provided with an automatic door closer and a stopper that is activated automatically when the door is wide open
- can burn large logs up to 50 cm long
- innovative, patented air adjustment system
- combustion air ducted from outdoors

Technical features	Nicole	Iki 16:9
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>78x50x95 - 130</b>	<b>114x54x66 - 278</b>
Heat input <b>kW</b>	<b>11.5</b>	<b>15.4</b>
Nominal Heat Output <b>kW</b>	<b>9.1</b>	<b>12</b>
Efficiency %	<b>79</b>	<b>78.2</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>29 - 48</b>	<b>29 - 21</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>18</b>	<b>18</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Nicole in Cast Iron



## Firebox versions

		€
Nicole in Cast Iron *	<b>805300780</b>	<b>4,280</b>



### Specifications and standard fittings:

- wood stove with cast iron cladding
- large door provided with an automatic door closer and a stopper that is activated automatically when the door is wide open
- can burn large logs up to 50 cm long
- innovative, patented air adjustment system
- combustion air ducted from outdoors

# Nicole with open compartment



## Nicole with open compartment

		€
Anthracite Steel	<b>805300740</b>	<b>3,020</b>
Soapstone *	<b>805300750</b>	<b>4,280</b>



### Specifications and standard fittings:

- made from steel, with steel or soapstone cladding
- large door provided with an automatic door closer and a stopper that is activated automatically when the door is wide open
- can burn large logs up to 50 cm long
- innovative, patented air adjustment system
- combustion air ducted from outdoors

Technical features	Nicole with open compartment	Nicole in Cast Iron
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>78x50x95 - 130</b>	<b>78x50x95 - 260</b>
Heat input <b>kW</b>	<b>11.5</b>	<b>11.5</b>
Nominal Heat Output <b>kW</b>	<b>9.1</b>	<b>9.1</b>
Efficiency %	<b>79</b>	<b>79</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>29 - 48</b>	<b>29 - 48</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>18</b>	<b>18</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Oscar



Oscar 8		€
Anthracite cast iron *	<b>805300200</b>	<b>2,090</b>
Soapstone	<b>805300210</b>	<b>2,220</b>



## Specifications and standard fittings:

- vintage design
- available in the cast iron or soapstone versions
- cast iron firebox and refractory material baffle
- cool-touch silicone rubber handle
- large, deep combustion chamber burns medium/large logs

# Sofia



Sofia		€
Anthracite Steel	<b>805301300</b>	<b>3,210</b>
Moka Steel *	<b>805301310</b>	<b>3,210</b>



## Specifications and standard fittings:

- a rounded stove clad with lacquered steel and with a ceramic top
- firebox made of **Thermofix**<sup>®</sup>
- automatic door closing system
- innovative, patented air adjustment system
- combustion air ducted from outdoors

Technical features	Sofia	Oscar 8
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>55x51x122 - 140</b>	<b>57x57x92 - 145</b>
Heat input <b>kW</b>	<b>9.4</b>	<b>10.2</b>
Nominal Heat Output <b>kW</b>	<b>7</b>	<b>8</b>
Efficiency %	<b>77</b>	<b>78.3</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>18 - 48</b>	<b>12.5 - 28.7</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>15</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Sahara



<b>Sahara 70</b>		€
Black Hotstone *	<b>805201300</b>	<b>3,860</b>
<b>Sahara 80</b>		€
Black Hotstone	<b>805201310</b>	<b>4,290</b>

## Specifications and standard fittings:

- inside is in **Thermofix**<sup>®</sup> with a cast iron base
- the cladding is in Hot Stone; a special material that accumulates heat and releases it slowly for several hours
- heats by radiation and natural convection
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- combustion air ducted from outdoors



<b>Technical features</b>	<b>Sahara 70</b>	<b>Sahara 80</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>71x50x88 - 210</b>	<b>85x52x88 - 250</b>
Heat input <b>kW</b>	<b>10.2</b>	<b>14.3</b>
Nominal Heat Output <b>kW</b>	<b>9</b>	<b>12.4</b>
Efficiency %	<b>88.3</b>	<b>86.8</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>22 - 23</b>	<b>14 - 26</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>	<b>18</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



Wood-burning stoves Charlotte



Firebox Inserto A70S with custom-made cladding

**Pellet Insert  
Small 54** p.86  
**Pellet Insert A70S** p.87  
**Pellet Insert A78** p.88

**Pellet Insert AC78** p.89  
**Hydro/Ventilated Pellet  
Insert TC** p.90

# Ecofire® inserts

Our range of hydronic or fan-assisted and ductable, air-heating, pellet firebox inserts. The ideal way to renew an old, open fireplace

# Pellet Insert Small 54



## Firebox versions

		€
SMALL 54T *	<b>805804512</b>	<b>3,080</b>

## Specifications and standard fittings:

- air pellet insert
- **Balanced Door** with self-balancing system
- front fan with various speed settings
- digital display to manage settings and operating parameters
- digital programmer to set operating hours
- designed for our **Universal Gateway**
- cast iron burning pot and firebox sides in **Thermofix\***
- pellet level sensor

54x57x48: measurements exclude front pellet drawer (optional)  
 54x57x55: measurements include front pellet drawer (optional)

## Optional

Feeding kit for ecofire Small 54	<b>892005850</b>	<b>325</b>
Finishing frame for Small 54 with Front feed kit	<b>892005590</b>	<b>135</b>
Finishing frame for Small 54 without front feed kit	<b>892005760</b>	<b>125</b>
Front feed kit Small 54	<b>892005960</b>	<b>335</b>
Pedestal kit	<b>892005390</b>	<b>315</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	SMALL 54T
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>54x57x48 - 100</b>
Nominal Heat Output <b>kW</b>	<b>5.7</b>
Efficiency <b>%</b>	<b>87.1</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>19.8 - 2</b>
Fuel hopper capacity <b>kg</b>	<b>10</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.55 - 1.34</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Pellet Insert A70S



## Firebox versions

		€
Pellet Insert A70S *	<b>805810300</b>	<b>3,450</b>

## Specifications and standard fittings:

- air pellet insert
- **Balanced Door** with self-balancing system
- combustion air can be ducted directly from outdoors
- ventilation is simultaneously controlled by two, centrifugal fans
- digital display to plan and manage functions, with touch controls
- designed for our **Universal Gateway**
- cast iron burning pot and firebox sides in **Thermofix\***
- pellet level sensor

With the optional ducting kit, the dimensions of the insert are: 70x46x56h cm.

With the optional drawer kit (not compatible with ducting kit): 70x46x58h cm.

## Optional

A70S conduit kit	<b>892010210</b>	<b>285</b>
Compensation profile for A70S with drawer	<b>892010290</b>	<b>140</b>
Compensation profile for A70S with ducting kit.	<b>892008674</b>	<b>140</b>
Compensation profiles for A70S insert	<b>892008673</b>	<b>140</b>
Finishing frame A70S	<b>892008675</b>	<b>145</b>
Finishing frame for A70S with conduit kit	<b>892008676</b>	<b>145</b>
Finishing frame for A70S with drawer	<b>892010280</b>	<b>145</b>
Front drawer kit for A70S	<b>892010270</b>	<b>490</b>
Pedestal kit	<b>892008593</b>	<b>335</b>
Pellet feed kit	<b>892006542</b>	<b>240</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
My Cli-Mate Plus	<b>892009407</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	Pellet Insert A70S
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>70x48x52 - 110</b>
Nominal Heat Output <b>kW</b>	<b>9</b>
Efficiency <b>%</b>	<b>91</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>5 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>11</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.63 - 2.03</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Pellet Insert A78

## Firebox versions

		€
Pellet Insert A78 *	<b>805805160</b>	<b>4,330</b>



### Specifications and standard fittings:

- air pellet insert
- **Balanced Door** with self-balancing system
- top designed for pellet feed system
- front fan with various speed settings
- digital display to manage settings and operating parameters
- digital programmer to set operating hours
- designed for our **Universal Gateway**
- pellet level sensor

### Optional

Finishing frame	<b>895736930</b>	<b>190</b>
Pedestal kit	<b>892005840</b>	<b>315</b>
Pellet feed kit	<b>892006542</b>	<b>240</b>

### Complementary accessories starting on page 163

Display Premium	<b>892009760</b>	
My Cli-Mate Plus	<b>892009407</b>	
Shape Plus remote control	<b>892009022</b>	
Universal Gateway	<b>892009404</b>	



### Technical features Pellet Insert A78

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>78x65x57 - 150</b>
Nominal Heat Output <b>kW</b>	<b>12.5</b>
Efficiency <b>%</b>	<b>87.1</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>18.3 - 5.9</b>
Fuel hopper capacity <b>kg</b>	<b>23</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.8 - 2.95</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Pellet Insert AC78



## Firebox versions

		€
Pellet Insert AC78 *	<b>805805170</b>	<b>4,680</b>

## Specifications and standard fittings:

- air pellet insert
- **Balanced Door** with self-balancing system
- top designed for pellet feed system
- pedestal
- 680m<sup>3</sup>/h hot air ducting fan
- digital display to manage settings and operating parameters
- digital programmer to set operating hours
- designed for our **Universal Gateway**
- pellet level sensor

## Optional

Finishing frame	<b>895736930</b>	<b>190</b>
Pellet feed kit	<b>892006542</b>	<b>240</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>	
My Cli-Mate Plus	<b>892009407</b>	
Shape Plus remote control	<b>892009022</b>	
Universal Gateway	<b>892009404</b>	



Technical features	Pellet Insert AC78
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>78x65x100 - 160</b>
Nominal Heat Output <b>kW</b>	<b>12.5</b>
Efficiency <b>%</b>	<b>87.1</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>18.3 - 5.9</b>
Fuel hopper capacity <b>kg</b>	<b>23</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.8 - 2.95</b>
Flue gas outlet <b>cm</b>	<b>8</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Hydro Ventilated Pellet Insert TC



Firebox versions		€
Hydro Pellet Insert TC V15	<b>805715400</b>	<b>5,730</b>
Hydro Pellet Insert TC V20 *	<b>805715410</b>	<b>5,730</b>
Hydro Pellet Insert TC V24	<b>805715420</b>	<b>5,730</b>

## Specifications and standard fittings:

- hydronic pellet insert with fan option
- **Balanced Door** with self-balancing system
- top designed for pellet feed system
- complete hydronic unit with an A energy rated circulation pump, a closed expansion tank, a safety valve, a manometer, an air purge valve and an anti-condensation valve
- digital, touch screen control panel
- designed for our **Universal Gateway**
- **Complete Burning System:** total combustion stove with minimum ash production
- **Self Cleaning System:** exclusive brazier self-cleaning system
- large ash pan
- pellet level sensor
- **Quick Start** system (reduces ignition time)
- great autonomy thanks to the 45 kg tank (3 bags of pellets)

## Optional

Finishing frame	<b>892009660</b>	<b>205</b>
Outdoor combustion air connector kit	<b>892009670</b>	<b>125</b>
Pellet feed kit*	<b>892006542</b>	<b>240</b>
Supporting framework (85x45 cm)*	<b>892009700</b>	<b>315</b>

## Complementary accessories starting on page 163

Display Premium	<b>892009760</b>
Shape Plus remote control	<b>892009022</b>
Universal Gateway	<b>892009404</b>



Technical features	Hydro Pellet Insert TC V15	Hydro Pellet Insert TC V20	Hydro Pellet Insert TC V24
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>86x70x78 - 250</b>	<b>86x70x78 - 250</b>	<b>86x70x78 - 250</b>
Nominal Heat Output <b>kW</b>	<b>15.2</b>	<b>20.4</b>	<b>23.8</b>
Water Heat Output <b>kW</b>	<b>14.2</b>	<b>19</b>	<b>22.2</b>
Efficiency <b>%</b>	<b>95</b>	<b>94.8</b>	<b>94.7</b>
Dust - OGC (13% O2) <b>mg/Nm<sup>3</sup></b>	<b>5 - 1</b>	<b>11 - 1</b>	<b>14.2 - 1</b>
Fuel hopper capacity <b>kg</b>	<b>45</b>	<b>45</b>	<b>45</b>
Hourly fuel consumption <b>kg/h</b>	<b>1.49 - 3.4</b>	<b>1.49 - 4.57</b>	<b>1.49 - 5.34</b>
Flue gas outlet <b>cm</b>	<b>8</b>	<b>8</b>	<b>8</b>
Energy Rating	<b>A++</b>	<b>A++</b>	<b>A++</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



ECOFIRE® INSERTS

Firebox Hydro/fan-assisted Ecofire® Insert with Nantes cladding



Firebox Multifire with Paros cladding

**Multifire NT Aria** p.94

**Multifire NT Idro** p.96

# Multifire

Our range of hybrid, wood/pellet fireboxes

# Multifire NT Aria



## Firebox versions

		€
NT Aria 15 left *	<b>802604130</b>	<b>8,400</b>
NT Aria 15 right	<b>802604120</b>	<b>8,400</b>
NT Aria 18 left	<b>802604110</b>	<b>8,400</b>
NT Aria 18 right	<b>802604100</b>	<b>8,400</b>

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- hide-away door
- very flexible installation, the pellet hopper is available on the right or left-hand side
- designed to duct hot air to various rooms with the aid of a 680 m<sup>3</sup>/h centrifugal fan
- automatic ignition
- digital display with touch controls
- designed for our **Universal Gateway**
- **self-cleaning burn pot**
- automatic wood/pellet switch-over
- by-pass valve expels flue gases when the door is opened
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates
- the combustion air can be taken directly from outdoors

## Optional

Ash drawer door (45,5x50cm)	<b>892007570</b>	<b>270</b>
Side bottom hopper lid and feed (167x57,5cm)	<b>892007580</b>	<b>485</b>

## Complementary accessories starting on page 163

Universal Gateway	<b>892009404</b>
-------------------	------------------



<b>Technical features</b>	<b>NT Aria 15 left</b>	<b>NT Aria 15 right</b>	<b>NT Aria 18 left</b>	<b>NT Aria 18 right</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>103x70x183 - 385</b>	<b>103x70x183 - 385</b>	<b>103x70x183 - 385</b>	<b>103x70x183 - 385</b>
Heat input <b>kW</b>	<b>pellet 16.5 wood 17</b>	<b>pellet 16.5 wood 17</b>	<b>pellet 20.2 wood 19.7</b>	<b>pellet 20.2 wood 19.7</b>
Nominal Heat Output <b>kW</b>	<b>pellet 15 wood 15</b>	<b>pellet 15 wood 15</b>	<b>pellet 18.2 wood 17.3</b>	<b>pellet 18.2 wood 17.3</b>
Efficiency %	<b>pellet 90.9 wood 88.1</b>	<b>pellet 90.9 wood 88.1</b>	<b>pellet 90 wood 88</b>	<b>pellet 90 wood 88</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>pellet 19 - 2 wood 34.1 - 52.1</b>	<b>pellet 19 - 2 wood 34.1 - 52.1</b>	<b>pellet 20 - 2 wood 37.2 - 40.7</b>	<b>pellet 20 - 2 wood 37.2 - 40.7</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>	<b>3.5</b>	<b>4</b>	<b>4</b>
Fuel hopper capacity <b>kg</b>	<b>38</b>	<b>38</b>	<b>38</b>	<b>38</b>
Hourly fuel consumption <b>kg/h</b>	<b>0.78 - 3.4</b>	<b>0.78 - 3.4</b>	<b>0.78 - 4.16</b>	<b>0.78 - 4.16</b>
Flue gas outlet <b>cm</b>	<b>18</b>	<b>18</b>	<b>18</b>	<b>18</b>
Energy Rating	<b>pellet A+ wood A+</b>	<b>pellet A+ wood A+</b>	<b>pellet A+ wood A+</b>	<b>pellet A+ wood A+</b>



## Brooklyn

**cm 96x1,5x167h**

A modern cladding with coloured inserts, designed to house a multifire NT firebox. It features a painted steel frame and two front hatches that can be opened to inspect and service the firebox.

# Multifire NT Idro



Firebox versions		€
NT Idro 15 right	<b>802602720</b>	<b>9,300</b>
NT Idro 15 left	<b>802602740</b>	<b>9,300</b>
NT Idro 22 left *	<b>802602750</b>	<b>9,300</b>
NT Idro 22 right	<b>802602730</b>	<b>9,300</b>

## Specifications and standard fittings:

- **hibrid wood/pellet** firebox for water central heating
- hide-away door
- very flexible installation, the pellet hopper is available on the right or left-hand side
- maximum heat transfer to the water
- safety dissipater provided with a heat discharge valve
- integrated hydronic unit: comprising a circulation pump, safety valve, closed expansion tank and anti-condensation valve
- automatic ignition
- designed for our **Universal Gateway**
- **self-cleaning burn pot**
- **Magnofix**<sup>®</sup> firebox
- automatic wood/pellet switch-over
- by-pass valve expels flue gases when the door is opened
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates

## Optional

Ash drawer door (45,5x50cm)	<b>892007570</b>	<b>270</b>
Side bottom hopper lid and feed (167x57,5cm)	<b>892007580</b>	<b>485</b>

## Complementary accessories starting on page 163

Universal Gateway	<b>892009404</b>
-------------------	------------------



<b>Technical features</b>	<b>NT Idro 15 right</b>	<b>NT Idro 15 left</b>	<b>NT Idro 22 left</b>	<b>NT Idro 22 right</b>
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>103x70x183 - 385</b>	<b>103x70x183 - 385</b>	<b>103x70x183 - 385</b>	<b>103x70x183 - 385</b>
Heat input <b>kW</b>	<b>pellet 16.5</b> <b>wood 15.1</b>	<b>pellet 16.5</b> <b>wood 15.1</b>	<b>pellet 23.9</b> <b>wood 20.7</b>	<b>pellet 23.9</b> <b>wood 20.7</b>
Nominal Heat Output <b>kW</b>	<b>pellet 15.3</b> <b>wood 13.3</b>	<b>pellet 15.3</b> <b>wood 13.3</b>	<b>pellet 22</b> <b>wood 18.1</b>	<b>pellet 22</b> <b>wood 18.1</b>
Water Heat Output <b>kW</b>	<b>pellet 12.2</b> <b>wood 10.1</b>	<b>pellet 12.2</b> <b>wood 10.1</b>	<b>pellet 17.8</b> <b>wood 14.2</b>	<b>pellet 17.8</b> <b>wood 14.2</b>
Efficiency %	<b>pellet 92.5</b> <b>wood 88.4</b>	<b>pellet 92.5</b> <b>wood 88.4</b>	<b>pellet 91.9</b> <b>wood 87.5</b>	<b>pellet 91.9</b> <b>wood 87.5</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>pellet 19.5 - 2.1</b> <b>wood 13.3 - 75.4</b>	<b>pellet 19.5 - 2.1</b> <b>wood 13.3 - 75.4</b>	<b>pellet 19.9 - 1.9</b> <b>wood 14.5 - 44.3</b>	<b>pellet 19.9 - 1.9</b> <b>wood 14.5 - 44.3</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>	<b>3.5</b>	<b>4.5</b>	<b>4.5</b>
Fuel hopper capacity <b>kg</b>	<b>30</b>	<b>30</b>	<b>30</b>	<b>30</b>
Hourly fuel consumption <b>kg/h</b>	<b>1.04 - 3.26</b>	<b>1.04 - 3.26</b>	<b>1.04 - 4.71</b>	<b>1.04 - 4.71</b>
Flue gas outlet <b>cm</b>	<b>18</b>	<b>18</b>	<b>18</b>	<b>18</b>
Energy Rating	<b>pellet A+</b> <b>wood A+</b>	<b>pellet A+</b> <b>wood A+</b>	<b>pellet A+</b> <b>wood A+</b>	<b>pellet A+</b> <b>wood A+</b>



## Manhattan

**67x2,5x190 cm**

This tall, vertical stove has been designed to complement the upward motion of the flames. Built to house the multifire NT model, it features a painted steel frame and two front hatches that can be opened to inspect and service the firebox.



Firebox Ecopalex<sup>®</sup> GTM with custom-made cladding

**Ecopalex® GTM 70** p.100  
**Ecopalex® GTM 80** p.101  
**Ecopalex® GTM 80 Corner** p.102  
**Ecopalex® GTM 90** p.103  
**Bricks cladding for GTM 80  
Corner version** p.104

# Ecopalex® GTM

Our range of fan-assisted and ductable,  
air-heating, wood-burning firebox inserts.  
The ideal way to recondition an old,  
open fireplace

# Ecopalex GTM70



## Firebox versions

		€
GTM70 *	802602850	2,160

## Specifications and standard fittings:

- natural convection insert
- inside is in **Thermofix**\* with a cast iron base
- it is supplied as standard with two 50 cm flues
- removable door handle
- optional kits offer the possibility of front hot air delivery or of ducting the hot air to other rooms.
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- for optimal efficiency, an automatic baffle increases the draught when the door is open and reduces it when it is closed
- the combustion air can be taken directly from outdoors

## Optional

A1 - Front fan kit for GTM70	892009540	160
A2 - Centrifugal kit for GTM70	892009550	505
B1 - Wall-mounted speed variator	892004370	105
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
B4 - Digital control unit in polycarbonate	002520014	200
C1 - Ventilation kit inside the hood for GTM70	892009570	160
Finishing frame for plasterboard	892008220	135
Frame for GTM70	892009580	140
Supporting framework (63x38 cm)	892002910	210

## Complementary accessories starting on page 163

Shape remote control	892009020	
----------------------	-----------	--



## Technical features

### GTM70

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>62x50x50 - 102</b>
Heat input <b>kW</b>	<b>10.2</b>
Nominal Heat Output <b>kW</b>	<b>9</b>
Efficiency %	<b>88.2</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>22 - 22</b>
Recommended fuel quantity <b>kg/h</b>	<b>2.5</b>
Flue gas outlet <b>cm</b>	<b>15</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecopalex GTM80



## Firebox versions

		€
GTM80 *	802602860	2,460

## Specifications and standard fittings:

- natural convection insert
- inside is in **Thermofix**\* with a cast iron base
- it is supplied as standard with two 50 cm flues
- removable door handle
- optional kits offer the possibility of front hot air delivery or of ducting the hot air to other rooms.
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- for optimal efficiency, an automatic baffle increases the draught when the door is open and reduces it when it is closed
- the combustion air can be taken directly from outdoors

## Optional

A1 - Front fan kit for GTM80	892009541	170
A2 - Centrifugal kit for GTM80	892009551	515
B1 - Wall-mounted speed variator	892004370	105
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
B4 - Digital control unit in polycarbonate	002520014	200
C1 - Ventilation kit inside the hood for GTM80	892009571	170
Finishing frame for plasterboard	892008280	155
Frame for GTM80	892009581	150
Supporting framework (63x38 cm)	892002910	210

## Complementary accessories starting on page 163

Shape remote control	892009020	
----------------------	-----------	--



## Technical features GTM80

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>76x52x56 - 130</b>
Heat input <b>kW</b>	<b>14.3</b>
Nominal Heat Output <b>kW</b>	<b>12.4</b>
Efficiency %	<b>86.9</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>14 - 26</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>18</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecopalex GTM80 Corner



Firebox versions		€
GTM 80L *	802602910	2,760
GTM 80R	802602900	2,760

## Specifications and standard fittings:

- natural convection insert
- ceramic glass door on two sides
- inside is in **Thermofix**® with a cast iron base
- it is supplied as standard with two 50 cm flues
- removable door handle
- optional kits offer the possibility of front hot air delivery or of ducting the hot air to other rooms.
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- for optimal efficiency, an automatic baffle increases the draught when the door is open and reduces it when it is closed
- the combustion air can be taken directly from outdoors

**R:** version with glass corner on the right

**L:** version with glass corner on the left

## Optional

A1 - Front fan kit for GTM80 R/L	892009810	170
A2 - Centrifugal kit for GTM80 R/L	892009800	515
B1 - Wall-mounted speed variator	892004370	105
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
C1 - Ventilation kit inside the hood for GTM80 R/L	892009790	170
Finishing frame for plasterboard GTM80L/R	892009850	225
Frame for GTM80 R/L	892009591	180
Supporting framework (63x38 cm)	892002910	210

## Complementary accessories starting on page 163

Shape remote control	892009020
----------------------	-----------



Technical features	GTM 80L	GTM 80R
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>76x52x56 - 130</b>	<b>76x52x56 - 130</b>
Heat input <b>kW</b>	<b>14.3</b>	<b>14.3</b>
Nominal Heat Output <b>kW</b>	<b>12.4</b>	<b>12.4</b>
Efficiency %	<b>86.9</b>	<b>86.9</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>14 - 26</b>	<b>14 - 26</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>18</b>	<b>18</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecopalex GTM90



## Firebox versions

		€
GTM90 *	802602876	2,760

## Specifications and standard fittings:

- natural convection insert
- inside is in **Thermofix**\* with a cast iron base
- it is supplied as standard with two 50 cm flues
- removable door handle
- optional kits offer the possibility of front hot air delivery or of ducting the hot air to other rooms.
- primary air regulation and glass air wash
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- for optimal efficiency, an automatic baffle increases the draught when the door is open and reduces it when it is closed
- the combustion air can be taken directly from outdoors

## Optional

A1 - Front fan kit for GTM90	892009542	180
A2 - Centrifugal kit for GTM90	892009552	525
B1 - Wall-mounted speed variator	892004370	105
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
B4 - Digital control unit in polycarbonate	002520014	200
C1 - Ventilation kit inside the hood for GTM90	892009572	180
Finishing frame for plasterboard	892008310	175
Frame for GTM90	892009582	160
Supporting framework (85x45 cm)	892009700	315

## Complementary accessories starting on page 163

Shape remote control	892009020	
----------------------	-----------	--



## Technical features GTM90

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>83x59x63 - 167</b>
Heat input <b>kW</b>	<b>16</b>
Nominal Heat Output <b>kW</b>	<b>13.8</b>
Efficiency %	<b>86.4</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>14 - 14</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>20</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Bricks cladding for GTM 80 Corner version



## Version

Bricks cladding*	892010120	1.400
WxDxH: 102x58x155 cm		


## Characteristics

Bricks turns a firebox into a heat accumulation stove. Hot Stone by Bricks accumulates heat and then releases it gradually. The basic version of the Hot Stone modules is white but they can be decorated by customers as they please to adapt the stove to their individual style and to the interior decor of the room. Additional levels can be paired with the basic version.

**The firebox and the pedestal are not supplied with the cladding.**

## Optional

Set of extra modules	892010130	400
WxDxH: 102x58x29 cm		

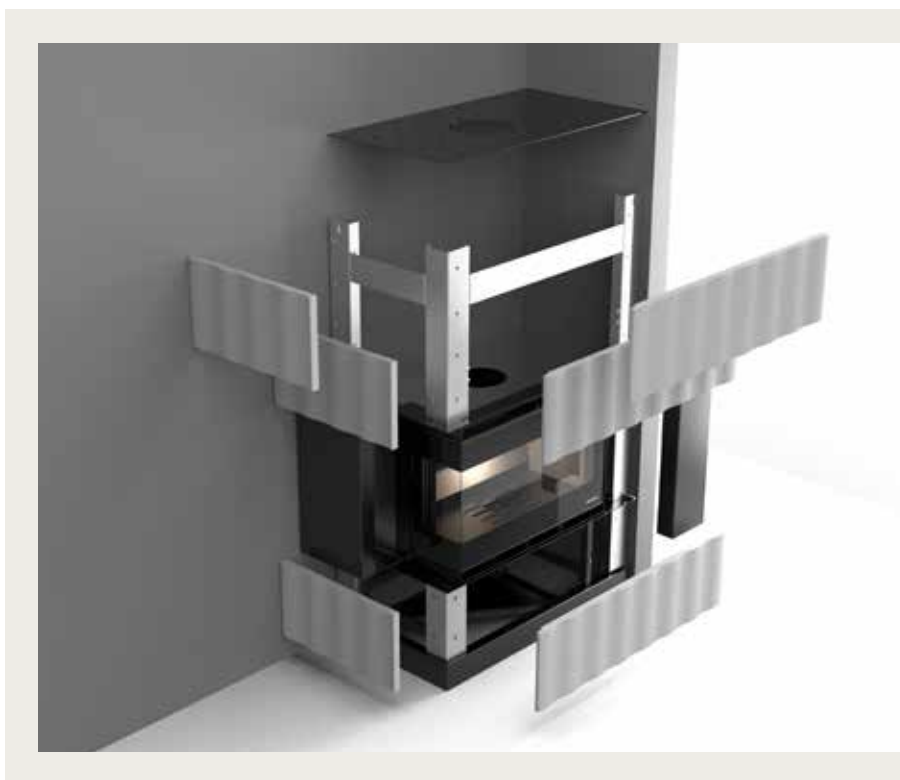

## Modularity

Bricks modules are designed for quick, user-friendly and dry installation that doesn't require specific skills.

The flexibility of the modules allows them to adapt to various fireplace configurations.

## Reversible, shaped modules

To ensure a perfect match at the corners, all Hot Stone modules are reversible and shaped. This ensures an impeccable finish and easy installation with no need for complex masonry work.



ECOPALEX®

GTM80 corner version firebox with Bricks cladding and set of extra modules



Firebox Ecomonoblocco WTX 80 with custom-made cladding

**Ecomonoblocco WTX 70 Front Version** p.108  
**Ecomonoblocco WTX 70 Corner** p.110  
**Ecomonoblocco WTX 80 Front Version** p.112  
**Ecomonoblocco WTX 80 Corner** p.114  
**Ecomonoblocco WTX 90 Front Version** p.116  
**Ecomonoblocco WTX 90 Corner** p.118

**Ecomonoblocco EL 64 Front Version** p.120  
**Ecomonoblocco EL 64 Corner** p.120  
**Ecomonoblocco EL 78 Front Version** p.121  
**Ecomonoblocco EL 78 Corner** p.121  
**Ecomonoblocco EL 86 Front Version** p.122  
**Ecomonoblocco EL 86 Corner** p.122  
**Ecomonoblocco MX64 Front Version** p.123

**Ecomonoblocco MX64 Corner** p.124  
**Ecomonoblocco MX78 Front Version** p.125  
**Ecomonoblocco MX78 Corner** p.126  
**Ecomonoblocco MX86 Front Version** p.127  
**Ecomonoblocco MX86 Corner** p.128  
**Ecomonoblocco MX25:9 Front Version** p.129  
**Ecomonoblocco S66 3D** p.130  
**Ecomonoblocco EM 16:9 3D** p.131  
**Ecomonoblocco EM 16:9 Front Version** p.132  
**Ecomonoblocco WT 16:9 Front Version** p.133  
**Ecomonoblocco WT 16:9 Double sides** p.134  
**Ecomonoblocco WT 16:9 3D** p.135  
**Ecomonoblocco WT60 3D** p.136

# Ecomonoblocco

Our range of fan-assisted and ductable,  
air-heating, wood-burning fireboxes  
that can heat entire homes with all the beauty  
of a visible fire

# Ecomonoblocco WTX 70 Front version



## Firebox versions

		€
WTX 70F N15 *	<b>802513600</b>	<b>4,270</b>

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted by 40° for cleaning purposes
- heats by natural convection and radiation
- n.2 adjustable vents with connectors and flexible pipe extension
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- the combustion air can be taken directly from outdoors

## Optional

A - Radial fan kit for WTX	<b>892009780</b>	<b>290</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
C1 - Kit of 2 outlet vents with tubes	<b>892003950</b>	<b>185</b>
Finishing frame for plasterboard	<b>892009190</b>	<b>180</b>
Set of castors	<b>892009260</b>	<b>105</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>
---------------------------	------------------



## Product Details



**Ash pan**

Convenient removable drawer, for containing and collecting ashes.



**External ducting of primary air**

For greater comfort and system efficiency; this method prevents cold air from entering the room and creating negative pressure.



**Heating by radiation and natural convection**

Heat distributed evenly thanks to the mix of two heating principles: radiation and natural convection.



**Ductable air heating**

The ventilation kit allows you to quickly spread hot air into multiple rooms.



**Firebox made of Thermofix<sup>®</sup>**

Precious material, based on refractory clays and fused cements, ensures superior performance, comfort, savings and design.


# Ecomonoblocco WTX 70 Front version

## Technical features

Nominal Heat Output <b>kW</b>	<b>14.7</b>
Heat input <b>kW</b>	<b>17.2</b>
Efficiency <b>%</b>	<b>85.2</b>
Temperatura fumi <b>°C</b>	<b>229.2</b>
Massa fumi <b>g/s</b>	<b>10.3</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>598</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>12</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>26</b>
Recommended fuel quantity <b>kg/h</b>	<b>4</b>
Flue gas outlet <b>cm</b>	<b>20</b>
Tiraggio canna fumaria <b>Pa</b>	<b>12(±2)</b>
Tiraggio minimo per dimensionamento camino <b>Pa</b>	<b>0</b>
Energy Rating	<b>A+</b>


## Safety distances (cm)

**X1 = 100**  
**X2 = 50**  
**Y1 = 100**  
**Y2 = 100**  
**Z = 75**

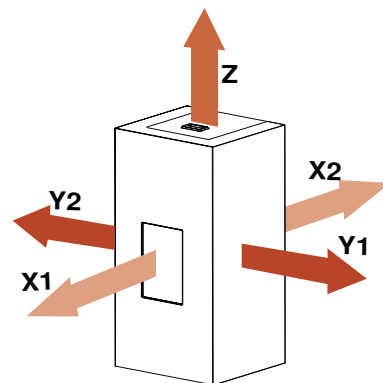


## Dimensions WxDxH cm - Weight kg

**77x61x171 - 268**

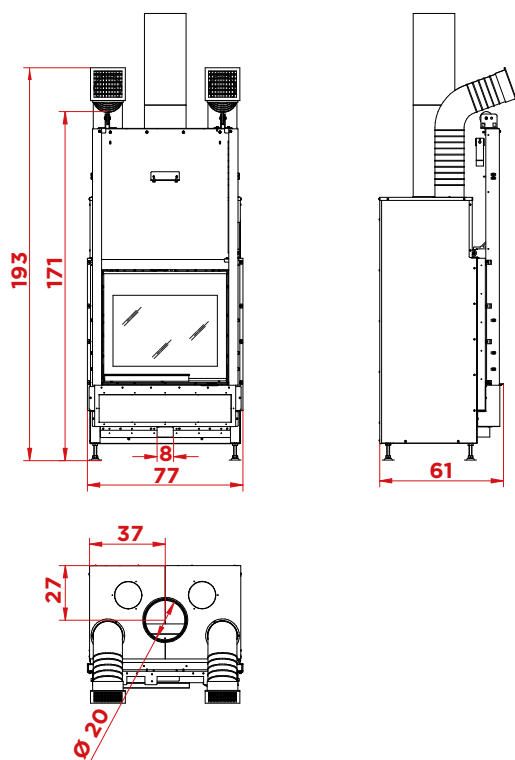

## Packaging (cm)

**B = 71**  
**T = 112**  
**H = 193**  
**Weight = 312 Kg**



# Ecomonoblocco WTX 70 Corner



## Firebox versions

		€
WTX 70L N15 *	<b>802533600</b>	<b>4,770</b>
WTX 70R N15	<b>802523600</b>	<b>4,770</b>

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- corner door with two coupled glasses
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted for cleaning purposes
- heats by natural convection and radiation
- n.2 adjustable vents with connectors and flexible pipe extension
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- the combustion air can be taken directly from outdoors

**N:** natural version; it is possible to combine the optional ventilation kit.

## Optional

A - Radial fan kit for WTX	<b>892009780</b>	<b>290</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
C1 - Kit of 2 outlet vents with tubes	<b>892003950</b>	<b>185</b>
Finishing frame for plasterboard R/L	<b>892009191</b>	<b>270</b>
Set of castors	<b>892009260</b>	<b>105</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>
---------------------------	------------------



## Product Details



**Ash pan**

Convenient removable drawer, for containing and collecting ashes.



**External ducting of primary air**

For greater comfort and system efficiency; this method prevents cold air from entering the room and creating negative pressure.



**Heating by radiation and natural convection**

Heat distributed evenly thanks to the mix of two heating principles: radiation and natural convection.



**Ductable air heating**

The ventilation kit allows you to quickly spread hot air into multiple rooms.



**Firebox made of Thermofix<sup>®</sup>**


Precious material, based on refractory clays and fused cements, ensures superior performance, comfort, savings and design.

# Ecomonoblocco WTX 70 Corner

Technical features	WTX 70L N15	WTX 70R N15
Nominal Heat Output <b>kW</b>	<b>14.7</b>	
Heat input <b>kW</b>	<b>17.2</b>	
Efficiency %	<b>85.2</b>	
Temperatura fumi <b>°C</b>	<b>229.2</b>	
Massa fumi <b>g/s</b>	<b>10.3</b>	
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>598</b>	
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>12</b>	
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>26</b>	
Recommended fuel quantity <b>kg/h</b>	<b>4</b>	
Flue gas outlet <b>cm</b>	<b>20</b>	
Tiraggio canna fumaria <b>Pa</b>	<b>12(±2)</b>	
Tiraggio minimo per dimensionamento camino <b>Pa</b>	<b>0</b>	
Energy Rating	<b>A+</b>	<b>A+</b>


## Safety distances (cm)

**X1 = 100**  
**X2 = 50**  
**Y1 = 100**  
**Y2 = 100**  
**Z = 75**

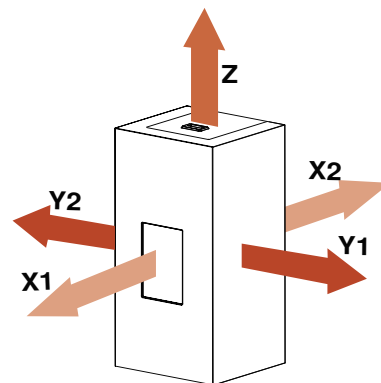


## Dimensions WxDxH cm - Weight kg

**87x61x171 - 307**

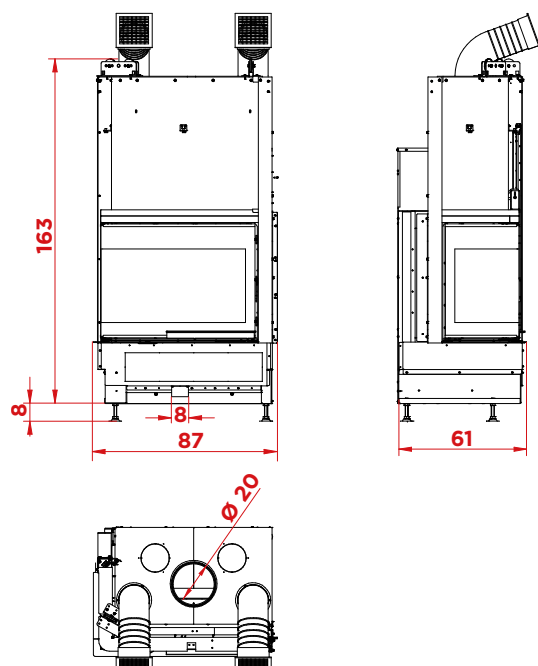

## Packaging (cm)

**B = 71**  
**T = 112**  
**H = 193**  
**Weight = 350 Kg**



# Ecomonoblocco WTX 80 Front version



## Firebox versions

		€
WTX 80F N18 *	<b>802513900</b>	<b>4,440</b>

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted by 40° for cleaning purposes
- heats by natural convection and radiation
- n.2 adjustable vents with connectors and flexible pipe extension
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- the combustion air can be taken directly from outdoors

**N:** natural version; it is possible to combine the optional ventilation kit.

## Optional

A - Radial fan kit for WTX	<b>892009780</b>	<b>290</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
C1 - Kit of 2 outlet vents with tubes	<b>892003950</b>	<b>185</b>
Finishing frame for plasterboard	<b>892008960</b>	<b>200</b>
Set of castors	<b>892009260</b>	<b>105</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>
---------------------------	------------------



## Product Details



**Ash pan**

Convenient removable drawer, for containing and collecting ashes.



**External ducting of primary air**

For greater comfort and system efficiency; this method prevents cold air from entering the room and creating negative pressure.



**Heating by radiation and natural convection**

Heat distributed evenly thanks to the mix of two heating principles: radiation and natural convection.



**Ductable air heating**

The ventilation kit allows you to quickly spread hot air into multiple rooms.



**Firebox made of Thermofix<sup>®</sup>**

Precious material, based on refractory clays and fused cements, ensures superior performance, comfort, savings and design.


# Ecomonoblocco WTX 80 Front version

## Technical features

Nominal Heat Output <b>kW</b>	<b>17.8</b>
Heat input <b>kW</b>	<b>20.5</b>
Efficiency %	<b>86.9</b>
Temperatura fumi <b>°C</b>	<b>199.1</b>
Massa fumi <b>g/s</b>	<b>12.4</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>592</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>13</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>29</b>
Recommended fuel quantity <b>kg/h</b>	<b>4.5</b>
Flue gas outlet <b>cm</b>	<b>20</b>
Tiraggio canna fumaria <b>Pa</b>	<b>12(±2)</b>
Tiraggio minimo per dimensionamento camino <b>Pa</b>	<b>0</b>
Energy Rating	<b>A+</b>


## Safety distances (cm)

**X1 = 100**  
**X2 = 50**  
**Y1 = 100**  
**Y2 = 100**  
**Z = 100**

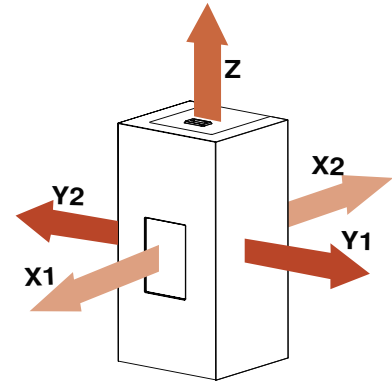


## Dimensions WxDxH cm - Weight kg

**90x61x171 - 295**

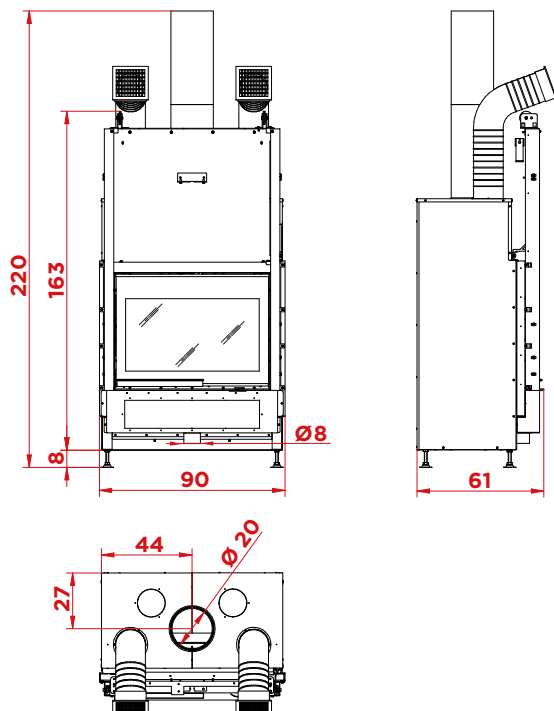

## Packaging (cm)

**B = 71**  
**T = 112**  
**H = 193**  
**Weight = 312 Kg**



# Ecomonoblocco WTX 80 Corner



## Firebox versions

		€
WTX 80L N18	<b>802533900</b>	<b>4,970</b>
WTX 80R N18*	<b>802523900</b>	<b>4,970</b>

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- corner door with two coupled glasses
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted for cleaning purposes
- heats by natural convection and radiation
- n.2 adjustable vents with connectors and flexible pipe extension
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- the combustion air can be taken directly from outdoors

**N:** natural version; it is possible to combine the optional ventilation kit.

## Optional

A - Radial fan kit for WTX	<b>892009780</b>	<b>290</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
C1 - Kit of 2 outlet vents with tubes	<b>892003950</b>	<b>185</b>
Finishing frame for plasterboard R/L	<b>892008961</b>	<b>290</b>
Set of castors	<b>892009260</b>	<b>105</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>
---------------------------	------------------



## Product Details



### Ash pan

Convenient removable drawer, for containing and collecting ashes.



### External ducting of primary air

For greater comfort and system efficiency; this method prevents cold air from entering the room and creating negative pressure.



### Heating by radiation and natural convection

Heat distributed evenly thanks to the mix of two heating principles: radiation and natural convection.



### Ductable air heating

The ventilation kit allows you to quickly spread hot air into multiple rooms.



### Firebox made of Thermofix<sup>®</sup>


Precious material, based on refractory clays and fused cements, ensures superior performance, comfort, savings and design.

# Ecomonoblocco WTX 80 Corner

Technical features	WTX 80L N18	WTX 80R N18
Nominal Heat Output <b>kW</b>		<b>17.8</b>
Heat input <b>kW</b>		<b>20.5</b>
Efficiency <b>%</b>		<b>86.9</b>
Temperatura fumi <b>°C</b>		<b>199.1</b>
Massa fumi <b>g/s</b>		<b>12.4</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>		<b>592</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>		<b>13</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>		<b>29</b>
Recommended fuel quantity <b>kg/h</b>		<b>4.5</b>
Flue gas outlet <b>cm</b>		<b>20</b>
Tiraggio canna fumaria <b>Pa</b>		<b>12(±2)</b>
Tiraggio minimo per dimensionamento camino <b>Pa</b>		<b>0</b>
Energy Rating	<b>A+</b>	<b>A+</b>


## Safety distances (cm)

**X1 = 100**  
**X2 = 50**  
**Y1 = 100**  
**Y2 = 100**  
**Z = 100**

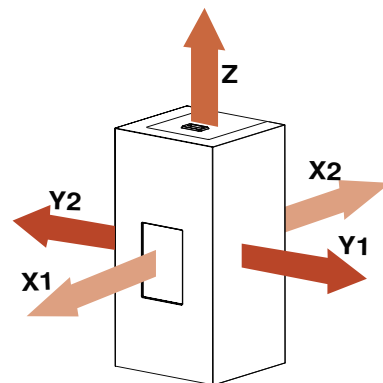


## Dimensions WxDxH cm - Weight kg

**100x61x171 - 337**

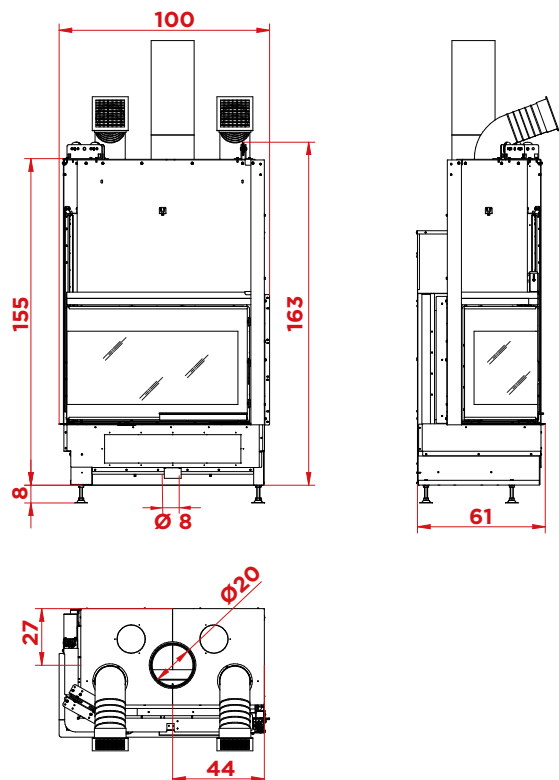

## Packaging (cm)

**B = 71**  
**T = 112**  
**H = 193**  
**Weight = 350 Kg**



# Ecomonoblocco WTX 90 Front version



## Firebox versions

		€
WTX 90F N19 *	802514200	5,060

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted by 40° for cleaning purposes
- heats by natural convection and radiation
- n.2 adjustable vents with connectors and flexible pipe extension
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- the combustion air can be taken directly from outdoors

**N:** natural version; it is possible to combine the optional ventilation kit.

## Optional

A - Radial fan kit for WTX	892009780	290
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
C1 - Kit of 2 outlet vents with tubes	892003950	185
Finishing frame for plasterboard	892009210	220
Set of castors	892009260	105

## Complementary accessories starting on page 163

Cast iron firewood holder	892009140
---------------------------	-----------



## Product Details



**Ash pan**

Convenient removable drawer, for containing and collecting ashes.



**External ducting of primary air**

For greater comfort and system efficiency; this method prevents cold air from entering the room and creating negative pressure.



**Heating by radiation and natural convection**

Heat distributed evenly thanks to the mix of two heating principles: radiation and natural convection.



**Ductable air heating**

The ventilation kit allows you to quickly spread hot air into multiple rooms.



**Firebox made of Thermofix<sup>®</sup>**

Precious material, based on refractory clays and fused cements, ensures superior performance, comfort, savings and design.


# Ecomonoblocco WTX 90 Front version

## Technical features

Nominal Heat Output <b>kW</b>	<b>19.1</b>
Heat input <b>kW</b>	<b>22.3</b>
Efficiency <b>%</b>	<b>85.7</b>
Temperatura fumi <b>°C</b>	<b>233.6</b>
Massa fumi <b>g/s</b>	<b>12.1</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>420</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>14</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>19</b>
Recommended fuel quantity <b>kg/h</b>	<b>5.5</b>
Flue gas outlet <b>cm</b>	<b>20</b>
Tiraggio canna fumaria <b>Pa</b>	<b>12(±2)</b>
Tiraggio minimo per dimensionamento camino <b>Pa</b>	<b>0</b>
Energy Rating	<b>A+</b>


## Safety distances (cm)

**X1 = 150**  
**X2 = 50**  
**Y1 = 150**  
**Y2 = 150**  
**Z = 100**

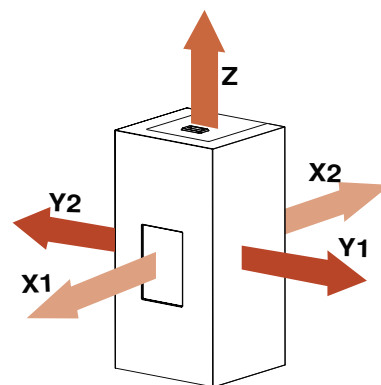


## Dimensions WxDxH cm - Weight kg

**103x61x172 - 330**

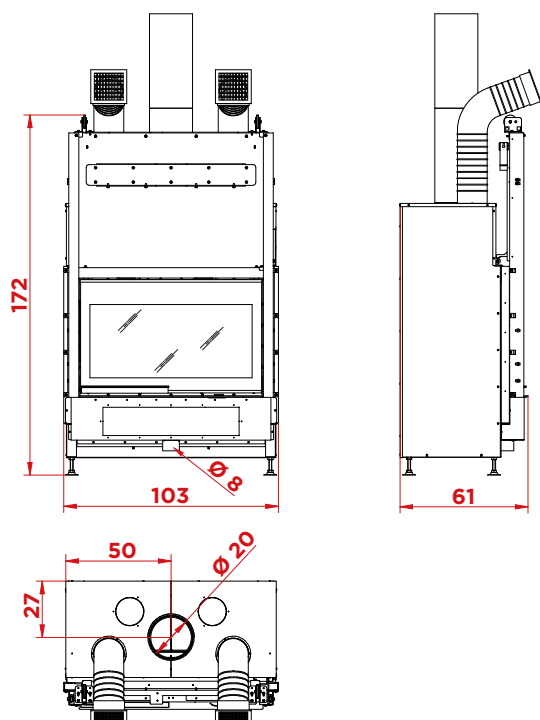

## Packaging (cm)

**B = 129**  
**T = 75**  
**H = 193**  
**Weight = 340 Kg**



# Ecomonoblocco WTX 90 Corner



## Firebox versions

		€
WTX 90L N19 *	<b>802534200</b>	<b>5,660</b>
WTX 90R N19	<b>802524200</b>	<b>5,660</b>

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- corner door with two coupled glasses
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted for cleaning purposes
- heats by natural convection and radiation
- n.2 adjustable vents with connectors and flexible pipe extension
- removable ash pan
- standard 1 meter smoking pipe (2x50cm)
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- the combustion air can be taken directly from outdoors

**N:** natural version; it is possible to combine the optional ventilation kit.

## Optional

A - Radial fan kit for WTX	<b>892009780</b>	<b>290</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
C1 - Kit of 2 outlet vents with tubes	<b>892003950</b>	<b>185</b>
Finishing frame for plasterboard R/L	<b>892009211</b>	<b>310</b>
Set of castors	<b>892009260</b>	<b>105</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>
---------------------------	------------------



## Product Details



### Ash pan

Convenient removable drawer, for containing and collecting ashes.



### External ducting of primary air

For greater comfort and system efficiency; this method prevents cold air from entering the room and creating negative pressure.



### Heating by radiation and natural convection

Heat distributed evenly thanks to the mix of two heating principles: radiation and natural convection.



### Ductable air heating

The ventilation kit allows you to quickly spread hot air into multiple rooms.



### Firebox made of Thermofix<sup>®</sup>


Precious material, based on refractory clays and fused cements, ensures superior performance, comfort, savings and design.

# Ecomonoblocco WTX 90 Corner

Technical features	WTX 90L N19	WTX 90R N19
Nominal Heat Output <b>kW</b>		<b>19.1</b>
Heat input <b>kW</b>		<b>22.3</b>
Efficiency <b>%</b>		<b>85.7</b>
Temperatura fumi <b>°C</b>		<b>233.6</b>
Massa fumi <b>g/s</b>		<b>12.1</b>
Emiss. CO (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>		<b>420</b>
Dust (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>		<b>14</b>
OGC (13%O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>		<b>19</b>
Recommended fuel quantity <b>kg/h</b>		<b>5.5</b>
Flue gas outlet <b>cm</b>		<b>20</b>
Tiraggio canna fumaria <b>Pa</b>		<b>12(±2)</b>
Tiraggio minimo per dimensionamento camino <b>Pa</b>		<b>0</b>
Energy Rating	<b>A+</b>	<b>A+</b>


## Safety distances (cm)

**X1 = 150**  
**X2 = 50**  
**Y1 = 150**  
**Y2 = 150**  
**Z = 100**

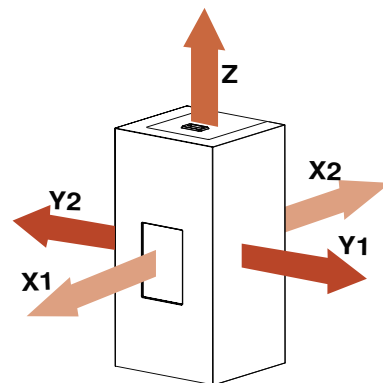


## Dimensions WxDxH cm - Weight kg

**113x61x172 - 375**

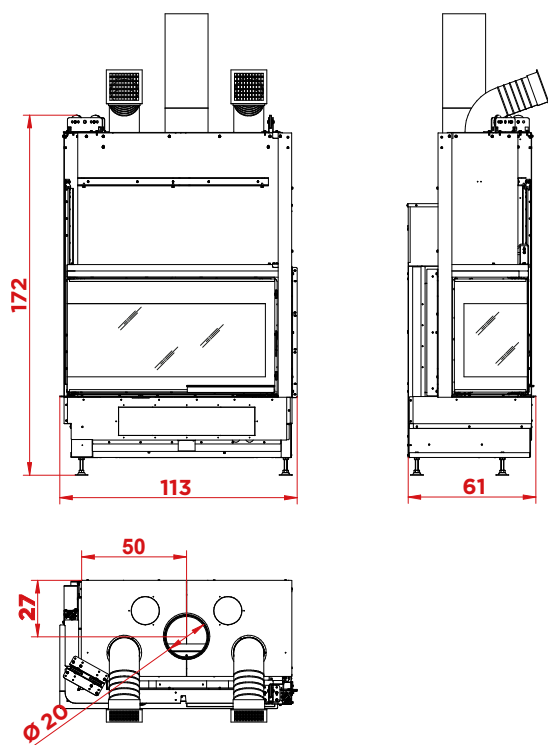

## Packaging (cm)

**B = 129**  
**T = 75**  
**H = 193**  
**Weight = 398 Kg**



# Ecomonoblocco EL 64 Front version



Firebox versions		€
EL 64 Frontal O <sub>2</sub> Ring *	<b>802511381</b>	<b>3,370</b>
<b>Optional</b>		
Box for wall installation for digital control unit	<b>002540064</b>	<b>35</b>
Cast iron firewood holder	<b>892009140</b>	<b>70</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>
Finishing frame for plasterboard ecomonoblocco 64	<b>892005600</b>	<b>115</b>
Iron firewood holder	<b>892502130</b>	<b>65</b>
Primary air conveyor kit	<b>892004770</b>	<b>105</b>

## Specifications and standard fittings:

- fully-opening ceramic glass door
- n.2 adjustable vents with connectors and flexible pipe extension
- cast iron firebox
- automatically-opening smoke regulation damper
- the version with **O<sub>2</sub>ring** it's equipped with technology to reduce emissions



# Ecomonoblocco EL 64 Corner



Firebox versions		€
EL 64 Left O <sub>2</sub> Ring	<b>802531381</b>	<b>3,480</b>
EL 64 Right O <sub>2</sub> Ring *	<b>802521381</b>	<b>3,480</b>
<b>Optional</b>		
Box for wall installation for digital control unit	<b>002540064</b>	<b>35</b>
Cast iron firewood holder	<b>892009140</b>	<b>70</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>
Iron firewood holder	<b>892502130</b>	<b>65</b>
Primary air conveyor kit	<b>892004770</b>	<b>105</b>

## Specifications and standard fittings:

- ceramic glass door on two sides
- n.2 adjustable vents with connectors and flexible pipe extension
- cast iron firebox
- automatically-opening smoke regulation damper
- the version with **O<sub>2</sub>ring** it's equipped with technology to reduce emissions



Technical features	EL 64 Frontal O <sub>2</sub> Ring	EL 64 Left O <sub>2</sub> Ring	EL 64 Right O <sub>2</sub> Ring
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>77x59x161 - 160</b>	<b>78x59x161 - 160</b>	<b>78x59x161 - 160</b>
Heat input <b>kW</b>	<b>14.2</b>	<b>14.2</b>	<b>14.2</b>
Nominal Heat Output <b>kW</b>	<b>10.8</b>	<b>10.8</b>	<b>10.8</b>
Efficiency %	<b>76.3</b>	<b>76.3</b>	<b>76.3</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>40 - 48</b>	<b>40 - 48</b>	<b>40 - 48</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>	<b>3.5</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>20</b>	<b>20</b>	<b>20</b>
Energy Rating	<b>A</b>	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco EL 78 Front version



Firebox versions		€
EL 78 Frontal O <sub>2</sub> Ring *	<b>802511231</b>	<b>3,470</b>
<b>Optional</b>		
Box for wall installation for digital control unit	<b>002540064</b>	<b>35</b>
Cast iron firewood holder	<b>892009140</b>	<b>70</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>
Finishing frame	<b>892005620</b>	<b>135</b>
Iron firewood holder	<b>892502130</b>	<b>65</b>
Primary air conveyor kit	<b>892004770</b>	<b>105</b>

## Specifications and standard fittings:

- fully-opening ceramic glass door
- n.2 adjustable vents with connectors and flexible pipe extension
- cast iron firebox
- automatically-opening smoke regulation damper
- the version with **O<sub>2</sub>ring** it's equipped with technology to reduce emissions



# Ecomonoblocco EL 78 Corner



Firebox versions		€
EL 78 Left O <sub>2</sub> Ring	<b>802531231</b>	<b>3,590</b>
EL 78 Right O <sub>2</sub> Ring *	<b>802521231</b>	<b>3,590</b>
<b>Optional</b>		
Box for wall installation for digital control unit	<b>002540064</b>	<b>35</b>
Cast iron firewood holder	<b>892009140</b>	<b>70</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>
Iron firewood holder	<b>892502130</b>	<b>65</b>
Primary air conveyor kit	<b>892004770</b>	<b>105</b>

## Specifications and standard fittings:

- ceramic glass door on two sides
- n.2 adjustable vents with connectors and flexible pipe extension
- cast iron firebox
- automatically-opening smoke regulation damper
- the version with **O<sub>2</sub>ring** it's equipped with technology to reduce emissions



Technical features	EL 78 Frontal O <sub>2</sub> Ring	EL 78 Left O <sub>2</sub> Ring	EL 78 Right O <sub>2</sub> Ring
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>88x59x186 - 215</b>	<b>88x59x186 - 215</b>	<b>88x59x186 - 215</b>
Heat input <b>kW</b>	<b>18.6</b>	<b>18.6</b>	<b>18.6</b>
Nominal Heat Output <b>kW</b>	<b>14.4</b>	<b>14.4</b>	<b>14.4</b>
Efficiency %	<b>77.4</b>	<b>77.4</b>	<b>77.4</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>30 - 70</b>	<b>30 - 70</b>	<b>30 - 70</b>
Recommended fuel quantity <b>kg/h</b>	<b>4.5</b>	<b>4.5</b>	<b>4.5</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A</b>	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco EL 86 Front version



Firebox versions		€
EL 86 Frontal O <sub>2</sub> Ring *	<b>802511531</b>	<b>4,130</b>
<b>Optional</b>		
Box for wall installation for digital control unit	<b>002540064</b>	<b>35</b>
Cast iron firewood holder	<b>892009140</b>	<b>70</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>
Finishing frame for plasterboard	<b>892005630</b>	<b>155</b>
Primary air conveyor kit	<b>892004810</b>	<b>105</b>

## Specifications and standard fittings:

- fully-opening ceramic glass door
- n.2 adjustable vents with connectors and flexible pipe extension
- cast iron firebox
- automatically-opening smoke regulation damper
- the version with **O<sub>2</sub>ring** it's equipped with technology to reduce emissions



# Ecomonoblocco EL 86 Corner



Firebox versions		€
EL 86 Left O <sub>2</sub> Ring	<b>802531531</b>	<b>4,310</b>
EL 86 Right O <sub>2</sub> Ring *	<b>802521531</b>	<b>4,310</b>
<b>Optional</b>		
Box for wall installation for digital control unit	<b>002540064</b>	<b>35</b>
Cast iron firewood holder	<b>892009140</b>	<b>70</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>
Iron firewood holder	<b>892502130</b>	<b>65</b>
Primary air conveyor kit	<b>892004810</b>	<b>105</b>

## Specifications and standard fittings:

- ceramic glass door on two sides
- n.2 adjustable vents with connectors and flexible pipe extension
- cast iron firebox
- automatically-opening smoke regulation damper
- the version with **O<sub>2</sub>ring** it's equipped with technology to reduce emissions



Technical features	EL 86 Frontal O <sub>2</sub> Ring	EL 86 Left O <sub>2</sub> Ring	EL 86 Right O <sub>2</sub> Ring
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>103x72x187 - 230</b>	<b>104x72x187 - 230</b>	<b>104x72x187 - 230</b>
Heat input <b>kW</b>	<b>21.1</b>	<b>21.1</b>	<b>21.1</b>
Nominal Heat Output <b>kW</b>	<b>16</b>	<b>16</b>	<b>16</b>
Efficiency %	<b>75.5</b>	<b>75.5</b>	<b>75.5</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>38 - 53</b>	<b>38 - 53</b>	<b>38 - 53</b>
Recommended fuel quantity <b>kg/h</b>	<b>5</b>	<b>5</b>	<b>5</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A</b>	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 64 Front version



## Firebox versions

		€
MX 64 F *	802512400	3,480

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- sliding door
- glass self-cleaning system which guarantees an optimal view of the flame and allows to reduce the frequency of manual cleaning
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

## Optional

A - Centrifugal kit for MX	892009640	390
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
Finishing frame for plasterboard	892005601	115
Wall box for digital control unit	892009240	35

## Complementary accessories starting on page 163

Cast iron firewood holder	892009140	
---------------------------	-----------	--



Technical features	MX 64 F
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>74x55x145 - 160</b>
Heat input <b>kW</b>	<b>14.3</b>
Nominal Heat Output <b>kW</b>	<b>11</b>
Efficiency %	<b>77.1</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>27 - 41</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>20</b>
Energy Rating	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 64 Corner



Firebox versions		€
MX 64 L	<b>802532400</b>	<b>3,800</b>
MX 64 R *	<b>802522400</b>	<b>3,800</b>

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- sliding door
- glass self-cleaning system which guarantees an optimal view of the flame and allows to reduce the frequency of manual cleaning
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

**R:** version with glass corner on the right

**L:** version with glass corner on the left

## Optional

A - Centrifugal kit for MX	<b>892009640</b>	<b>390</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
Wall box for digital control unit	<b>892009240</b>	<b>35</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>	
---------------------------	------------------	--



Technical features	MX 64 L	MX 64 R
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>74x55x145 - 160</b>	<b>74x55x145 - 160</b>
Heat input <b>kW</b>	<b>14.3</b>	<b>14.3</b>
Nominal Heat Output <b>kW</b>	<b>11</b>	<b>11</b>
Efficiency %	<b>77.1</b>	<b>77.1</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>27 - 41</b>	<b>27 - 41</b>
Recommended fuel quantity <b>kg/h</b>	<b>3.5</b>	<b>3.5</b>
Flue gas outlet <b>cm</b>	<b>20</b>	<b>20</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 78 Front version



## Firebox versions

		€
MX 78 F *	802512410	3,580

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- sliding door
- glass self-cleaning system which guarantees an optimal view of the flame and allows to reduce the frequency of manual cleaning
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

## Optional

A - Centrifugal kit for MX	892009640	390
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
Finishing frame for plasterboard	892005621	135
Wall box for digital control unit	892009240	35

## Complementary accessories starting on page 163

Cast iron firewood holder	892009140	
---------------------------	-----------	--



Technical features	MX 78 F
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	85x55x165 - 215
Heat input <b>kW</b>	16.7
Nominal Heat Output <b>kW</b>	13
Efficiency %	78
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	26 - 46
Recommended fuel quantity <b>kg/h</b>	4
Flue gas outlet <b>cm</b>	25
Energy Rating	A

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 78 Corner



## Firebox versions

		€
MX 78 L	<b>802532410</b>	<b>3,920</b>
MX 78 R *	<b>802522410</b>	<b>3,920</b>

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- sliding door
- glass self-cleaning system which guarantees an optimal view of the flame and allows to reduce the frequency of manual cleaning
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

**R:** version with glass corner on the right

**L:** version with glass corner on the left

## Optional

A - Centrifugal kit for MX	<b>892009640</b>	<b>390</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
Wall box for digital control unit	<b>892009240</b>	<b>35</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>	
---------------------------	------------------	--



Technical features	MX 78 L	MX 78 R
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>85x55x165 - 215</b>	<b>85x55x165 - 215</b>
Heat input <b>kW</b>	<b>16.7</b>	<b>16.7</b>
Nominal Heat Output <b>kW</b>	<b>13</b>	<b>13</b>
Efficiency %	<b>78</b>	<b>78</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>26 - 46</b>	<b>26 - 46</b>
Recommended fuel quantity <b>kg/h</b>	<b>4</b>	<b>4</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 86 Front version



## Firebox versions

		€
MX 86 F *	802512420	4,240

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- sliding door
- glass self-cleaning system which guarantees an optimal view of the flame and allows to reduce the frequency of manual cleaning
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

## Optional

A - Centrifugal kit for MX	892009640	390
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
Finishing frame for plasterboard	892005631	155
Wall box for digital control unit	892009240	35

## Complementary accessories starting on page 163

Cast iron firewood holder	892009140	
---------------------------	-----------	--



Technical features	MX 86 F
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	100x67x165 - 240
Heat input <b>kW</b>	20.4
Nominal Heat Output <b>kW</b>	16
Efficiency %	78.5
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	24 - 38
Recommended fuel quantity <b>kg/h</b>	5
Flue gas outlet <b>cm</b>	25
Energy Rating	A

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 86 Corner



## Firebox versions

		€
MX 86 L	<b>802532420</b>	<b>4,590</b>
MX 86 R *	<b>802522420</b>	<b>4,590</b>

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- sliding door
- glass self-cleaning system which guarantees an optimal view of the flame and allows to reduce the frequency of manual cleaning
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

**R:** version with glass corner on the right

**L:** version with glass corner on the left

## Optional

A - Centrifugal kit for MX	<b>892009640</b>	<b>390</b>
B2 - Glass control unit	<b>895753560</b>	<b>200</b>
B3 - ET4W control unit	<b>892009590</b>	<b>505</b>
Wall box for digital control unit	<b>892009240</b>	<b>35</b>

## Complementary accessories starting on page 163

Cast iron firewood holder	<b>892009140</b>	
---------------------------	------------------	--



Technical features	MX 86 L	MX 86 R
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>100x67x165 - 240</b>	<b>100x67x165 - 240</b>
Heat input <b>kW</b>	<b>20.4</b>	<b>20.4</b>
Nominal Heat Output <b>kW</b>	<b>16</b>	<b>16</b>
Efficiency %	<b>78.5</b>	<b>78.5</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>24 - 38</b>	<b>24 - 38</b>
Recommended fuel quantity <b>kg/h</b>	<b>5</b>	<b>5</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco MX 25:9 Front version



## Firebox versions

		€
MX 25:9 F *	802510840	4,790

## Specifications and standard fittings:

- panoramic view of the flame with 25:9 aspect ratio glass
- silent, gliding ceramic glass door
- easy to clean because the glass also swings open
- dual Combustion system
- patented **VDF\*** system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors
- firewood holder and adjustable vents

## Optional

A - Centrifugal kit for MX 25:9	892009650	415
B2 - Glass control unit	895753560	200
B3 - ET4W control unit	892009590	505
Finishing frame for plasterboard ecomonoblocco 25:9	892005650	195

## Complementary accessories starting on page 163

Cast iron firewood holder	892009140	
---------------------------	-----------	--



Technical features	MX 25:9 F
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	135x53x154 - 315
Heat input <b>kW</b>	18.3
Nominal Heat Output <b>kW</b>	14.1
Efficiency %	77.1
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	19 - 50
Recommended fuel quantity <b>kg/h</b>	4
Flue gas outlet <b>cm</b>	25
Energy Rating	A

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco S66 3D



## Firebox versions

		€
S66 3D *	802571810	4,630

## Specifications and standard fittings:

- firebox with the base in cast iron and side panels in special refractory cement mix that optimizes combustion and heat radiation
- panoramic view of the fire from three sides
- sliding door
- easy to clean because the two side panes of glass swing open
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF**<sup>®</sup> system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

## NOTES:

the ventilation kit can be installed only if the monobloc is mounted on the extension legs

## Optional

Box for wall installation for digital control unit	002540064	35
Fan kit with built-in digital control	892004490	615



Technical features	S66 3D
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>58x74x159 - 240</b>
Heat input <b>kW</b>	<b>18.1</b>
Nominal Heat Output <b>kW</b>	<b>14.6</b>
Efficiency %	<b>80.8</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>34.3 - 19</b>
Recommended fuel quantity <b>kg/h</b>	<b>4</b>
Flue gas outlet <b>cm</b>	<b>25</b>
Energy Rating	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco EM 16:9 3D



## Firebox versions

		€
EM 16:9 3D *	802572860	5,340

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- panoramic view of the fire from three sides
- sliding door
- easy to clean because the two side panes of glass swing open
- n.2 adjustable vents with connectors and flexible pipe extension
- dual Combustion system
- patented **VDF**<sup>®</sup> system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors

## Optional

Box for wall installation for digital control unit	002540064	35
Fan kit with built-in digit. control	892008010	615

## Complementary accessories starting on page 163

Cast iron firewood holder	892009140	
---------------------------	-----------	--



## Technical features EM 16:9 3D

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	104x63x158 - 325
Heat input <b>kW</b>	26.4
Nominal Heat Output <b>kW</b>	20
Efficiency %	75.9
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	31.5 - 27.1
Recommended fuel quantity <b>kg/h</b>	6.5
Flue gas outlet <b>cm</b>	25
Energy Rating	A

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco EM 16:9 Front version



## Firebox versions

		€
16:9F O <sub>2</sub> Ring *	<b>802512650</b>	<b>4,840</b>

## Specifications and standard fittings:

- panoramic view of the flame with 16:9 aspect ratio glass
- silk-screen printed ceramic glass door that is fully concealed when open
- easy to clean because the glass also swings open
- firebox with cast iron base and Dual Combustion system
- patented **VDF**<sup>®</sup> system for perfect draught management and consequent energy savings
- the combustion air can be taken directly from outdoors
- firewood holder and adjustable vents. The ventilation kit can only be installed if the monobloc is mounted on the extension legs.

## Optional

Fan kit with built-in digital control unit - 680 m <sup>3</sup> /h with leg extension	<b>892003780</b>	<b>615</b>
Finishing frame for plasterboard ecomonoblocco 16:9	<b>892005640</b>	<b>175</b>



## Technical features 16:9F O<sub>2</sub>Ring

Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>103x54x155 - 240</b>
Heat input <b>kW</b>	<b>24.6</b>
Nominal Heat Output <b>kW</b>	<b>19.8</b>
Efficiency %	<b>80.5</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>20.2 - 65.8</b>
Recommended fuel quantity <b>kg/h</b>	<b>5.5</b>
Flue gas outlet <b>cm</b>	<b>25</b>
Energy Rating	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco WT 16:9 Front version



Firebox versions		€
WT 16:9F N12	802572900	5,650
WT 16:9F V12 *	802572950	6,980
WT 16:9F V12 EPlus	802572940	8,300

## Specifications and standard fittings:

- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted by 40° for cleaning purposes
- heats by natural convection and radiation
- dual Combustion system
- removable ash pan
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates
- the combustion air can be taken directly from outdoors
- aesthetic cast iron firewood holder supplied as standard

**N:** natural version

**V:** ventilated version (ET4W technology), with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses

**V EPLUS:** ventilated version, with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses with ET4W technology for the control of combustion, ventilation and motorized door.

## Optional

Elbow adjustable from 0° to 90°	892008980	95
Finishing frame for plasterboard WT16:9	892009230	240
Set of castors	892008970	105
Supporting framework for masonry 16:9f	892009220	340
Wall box for digital control unit	892009240	35

## Complementary accessories starting on page 163

Shape remote control	892009020
----------------------	-----------



Technical features	WT 16:9F N12	WT 16:9F V12
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	116x63x172 - 450	116x63x172 - 450
Heat input <b>kW</b>	14.2	14.2
Nominal Heat Output <b>kW</b>	12.2	12.2
Efficiency %	85.9	85.9
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	28 - 44	28 - 44
Recommended fuel quantity <b>kg/h</b>	3.5	3.5
Flue gas outlet <b>cm</b>	20	20
Energy Rating	A+	A+

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco WT 16:9 Double sides



## Firebox versions

		€
WT 16:9B N13	<b>802540900</b>	<b>7,510</b>
WT 16:9B V13 *	<b>802540910</b>	<b>8,840</b>
WT 16:9B V13 EPlus	<b>802540920</b>	<b>10,160</b>

## Specifications and standard fittings:

- extensive view of the fire with 16:9 aspect ratio glass on two sides
- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- removable ash pan
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates
- the combustion air can be taken directly from outdoors
- aesthetic cast iron firewood holder supplied as standard
- available in different configurations

the price of the finishing frame kit is unitary, two are needed in the double-sided models.

**N:** natural version

**V:** ventilated version (ET4W technology), with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses

**V EPLUS:** ventilated version, with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses with ET4W technology for the control of combustion, ventilation and motorized door.

## Optional

Finishing frame for plasterboard WT16:9	<b>892009230</b>	<b>240</b>
Set of castors	<b>892008970</b>	<b>105</b>
Supporting framework for masonry 16:9B	<b>892009222</b>	<b>410</b>

## Complementary accessories starting on page 163

Shape remote control	<b>892009020</b>
----------------------	------------------



Technical features	WT 16:9B N13	WT 16:9B V13
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>124x65x171 - 428</b>	<b>124x65x171 - 428</b>
Heat input <b>kW</b>	<b>15.9</b>	<b>15.9</b>
Nominal Heat Output <b>kW</b>	<b>13.5</b>	<b>13.5</b>
Efficiency %	<b>85.1</b>	<b>85.1</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>17 - 31</b>	<b>17 - 31</b>
Recommended fuel quantity <b>kg/h</b>	<b>4</b>	<b>4</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco WT 16:9 3D



Firebox versions		€
WT 16:9 3D N12	802572870	7,500
WT 16:9 3D V12	802572880	8,830
WT 16:9 3D V12 EPlus *	802572890	10,150

## Specifications and standard fittings:

- monobloc with panoramic view of the fire on three sides
- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- dual Combustion system
- removable ash pan
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates
- the combustion air can be taken directly from outdoors
- aesthetic cast iron firewood holder supplied as standard
- available in different configurations

**N:** natural version

**V:** ventilated version (ET4W technology), with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses

**V EPLUS:** ventilated version, with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses with ET4W technology for the control of combustion, ventilation and motorized door.

## Optional

Set of castors	892008970	105
Supporting framework for masonry 16:9 3D	892009221	585

## Complementary accessories starting on page 163

Shape remote control	892009020	
----------------------	-----------	--



Technical features	WT 16:9 3D N12	WT 16:9 3D V12
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	108x71x164 - 450	108x71x164 - 450
Heat input <b>kW</b>	14.6	14.6
Nominal Heat Output <b>kW</b>	12.5	12.5
Efficiency %	85.4	85.4
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	20 - 70	20 - 70
Recommended fuel quantity <b>kg/h</b>	3.5	3.5
Flue gas outlet <b>cm</b>	20	20
Energy Rating	A+	A+

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Ecomonoblocco WT 60 3D



Firebox versions		€
WT 60 3D N16	<b>802572960</b>	<b>7,500</b>
WT 60 3D V16	<b>802572970</b>	<b>8,830</b>
WT 60 3D V16 EPlus *	<b>802572980</b>	<b>10,150</b>

## Specifications and standard fittings:

- monobloc with panoramic view of the fire on three sides
- firebox made of **Thermofix**<sup>®</sup>
- sturdy sliding door system that makes the door glide smoothly open
- dual Combustion system
- removable ash pan
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- integral **O<sub>2</sub>Ring** technology reduces production of harmful particulates
- the combustion air can be taken directly from outdoors
- aesthetic cast iron firewood holder supplied as standard

**N:** natural version

**V:** ventilated version (ET4W technology), with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses

**V EPLUS:** ventilated version, with ventilation hood, radial fan with control unit and 4 adjustable vents with flexible hoses with ET4W technology for the control of combustion, ventilation and motorized door.

## Optional

Set of castors	<b>892009320</b>	<b>135</b>
Supporting framework for masonry 60 3D	<b>892009450</b>	<b>1,500</b>

## Complementary accessories starting on page 163

Shape remote control	<b>892009020</b>
----------------------	------------------



Technical features	WT 60 3D N16	WT 60 3D V16
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>68x125x163 - 460</b>	<b>68x125x163 - 460</b>
Heat input <b>kW</b>	<b>21.2</b>	<b>21.2</b>
Nominal Heat Output <b>kW</b>	<b>16.7</b>	<b>16.7</b>
Efficiency %	<b>78.7</b>	<b>78.7</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>29 - 49</b>	<b>29 - 49</b>
Recommended fuel quantity <b>kg/h</b>	<b>5</b>	<b>5</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A</b>	<b>A</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



ECOMONBLOCCO

Firebox Ecomonblocco WT 60 3D with Kos cladding



**Firebox Termopalex HWT S86 with Trieste cladding**

**Termopalex HWT S78 front** p.140

**Termopalex HWT S86 front** p.141

# Termopalex

Our range of hydronic, wood-burning fireboxes:  
real heating systems that offer the allure  
of a visible fire

# Termopalex HWT S78 Front



## Firebox versions

		€
HWT S78F	<b>802712580</b>	<b>6,650</b>
HWT S78F FASTL	<b>802732590</b>	<b>7,950</b>
HWT S78F FASTL DHW	<b>802732600</b>	<b>8,230</b>
HWT S78F FASTR	<b>802712590</b>	<b>7,950</b>
HWT S78F FASTR DHW *	<b>802712600</b>	<b>8,230</b>

## Specifications and standard fittings:

- central heating firebox with a steel open vented vessel
- firebox made of **Thermofix**
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted by 40° for cleaning purposes
- stainless steel open expansion vessel
- innovative 16-tubes heat exchanger with turbulators
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- predisposition for the connection of the external air intake at the bottom or at the side
- aesthetic cast iron firewood holder supplied as standard

**FAST:** equipped as standard with hydraulic separation system (two circulation pumps and an heat exchanger for system separation) steel open vented vessel and a digital thermoregulator

**FAST DHW:** equipped as standard with hydraulic separation system with production of DHW (two circulation pumps, an heat exchanger for system separation and production of DHW, an anti-scald valve) steel open vented vessel and a digital thermoregulator

**FASTR:** hydraulic unit mounted on the right

**FASTL:** hydraulic unit mounted on the left

## Optional

Digital thermoregulator Glass	<b>892001893</b>	<b>260</b>
Finishing frame for plasterboard	<b>892008960</b>	<b>200</b>
Set of castors	<b>892009260</b>	<b>105</b>
Supporting framework for masonry	<b>892008950</b>	<b>300</b>



Technical features	HWT S78F	HWT S78F FASTL	HWT S78F FASTR
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>90x69x171 - 420</b>	<b>106x69x171 - 430</b>	<b>106x69x171 - 430</b>
Heat input <b>kW</b>	<b>34.3</b>	<b>34.3</b>	<b>34.3</b>
Nominal Heat Output <b>kW</b>	<b>29.7</b>	<b>29.7</b>	<b>29.7</b>
Water Heat Output <b>kW</b>	<b>14.6</b>	<b>14.6</b>	<b>14.6</b>
Efficiency %	<b>86.4</b>	<b>86.4</b>	<b>86.4</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>11 - 27</b>	<b>11 - 27</b>	<b>11 - 27</b>
Recommended fuel quantity <b>kg/h</b>	<b>8</b>	<b>8</b>	<b>8</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A+</b>	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.

# Termopalex HWT S86 Front



## Firebox versions

		€
HWT S86F	<b>802712561</b>	<b>7,240</b>
HWT S86F FASTL	<b>802732571</b>	<b>8,540</b>
HWT S86F FASTL DHW	<b>802732551</b>	<b>8,820</b>
HWT S86F FASTR *	<b>802712571</b>	<b>8,540</b>
HWT S86F FASTR DHW	<b>802712551</b>	<b>8,820</b>

## Specifications and standard fittings:

- central heating firebox with a steel open vented vessel
- firebox made of **Thermofix**
- sturdy sliding door system that makes the door glide smoothly open
- glass can be tilted by 40° for cleaning purposes
- stainless steel open expansion vessel
- innovative 16-tubes heat exchanger with turbulators
- by-pass valve expels flue gases when the door is opened
- accurate combustion management and control by adjusting primary/secondary air
- predisposition for the connection of the external air intake at the bottom or at the side
- aesthetic cast iron firewood holder supplied as standard

**FAST:** equipped as standard with hydraulic separation system (two circulation pumps and an heat exchanger for system separation) steel open vented vessel and a digital thermoregulator

**FAST DHW:** equipped as standard with hydraulic separation system with production of DHW (two circulation pumps, an heat exchanger for system separation and production of DHW, an anti-scald valve) steel open vented vessel and a digital thermoregulator

**FASTR:** hydraulic unit mounted on the right

**FASTL:** hydraulic unit mounted on the left

## Optional

Digital thermoregulator Glass	<b>892001893</b>	<b>260</b>
Finishing frame for plasterboard	<b>892009210</b>	<b>220</b>
Set of castors	<b>892009260</b>	<b>105</b>
Supporting framework for masonry	<b>892009200</b>	<b>320</b>



Technical features	HWT S86F	HWT S86F FASTL	HWT S86F FASTR
Dimensions <b>WxDxH cm</b> - Weight <b>kg</b>	<b>100x78x171 - 496</b>	<b>115x78x171 - 506</b>	<b>115x78x171 - 506</b>
Heat input <b>kW</b>	<b>33.8</b>	<b>33.8</b>	<b>33.8</b>
Nominal Heat Output <b>kW</b>	<b>29</b>	<b>29</b>	<b>29</b>
Water Heat Output <b>kW</b>	<b>19.7</b>	<b>19.7</b>	<b>19.7</b>
Efficiency %	<b>85.6</b>	<b>85.6</b>	<b>85.6</b>
Dust - OGC (13% O <sub>2</sub> ) <b>mg/Nm<sup>3</sup></b>	<b>14.4 - 29</b>	<b>14.4 - 29</b>	<b>14.4 - 29</b>
Recommended fuel quantity <b>kg/h</b>	<b>8</b>	<b>8</b>	<b>8</b>
Flue gas outlet <b>cm</b>	<b>25</b>	<b>25</b>	<b>25</b>
Energy Rating	<b>A+</b>	<b>A+</b>	<b>A+</b>

The prices are shown in EURO, VAT not included. \*Version shown in the picture.



**Flue parts** p.144  
**Hydronic accessories** p.146  
**Hot air distribution/ducting** p.152  
**Pellet feed systems** p.160  
**Common accessories** p.161

# Accessories

## FLUE PARTS


### Long and short flue



		€
Ø 12x25 cm	<b>002360103</b>	<b>40</b>
Ø 12x50 cm	<b>002360102</b>	<b>55</b>
Ø 12x100 cm	<b>002360101</b>	<b>85</b>
Ø 15x25 cm	<b>002360108</b>	<b>45</b>
Ø 15x50 cm	<b>002360107</b>	<b>60</b>
Ø 15x100 cm	<b>002360106</b>	<b>90</b>
Ø 16x25 cm	<b>002360113</b>	<b>45</b>
Ø 16x50 cm	<b>002360112</b>	<b>60</b>
Ø 16x100 cm	<b>002360111</b>	<b>90</b>
Ø 18x25 cm	<b>002360800</b>	<b>60</b>
Ø 18x50 cm	<b>002360801</b>	<b>75</b>
Ø 18x100 cm	<b>002360802</b>	<b>105</b>
Ø 20x25 cm	<b>002360118</b>	<b>60</b>
Ø 20x50 cm	<b>002360117</b>	<b>75</b>
Ø 20x100 cm	<b>002360116</b>	<b>105</b>

Flue connection in matt black painted steel.

### Flue with damper

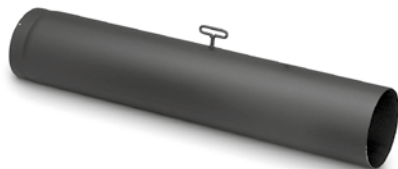

		€
Ø 12x100 cm	<b>002360125</b>	<b>95</b>
Ø 15x100 cm	<b>002360126</b>	<b>100</b>
Ø 16x100 cm	<b>002360123</b>	<b>100</b>
Ø 20x100 cm	<b>002360124</b>	<b>110</b>

Flue connection in matt black painted steel.

### Wall finishing kit



		€
Ø 12 cm	<b>002340073</b>	<b>50</b>
Ø 15 cm	<b>002340074</b>	<b>50</b>
Ø 16 cm	<b>002340046</b>	<b>50</b>
Ø 18 cm	<b>002360820</b>	<b>50</b>
Ø 20 cm	<b>002340047</b>	<b>50</b>

Wall finishing kit in matt black painted steel.

The prices are shown in EURO, VAT not included.

## FLUE PARTS

### 90° and 45° elbows



		€
90° Elbow - 3 sectors Ø 12 cm	<b>002340035</b>	<b>75</b>
90° Elbow - 3 sectors Ø 15 cm	<b>002340036</b>	<b>85</b>
90° Elbow - 3 sectors Ø 16 cm	<b>002340037</b>	<b>85</b>
90° Elbow - 3 sectors Ø 18 cm	<b>002360811</b>	<b>95</b>
90° Elbow - 3 sectors Ø 20 cm	<b>002340038</b>	<b>95</b>
90° Elbow - Extensible with damper and inspection Ø 16 cm	<b>002340048</b>	<b>145</b>
90° Elbow - With damper and cleaning cap, Ø 20 cm	<b>002340049</b>	<b>160</b>
45° Elbow Ø12 cm	<b>002340055</b>	<b>70</b>
45° Elbow Ø15 cm	<b>002340056</b>	<b>75</b>
45° Elbow Ø16 cm	<b>002340057</b>	<b>75</b>
45° Elbow Ø18 cm	<b>002360810</b>	<b>85</b>
45° Elbow Ø20 cm	<b>002340058</b>	<b>85</b>

Flue connection in matt black painted steel.

### Flue connectors



		€
45° Alu. steel elbow Ø 20 each	<b>002340000</b>	<b>55</b>
45° Alu. steel elbow Ø 25 each	<b>002340001</b>	<b>60</b>
Alu. steel reduction 25-20 cm each	<b>002340010</b>	<b>95</b>
Alu. steel reduction 30-25 cm each	<b>002340011</b>	<b>85</b>

Accessories in aluminised steel for flue connectors.

### Combustion air kit



		€
Combustion air kit	<b>892009150</b>	<b>135</b>

Combustion air hose connector kit Ø 60 - Ø 40 - Ø 25.

The prices are shown in EURO, VAT not included.

## HYDRONIC ACCESSORIES

---

### Digital thermoregulator Glass



Digital glass thermoregulator with touch controls.

		€
Digital thermoregulator Glass	<b>892001893</b>	<b>260</b>

### Box for wall installation for thermoregulator



Box for wall installation of the kit built-in control unit

		€
Box for wall installation for thermoregulator	<b>002540065</b>	<b>35</b>

### Electronic thermostat with immersion probe



Electronic thermostat with immersion probe on which it is possible to set the desired temperature and a temperature interval that activates the output of a clean contact by means of a NO/NC relay.

		€
Electronic Thermostat	<b>002140132</b>	<b>105</b>

---

The prices are shown in EURO, VAT not included.

## HYDRONIC ACCESSORIES

### 1L Kit for system separation



		€
Kit L1 (high efficiency)	<b>892006701</b>	<b>990</b>

Consisting of a plate heat exchanger (40kW), a one-way valve, two circulation pumps and an electronic control unit. Allows you to connect the central heating firebox to a pre-existing system (e.g. gas boiler with radiators) separating the primary circuit from the secondary one. The kit includes two circulation pumps, one plate heat exchanger and one electronic control unit.

### L2 Instantaneous DHW production kit



		€
Kit L2 (high efficiency)	<b>892006721</b>	<b>930</b>

Consisting of a circulation pump, a plate heat exchanger (20kW), a one-way valve, a three-way diverter valve, an electronic control unit and a flow meter. It instantly produces hot water for domestic use while managing the heating system.

- Recommended for models transferring more than > 18/20 kW power to the water.

The prices are shown in EURO, VAT not included.

## HYDRONIC ACCESSORIES

---

### 3L Separation and instantaneous DHW production kit



		€
Kit L3 (high efficiency)	<b>892006741</b>	<b>1,625</b>

Consisting of two circulation pumps, two plate heat exchangers (one 40 kW one to separate the system and one 20 kW one to produce DHW), one three-way diverter valve with an electric DHW servomotor, a flow meter and an electronic control unit. Allows you to connect a central heating firebox to a pre-existing heating system (e.g. gas boiler with radiators) while separating the primary circuit from the secondary one, as well as instantly producing DHW.

---

### L5 Separation kit and domestic hot water puffer management



		€
Kit L5 New (high efficiency)	<b>892006761</b>	<b>1,245</b>

Consisting of two circulation pumps, one plate heat exchanger (40 kW), one three-way diverter valve, one one-way valve and an electronic control unit. Can connect a central heating firebox to a preexisting heating system (e.g. gas boiler with radiators) while separating the primary circuit from the secondary one, as well as instantly producing DHW.

---

The prices are shown in EURO, VAT not included.

## HYDRONIC ACCESSORIES

### Kit P1 for system separation



		€
Kit P1 for system separation	<b>892006711</b>	<b>820</b>

Consisting of a 30 kW plate heat exchanger, a one-way valve, a circulation pump and an electronic control unit. It makes it possible to combine a pellet or wood stove with a pre-existing system such as a gas boiler with radiators, while separating the primary circuit from the secondary one.

### Kit P2 for instantaneous DHW production



		€
Kit P2 for instantaneous dhw production	<b>892006690</b>	<b>700</b>

Consisting of a 16 kW plate heat exchanger, a three-way diverter valve, a flow meter, a one-way valve and an electronic control unit. It instantly produces hot water for domestic use while managing the heating system.

Recommended for models transferring more than > 18/20 kW power to the water.

The prices are shown in EURO, VAT not included.

## HYDRONIC ACCESSORIES

---

### Kit P3 separation and instantaneous DHW production



		€
Kit P3 separation and instantaneous dhw production	<b>892006751</b>	<b>1,320</b>

Consisting of a circulation pump, two plate heat exchangers (one 30 kW one to separate the systems and a 16 kW one for DHW production), one three-way diverter valve with electric DHW servomotor, a flow meter and an electronic control unit. It makes it possible to combine a pellet or wood stove with a pre-existing system such as a gas boiler with radiators, while separating the primary circuit from the secondary one and instantly producing hot water for domestic use.

---

### Kit P5 for storage tank



		€
Kit P5 for storage tank	<b>892006771</b>	<b>1,075</b>

Consisting of a circulation pump, a 30 kW plate heat exchanger, a three-way diverter valve, a one-way valve and an electronic control unit. DHW storage tank separation and management kit. It makes it possible to combine a pellet or wood stove with a pre-existing system such as a gas boiler with radiators, while separating the primary circuit from the secondary one and managing a storage tank for the production of instant DHW.

---

The prices are shown in EURO, VAT not included.

## HYDRONIC ACCESSORIES

---

### Closed expansion tank



		€
5 lt - 10 bar 3/4"	<b>002050704</b>	<b>60</b>
18 lt - 10 bar 3/4"	<b>002050705</b>	<b>70</b>
24 lt - 10 bar 3/4"	<b>002050710</b>	<b>85</b>

---

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

---

### Flexible aluminium Liscioflex hose



Flexible, double-wall tube in aluminium to duct hot air up to a temperature of 300°C. Corrugated on the outside and smooth on the inside. Dimensions of 30-metre roll pack: Ø 80: 90x90x55 cm; Ø 100: 100x100x65 cm.

		€
Ø 10 cm (30-metre roll)	<b>002340801</b>	<b>540</b>
Ø 8 cm (30-metre roll)	<b>002340800</b>	<b>500</b>

### Air tube insulation



		€
Ø 10 cm (1 M)	<b>002720124</b>	<b>35</b>
Ø 8 cm (1 M)	<b>002720123</b>	<b>35</b>

### Aluminium hot air tube connector



		€
Ø 10 cm stainless steel each	<b>002340821</b>	<b>20</b>
Ø 8 cm stainless steel each	<b>002340820</b>	<b>15</b>

### Steel clamp



		€
Steel Ø 6-11 cm each	<b>002330097</b>	<b>35</b>

Set of 6 pieces.  
Price refers to a single unit.

---

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

### Feature vent



Feature vent in white painted steel with collar to connect it to the hose Ø14 with grid.


		€
White feature vent	<b>892007180</b>	<b>140</b>

### Adjustable vent



		€
Adjustable round vent Ø 120	<b>892008790</b>	<b>295</b>
Adjustable rectangular vent Ø 120	<b>892008800</b>	<b>270</b>

### Straight vent arrangement flush with the wall

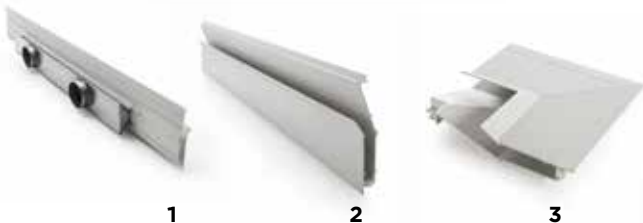

		€
1 Straight vents with diffuser 2 x Ø 120	<b>892008810</b>	<b>315</b>
2 Extension for straight vent	<b>892008811</b>	<b>210</b>
3 Corner element for straight vents	<b>892008820</b>	<b>200</b>

### Fan-assisted air conveying system



Fan-assisted air conveying system to transport air between two adjacent rooms. Consisting in an axial fan with a thermal overload protector fitted on a support with a grid. Provided with a second independent grid.

		€
18/16 Watt with grids (15x15)	<b>892006310</b>	<b>95</b>
19/17 Watt with grids (20x20)	<b>892006320</b>	<b>170</b>

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

### Vents



White vents with connectors.

		€
Dim. 6x15 cm - conn. Ø 8 each	<b>162560220</b>	<b>80</b>
Dim. 10x20 cm - conn. Ø 12 each	<b>162560210</b>	<b>95</b>
Dim. 15x25 cm - conn. Ø 14 each	<b>162560230</b>	<b>95</b>
Dim. 17x17 cm - conn. Ø 14 each	<b>162560181</b>	<b>95</b>

### Kit of 2 outlet vents



2 adjustable outlet vents in anodised aluminium with white coloured fitting and corrugated hose; 2 grids with gate valves with vents; 2 ext. alu. hoses, dim.: 140 L. 1500.

		€
Kit of 2 outlet vents	<b>892003950</b>	<b>185</b>

### Heat outlet grid



		€
27,5 x 7,3 cm	<b>892502530</b>	<b>70</b>

### Inspection grid



		€
Grid with frame 38x15	<b>162560260</b>	<b>85</b>

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

### Air intake grids



		€
Brown 23x23 cm	<b>002352000</b>	<b>20</b>
White 23x23 cm	<b>002352001</b>	<b>20</b>
White 21x16 cm with closure	<b>002352002</b>	<b>20</b>

### Hose



Aluminium hose.

		€
Ø 8 cm x 150 each	<b>002360000</b>	<b>20</b>
Ø 12 cm x 150 each	<b>002360003</b>	<b>20</b>
Ø 12 cm x 300 each	<b>002360004</b>	<b>35</b>
Ø 14 cm x 150 each	<b>002360006</b>	<b>20</b>
Ø 14 cm x 300 each	<b>002360007</b>	<b>35</b>


### Reductions and connectors



		€
Union Y Ø 10 cm each	<b>002340100</b>	<b>50</b>
Union Y Ø 12 cm each	<b>002340101</b>	<b>50</b>
Union Y Ø 14 cm each	<b>002340102</b>	<b>50</b>
Union T Ø 12 cm each	<b>002340151</b>	<b>50</b>
Union T Ø 14 cm each	<b>002340152</b>	<b>50</b>
Reduction from 16 to 14 cm each	<b>152321260</b>	<b>35</b>

## HOT AIR DISTRIBUTION / DUCTING

### Fan kit with built-in digital control unit

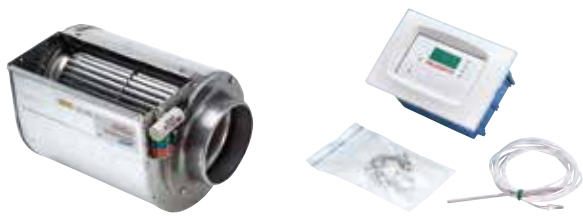

Centrifugal electric fan (80W) with built-in electronic control unit featuring automatic or manual fan adjustment. The digital display shows the air temperature: in the automatic mode it adjusts fan speed according to the temperature of the fireplace making it possible to convey air to various rooms.

		€
Fan kit with built-in digital control suitable for mbl 3d	<b>892004490</b>	<b>615</b>
Fan kit with built-in digital control unit - 680 m <sup>3</sup> /h with leg extension for e16:9 and s25:9	<b>892003780</b>	<b>615</b>
Fan kit with built-in digit. control for mbl 16:9 3d	<b>892008010</b>	<b>615</b>
Fan kit with built-in digital control unit - 850 m <sup>3</sup> /h	<b>892004060</b>	<b>595</b>

### Natural ventilation kit in hood for GTM



The kit consists of a front infill bracket, a corrugated hose, two wall brackets, four wall clamps and two adjustable vents painted in white.

		€
Natural ventilation for hood GTM70	<b>892009570</b>	<b>160</b>
GTM80 natural ventilation for hood 80	<b>892009571</b>	<b>170</b>
GTM80 natural ventilation for hood 80 R/L	<b>892009790</b>	<b>170</b>
GTM90 natural ventilation for hood	<b>892009572</b>	<b>180</b>

### Front fan kit for GTM



A kit composed of a tangential fan and fixing brackets to be installed inside the product. It must be installed in the GTM before placing the product.

		€
Front fan kit for GTM70	<b>892009540</b>	<b>160</b>
Front fan kit for GTM80	<b>892009541</b>	<b>170</b>
Front fan kit for GTM80 R/L	<b>892009810</b>	<b>170</b>
Front fan kit for GTM90	<b>892009542</b>	<b>180</b>

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

### Ducting kit for GTM



The kit is made up of a centrifugal fan, infill brackets, a corrugated hose, two wall brackets, four wall clamps and two adjustable vents painted in white. It must be installed in a special compartment to be provided under the GTM.

		€
Centrifugal kit for GTM70	<b>892009550</b>	<b>505</b>
Centrifugal kit for GTM80	<b>892009551</b>	<b>515</b>
Centrifugal kit for GTM80 R/L	<b>892009800</b>	<b>515</b>
Centrifugal kit for GTM90	<b>892009552</b>	<b>525</b>

### Ducting kit for MX



The kit is made up of a centrifugal fan, a corrugated hose and two wall clamps.

		€
Centrifugal kit for MX	<b>892009640</b>	<b>390</b>
Centrifugal kit for MX 25:9	<b>892009650</b>	<b>415</b>

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

### Pro2 Ducting Kit



Pro2 Ducting Kit. Hot air outlet Ø8 cm

		€
PRO2 KIT	<b>892010200</b>	<b>190</b>

### Fan kit for WTX



Radial fan for WTXe.

		€
Radial fan kit for WTX	<b>892009780</b>	<b>290</b>

### ET4W control unit



Digital control unit. ET4W technology to control the fan from your smartphone in the wifi mode by means of the Palazzetti App. The control unit is also provided with a radio receiver so that it can be controlled from the Shape remote control (optional).

		€
ET4W control unit	<b>892009590</b>	<b>505</b>

### Glass control unit



Glass built-in digital control unit with temperature probe.

		€
Glass control unit	<b>895753560</b>	<b>200</b>

The prices are shown in EURO, VAT not included.

## HOT AIR DISTRIBUTION / DUCTING

### Digital control unit in polycarbonate



		€
Digital control unit	<b>002520014</b>	<b>200</b>

Flush-mounted digital control unit in polycarbonate.

### Box for wall installation for digital control unit



		€
For digital control unit	<b>002540064</b>	<b>35</b>
For digital control unit (ET4W)	<b>892009240</b>	<b>35</b>

The digital control unit wall box lets you install the digital control unit on the wall.

### Wall-mounted speed variator



		€
Wall-mounted speed variator	<b>892004370</b>	<b>105</b>

Wall-mounted manual speed variator for the GTM front fan.

### Charlotte thermal storage kit



		€
Charlotte thermal storage kit	<b>892010010</b>	<b>330</b>

The prices are shown in EURO, VAT not included.

## PELLET FEED SYSTEMS

---

### Pellet feed kit



Pellet feeding system for Ecofire® for building in, provided with metal hatch kit and hose.

		€
Feeding kit for ecofire Small 54	<b>892005850</b>	<b>325</b>
Pellet feed kit	<b>892006542</b>	<b>240</b>


### Front feed kit for Ecofire® for building in



Front feeding kit for Ecofire® for building in.

		€
Front drawer kit for A70S	<b>892010270</b>	<b>490</b>
For Small 54	<b>892005960</b>	<b>335</b>

### Hopper unit with additional fuel hopper

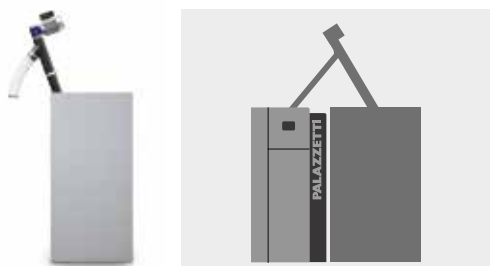

Additional, mobile, reversible hopper with a capacity of 230 kg and a feed unit, for JPS pellet-burning boilers.

		€
Hopper unit with additional fuel hopper	<b>892010170</b>	<b>2,800</b>

## COMMON ACCESSORIES

### Cast iron ash grate



Various-sized cast iron ash grates.

		€
30x16 cm	<b>892600011</b>	<b>50</b>
30x22 cm	<b>162510020</b>	<b>50</b>
34x27 cm	<b>162510030</b>	<b>60</b>

### Ash pans



Various-sized ash pans.

		€
30x16 cm	<b>165120010</b>	<b>40</b>
30x22 cm	<b>165120020</b>	<b>40</b>
34x27 cm	<b>165120050</b>	<b>50</b>

### Supporting framework



Adjustable metal support

		€
Large supporting framework (85x45 cm)	<b>892009700</b>	<b>315</b>
Supporting framework (63x38 cm)	<b>892002910</b>	<b>210</b>

### Infill frame



Infill profiles for Ecopalex GTM in black painted perforated sheet metal. Width 15cm.

		€
Frame for GTM70	<b>892009580</b>	<b>140</b>
Frame for GTM80	<b>892009581</b>	<b>150</b>
Frame for GTM80 R/L	<b>892009591</b>	<b>180</b>
Frame for GTM90	<b>892009582</b>	<b>160</b>

The prices are shown in EURO, VAT not included.

## COMMON ACCESSORIES

---

### Infill frame



Compensation profiles for A70S insert in black painted sheet metal. Width 3.5 cm.

		€
Profile for A70S	<b>892008673</b>	<b>140</b>
Profile for A70S with ducting kit	<b>892008674</b>	<b>140</b>
Profile for A70S with drawer	<b>892010290</b>	<b>140</b>

### Magnofix fireplace kit



Magnofix internal lining kit for the hearths of stoves with T3Mini platform (Emily, Flo...).

		€
Magnofix kit - T3 Mini	<b>892010020</b>	<b>155</b>

**Control devices** p.164  
**Hearth pads/firewood holder** p.167  
**Cooking accessories** p.169  
**Cleaning and maintenance accessories** p.170

# Complementary accessories

They upgrade and/or simplify  
the use of our products.

## CONTROL DEVICES

### Display Premium



Premium control panel with color graphic touchscreen display

SUGGESTED  
PRICE

€

Premium panel	<b>892009760</b>	<b>175</b>
---------------	------------------	------------

### Universal Gateway



Universal Gateway is the central hub of Palazzetti connectivity: an advanced device that integrates the entire ecosystem, enabling intelligent and remote control of stoves. It ensures a stable and secure connection, enhancing operational efficiency and user experience. With Universal Gateway and the Palazzetti app, you can remotely manage Palazzetti stoves, monitor their performance in real time, and easily integrate the system's wireless accessories—for personalized comfort always under control.

SUGGESTED  
PRICE

€

Universal Gateway	<b>892009404</b>	<b>120</b>
-------------------	------------------	------------

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## CONTROL DEVICES

### My Cli-Mate



Remote temperature sensor for the automatic management of Palazzetti pellet stoves. It can be placed on a stand or on the wall. Depending on the stove model, up to three My Cli-Mate can be managed. **Compatibility with pellet stoves is ensured exclusively if equipped with the Universal Gateway.**

SUGGESTED  
PRICE

€

My Cli-Mate White	892009402	65
My Cli-Mate Black	892009401	65

### My Cli-Mate Plus



My Cli-Mate Plus is the remote sensor for the automatic management of Palazzetti pellet stoves with Universal Gateway. It detects room temperature and humidity, communicates with the stove to optimize comfort, and features a large, bright display and physical buttons for easy parameter adjustment. Up to three devices can be connected per stove, depending on the model. **Compatibility with pellet stoves is ensured exclusively if equipped with the Universal Gateway.**

SUGGESTED  
PRICE

€

My Cli-Mate Plus	892009407	140
------------------	-----------	-----

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## CONTROL DEVICES

### Shape remote control



Elegant radio frequency remote control with backlit touch controls. Suitable for both pellet stoves and suitable wood-burning stoves. It is able to manage the main functions of the product to which it is combined. **Compatibility with pellet stoves is ensured exclusively if equipped with the Universal Gateway.**

SUGGESTED  
PRICE

€

Remote control Shape	892009020	75
----------------------	-----------	----

### Shape Plus remote control

SUGGESTED  
PRICE

€



Elegant remote control with display. Suitable for pellet stoves equipped with Universal Gateway. It can manage the main functions of the stove, control other connected devices, and read and transmit to the stove the temperature and humidity of the environment where it is placed. **Compatibility with pellet stoves is guaranteed only if equipped with Universal Gateway.**

Remote control Shape Plus	892009022	140
---------------------------	-----------	-----

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## HEARTH PADS / FIREWOOD HOLDER

### Steel hearth pads



Steel hearth pads to protect the floor. Available in different forms and sizes.

SUGGESTED PRICE

€

Rounded rectangular 115x96	<b>892005900</b>	<b>325</b>
Round 110x94	<b>892005890</b>	<b>300</b>
Round 96x82	<b>892005880</b>	<b>225</b>

### Glass hearth pad



Transparent, tempered (8mm) glass hearth pads to protect the floor.

SUGGESTED PRICE

€

90x100	<b>892005910</b>	<b>225</b>
--------	------------------	------------

### Cast iron firewood holder



SUGGESTED PRICE

€

Cast iron firewood holder (47x29x8h)	<b>892009140</b>	<b>70</b>
--------------------------------------	------------------	-----------

### Steel firewood rack



Steel firewood rack

SUGGESTED PRICE

€

Steel firewood rack 69X20X17h	<b>155520200</b>	<b>130</b>
-------------------------------	------------------	------------

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## HEARTH PADS / FIREWOOD HOLDER

---

### Iron firewood holder



SUGGESTED  
PRICE

€

Steel firewood holder 55x24x22h	<b>895762910</b>	<b>55</b>
Steel firewood holder 54x13x21h	<b>892502820</b>	<b>85</b>

---

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## COOKING ACCESSORIES

### Small hotplate slab with handles



SUGGESTED  
PRICE

€

Small hotplate slab with handles	<b>892006550</b>	<b>250</b>
----------------------------------	------------------	------------

### Volcanic stone hotplate



SUGGESTED  
PRICE

€

Warming shelf for Charlotte	<b>892010090</b>	<b>155</b>
-----------------------------	------------------	------------

Warming shelf for Dorotea	<b>892010300</b>	<b>155</b>
---------------------------	------------------	------------

Lava stone warming shelf compatible with specific stove models.

### Grill with support



SUGGESTED  
PRICE

€

Grill 68x41 cm with support	<b>892000030</b>	<b>165</b>
-----------------------------	------------------	------------

Grill 50x41 cm with support	<b>893620020</b>	<b>145</b>
-----------------------------	------------------	------------

In some instances it may be useful to have a grill on a support. The frame is in steel while the grill itself is in stainless steel with a semi-circular cross-section and a drip pan to collect cooking fats.

### Bioplatt



SUGGESTED  
PRICE

€

Bioplatt 51x42 cm with support	<b>893400030</b>	<b>205</b>
--------------------------------	------------------	------------

Ideal to cook naturally without added condiments or fats, it is suitable for any type of food, from meat to fish, vegetables to cheese and even eggs. It is provided with a special system for collecting cooking fats which prevents annoying smoke from forming during use.

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## CLEANING AND MAINTENANCE ACCESSORIES

### Palazzetti Cleaning Kit



**SUGGESTED  
PRICE**

€

Palazzetti Cleaning Kit	<b>892008320</b>	<b>100</b>
-------------------------	------------------	------------

Set of 6 pieces.  
Price refers to a single unit.

<b>Spare parts</b>		<b>€</b>
--------------------	--	----------

Bottles of glass cleaner Pack of 25x0.5 litre	<b>892009060</b>	<b>185</b>
--	------------------	------------

Pack of 12 hepa filters	<b>002140040</b>	<b>145</b>
-------------------------	------------------	------------

Pack of 10 self-extinguishing filters	<b>002140041</b>	<b>75</b>
--	------------------	-----------

Pack of 20 sponges for glass	<b>002970060</b>	<b>125</b>
------------------------------	------------------	------------

**A complete kit to clean and take care of your pellet stove, made up of:**

- 800 Watt ash vacuum cleaner with handle;
- Hepa filter;
- double, self-extinguishing filter bag cover;
- metal, plastic-coated hose with a set of attachments (round, metal suction pipe, flat suction pipe, removable brush, magnetic accessory for easy heat exchanger tube cleaning);
- specific ceramic glass detergent;
- glass cleaning sponge;
- microfibre cloth to clean the stove's outer surface;
- flexible pipe cleaner for gas tubes;
- gloves;
- pellet scoop.

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

## CLEANING AND MAINTENANCE ACCESSORIES

### Flexible brush



Brush for cleaning flue gas tubes in pellet stoves with a tube nest and a heat exchanger.

SUGGESTED  
PRICE

€

Flexible brusch (23x30 mm)*	<b>892006242</b>	<b>25</b>
Flexible brusch (28x30 mm)*	<b>892006211</b>	<b>25</b>
Flexible brusch (35x30mm)*	<b>892006210</b>	<b>25</b>

**\*Minimum order: 5 pieces.  
The price refers to one item.**

### Basic steel brush



SUGGESTED  
PRICE

€

Basic brush*	<b>895701320</b>	<b>20</b>
--------------	------------------	-----------

**\*Minimum order: 5 pieces.  
The price refers to one item.**

### Bottle of spray paint

SUGGESTED  
PRICE

€



Bottle of spray paint ivory I837	<b>892009117</b>	<b>55</b>
Bottle of spray paint grey I772	<b>892009119</b>	<b>55</b>
Bottle of spray paint grey I805	<b>892009118</b>	<b>55</b>
Bottle of spray paint moka I835	<b>892009115</b>	<b>55</b>
Bottle of spray paint black I789	<b>892009113</b>	<b>55</b>
Bottle of spray paint black I790	<b>892009112</b>	<b>55</b>
Bottle of spray paint red I831	<b>892009111</b>	<b>55</b>
Bottle of spray paint thermoblack	<b>892009110</b>	<b>55</b>
Bottle of spray paint I694	<b>004410040</b>	<b>55</b>

The prices shown are in Euro without VAT; specific conditions of sale follow. Find out more.

# General sales terms and conditions

---

## GENERAL TERMS AND CONDITIONS OF SALE BETWEEN PALAZZETTI LELIO S.P.A AND RETAILERS

### 1. General provisions

The terms and conditions indicated below (“General terms and conditions of sale”) regulate the relations between Palazzetti Lelio S.p.A. (Palazzetti) and the Retailer (Retailer) for the supply of Palazzetti products (the Products).

Any other condition or different term shall be valid only if confirmed by both parties in writing. Palazzetti reserves the right to modify, supplement or change the General Terms and Conditions of Sale by giving prior notice to the Retailer.

### 2. Orders

Retailers must send orders only in writing at the following address: orders@palazzetti.it. They will be considered as accepted only after having received Palazzetti’s written order confirmation. Changes to the order will only be made within 24 hours after receipt of the order confirmation. Furthermore, order changes will not be accepted at the time of loading. Palazzetti reserves the right to charge any costs due to late modifications of orders and will send a new order confirmation with the updated delivery terms. No modification can be made to orders for custom-sized or bespoke products if 72 hours have elapsed from the time the order was received.

### 3. Prices and payment terms

Prices of products refer to the price list in force at the time the Retailer places the order or when it is confirmed by Palazzetti. Palazzetti is entitled to modify current prices at any time, informing the Retailer by sending a new price list in paper or digital format. For all its sales channels (outlets, on-line sales, fairs, showrooms, shopping centers, etc.) the Retailer must comply with the business strategies adopted by Palazzetti. Any exception to this rule must be agreed upon in writing with the Palazzetti Sales Department (even by email).

Palazzetti usually modifies its price list once a year. Price list prices do not include taxes and are EX Works Porcia (Italy). Any delay or irregularity in payments gives Palazzetti the right to suspend all supplies in progress, change the payment terms and discounts for subsequent supplies, even requesting payment in advance or issuance of additional guarantees. Moreover, interest on arrears will be charged without the need of a formal notice.

The Retailer must pay invoices on their due date and in full and is not entitled to refuse, delay or suspend payments, not even in the case of exceptions or disputes between the parties.

Palazzetti formalizes that it does not accept compensation for credits with sums owed to the Retailer.

### 4. Delivery terms and returns

Unless otherwise agreed in writing, the delivery time specified is not binding for Palazzetti and, in any case, is not considered essential. The delivery date indicated on the order confirmation refers to the date on which the product is available for shipment on Palazzetti’s premises. Palazzetti reserves the right to make partial deliveries.

In case of force majeure or other unpredictable events not attributable to Palazzetti, including - but not limited to - strikes, lockouts, public administration provisions, blocks or limitations on the possibility of exporting or importing, Palazzetti is exempt from the obligation to respect any pre-established delivery time.

Palazzetti undertakes to deliver the products within the agreed deadline but will in no case be responsible for any damages caused, directly or indirectly, by the late execution of a contract or by a delay in the delivery of the products.

The Retailer cannot return products, unless expressly authorized by Palazzetti to do so. Returned products must be in perfect condition, with the original packaging suitable for transport.

Any damage resulting from lack of the original packaging, or due to damaged and/or impaired packaging, will be charged to the Retailer. Palazzetti will only issue a credit note after having checked the condition of the returned goods on its premises.

### 5. Product inspection and acceptance

The Retailer must check the goods as soon as they are delivered and immediately inform Palazzetti of any non conformities. Claims referring to visible damage notified more than 24 hours after delivery will not be accepted.

If the Retailer decides to accept the goods, he must check:

- that the products delivered are addressed to his company according to the order confirmation received from Palazzetti;
- that the codes and the quantities of Products listed in the Delivery Note correspond to the codes and quantities actually delivered;
- the condition of the packaging of the Products.

If the Retailer finds something wrong, he must record any objection on the delivery note, in the form of a specific, not generic, remark. A non-specific remark (i.e. “accepted conditionally” or “pending review”) will be considered null and

---

void. Examples of a specific remark are: “damaged box”, “damaged packaging”, “wet packaging”, “incorrect storage”, “missing packages: code xyz quantity: p.ce xy”, etc. In addition, the Retailer must ask the delivery man for his name and surname which will be reported on the delivery note (in all copies). The delivery man must then sign each copy with a legible signature under his full name and these copies must also be countersigned by the Retailer (with his stamp).

## **6. Defects due to transportation damage reported after the goods have been accepted**

If defects attributable to transportation damage are found after the goods have been accepted, the Retailer must make a written claim before the end of the day on which the defect is discovered and, in any case, within 8 calendar days from the receipt of the goods.

The Retailer must send a detailed communication to Palazzetti within the terms indicated above through one of the following channels:

- email: by sending an email to [orders@palazzetti.it](mailto:orders@palazzetti.it) specifying the model and the type of damage, under the subject “damage during transportation” and attaching photographic documentation backing up the complaint;
- Palazzetti’s intranet: by accessing the [partner.palazzetti.it](http://partner.palazzetti.it) portal and performing the return request procedure using the reference “hidden damage during transport”.

Any communication made by telephone will be considered void.

Any Product received, for which no objection of conformity has been made in compliance with the procedure and the terms mentioned in this document, will be deemed approved and accepted by the Retailer.

## **7. Warranty**

Without prejudice to the additional conventional guarantees granted by Palazzetti, according to current European legislation, the Retailer is directly obliged to provide the legal warranty to the end customer, except for the right of redress against Palazzetti.

Palazzetti is only answerable for the original defects of the product, if the warranty claim arrives from the Retailer on time as specified by the legislation, and therefore there has been no revocation or prescription.

## **8. Intellectual property of Palazzetti S.p.A.**

The Retailer expressly acknowledges that the trademarks, trade names or other distinctive signs placed on the products are the exclusive property of Palazzetti and cannot be altered, modified, deleted or cancelled in any way.

The Retailer has a limited right to use trademarks, trade names or other distinctive signs, as well as any other industrial right or production and business know-how incorporated in the products (which remain the exclusive property of Palazzetti), with the only purpose of reselling goods to the public and, in any case, only with Palazzetti’s permission.

Any different use of Palazzetti’s intellectual property by the Retailer, if Palazzetti does not expressly grant it in writing, will be considered a violation of Palazzetti’s exclusive rights.

The documents, drawings, photos, data and information (both printed and in electronic format) that are delivered to the Retailer are the exclusive property of Palazzetti and produced to represent its Products and give an indicative idea of their performances. The Retailer is not authorized to reproduce them or disclose them to third parties without Palazzetti’s permission and undertakes to take all appropriate measures to make sure his employees apply these intellectual property protection rules. This also applies to advertising, presentations, events or products offered by the Retailer’s store or online.

Palazzetti reserves the unquestionable right to revoke any authorization to use its trademarks even during an ongoing business relationship.

## **9. Processing personal data**

The personal data of the Retailer will be processed in compliance with the provisions of Regulation (EU) 2016/679, known as GDPR (General Data Protection Regulation).

## **10. Applicable law**

It is understood that these General Terms and Conditions of Sale and all contracts stipulated between Palazzetti and the Retailer are governed by the Italian law.

## **11. Jurisdiction**

Any dispute arising between the parties as a result of the interpretation, validity or execution of these General Terms and Conditions of Sale and of ensuing contracts will be under the exclusive jurisdiction of the Court of Pordenone (Italy).









**Palazzetti Lelio S.p.a.**  
Via Roveredo, 103  
33080 Porcia (PN) Italia

[//palazzetigroup.com](http://palazzetigroup.com)

**PALAZZETTI**  
WARMTH WITH NATURAL APPEAL